


*Project* *Comments*

*Catalog #* *Prepared By*

*Type* *Date*

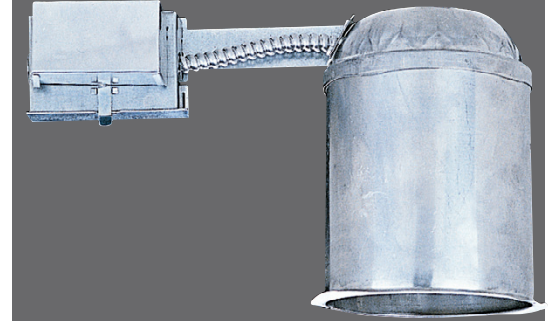

**DESCRIPTION**

- Suitable for new construction in residential and commercial applications.
- IC rated. Suitable for direct contact with insulation.
- Use one 18W double twin tube, G24Q-1 (not included).

**HOUSING**

- Aluminum construction provides greater heat dissipation.
- Washington State Energy Code approved to meet restricted airflow requirements.
- Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
- Ballast includes integral thermal protector guards against improper lamp use and misuse of insulation materials.
- 120V Electronic ballast.
- 7 1/2" height allows use in 2" x 8" joist construction.

**Plaster Frame**

- Housing is secured to plaster frame with screws and can be removed for access to junction box.
- Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

**JUNCTION BOX**


- Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
- Supplied with three IDEAL® push-in wire connectors.

**HANGER BARS**

- Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation.
- Bars can be repositioned 90° on plaster frame without tools.
- Bars fit onto T-bar spine for quick alignment and can be permanently secured.
- Score lines allow bars to be shortened without tools to accommodate a 12" joist span.


**LISTINGS**

- UL listed for direct contact with insulation
- UL damp location
- UL feed-through
- CUL

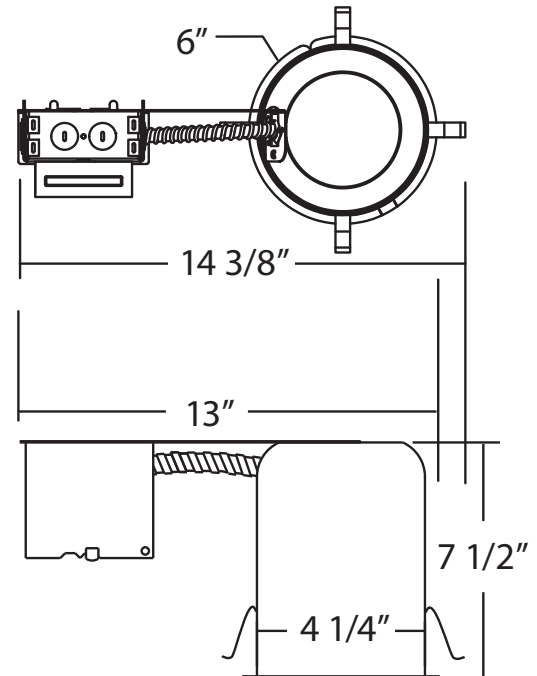




Order No	Description	Maximum Lamp Rating
15502	<b>Fresnel Shower</b> White	75W   BR30/PAR30 60W   A19 OD: 6&1/2" Wet Location Rated

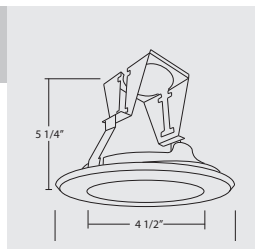

Order No	Description	Maximum Lamp Rating
15509	<b>Shower Drop Opal</b> White (shown)	1x13WW   G24Q-1 OD: 6&1/2" Wet Location Rated
15509OB	Oil-Rubbed Bronze	

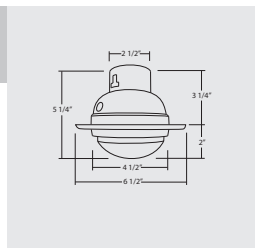

Order No	Description	Maximum Lamp Rating
15518BK	<b>Baffle</b> Black	1x13W   G24Q-1 OD: 6&1/2"
15518CL	Clear	
15518GD	Gold (shown)	
15158WH	White	
15518WHZ-ABZ	Wheat Haze (Aged Bronze Ring)	

