


Project *Comments*

Catalog # *Prepared By*

Type *Date*

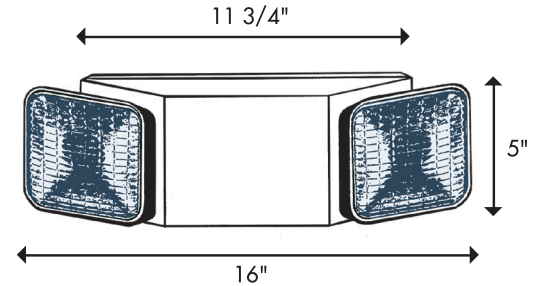

FEATURES

- Completely self-contained, fully automatic operation.
- Compact low-profile design in neutral finish.
- Universal mounting plate w/ Quick Connect for rapid installation.
- Push-to-test switch.
- 6-Volt pure lead maintenance-free battery.
- Environmentally-coated solid state charger.
- Automatic low voltage disconnect (LVD).
- Universal transformer for 120 or 277 VAC.
- V-O flame retardant, high-impact thermoplastic housing.
- Charge rate/power-on LED indicator light.
- Damp location listed.

ORDERING

Product No.	Watts for Total Connected Heads/Fixtures*				Warranty
	1 1/2 Hours	4 Hours	2 Hours	1 1/2 Hours	
18104	22	2	3	4	Yes

*USING 5W LAMPS

