


Project **Comments**

Catalog # **Prepared By**

Type **Date**

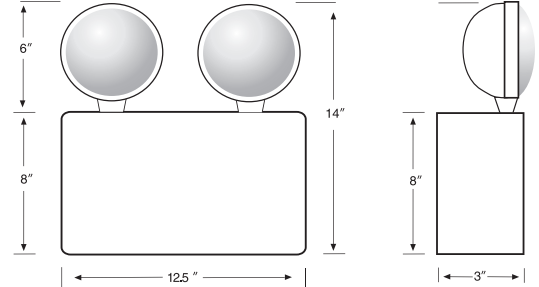

FEATURES

- Compact low-profile design in neutral finish.
- Push-to-test switch.
- 6-Volt pure lead maintenance-free battery.
- Side and top conduit knockouts.
- Automatic low voltage disconnect (LVD).
- Universal transformer for 120 or 277 VAC.
- Fully adjustable glare-free lighting heads standard.
- Charge rate/power-on LED indicator light.

ORDERING

Product No.	Voltage	Watts for Total Connected Heads/Fixures				Warranty
		1 1/2 Hours	4 Hours	2 Hours	1 1/2 Hours	
18107-6-50	6	50	2*	4*	6*	Yes
18107-6-100	6	100	4*	9*	12*	Yes
18107-12-50	12	50	2**	3**	5**	Yes
18107-12-100	12	100	4**	7**	10**	Yes

*USING 7.2W LAMPS, STANDARD
 **USING 9W LAMPS, STANDARD

