


Project *Comments*

Catalog # *Prepared By*

Type *Date*

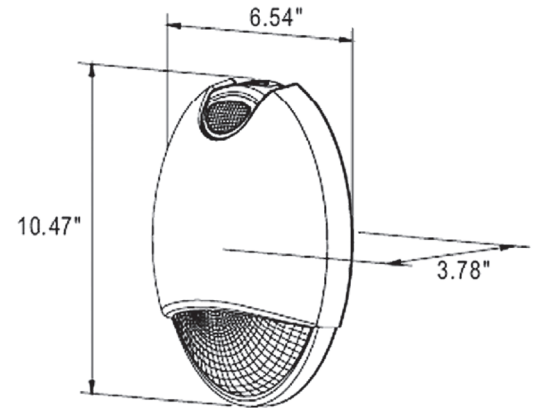

FEATURES

- Low-profile, decorative die-cast emergency lighting fixture.
- Standard powder-coated bronze finish.
- Polycarbonate lens and mirrored reflector for maximum illumination.
- Integrated test switch/pilot light.
- 6-Volt NiCad battery standard.
- Automatic low voltage disconnect (LVD).
- Universal transformer for 120 or 277VAC @ 60Hz.
- Two 6W Xenon lamps offer more light output than standard incandescent lamps.
- Automatic, low-voltage disconnect (LVD).
- Designed for wall mount or conduit through the top.
- Standard operation temperature of 32°F to 122°F.
- Cold weather (CW) option: operating temperature down to -28° F.
- Self-diagnostic models available.
- ETL listed for wet location.
- 5-Year Manufacturer's Warranty.

ORDERING

Product No.	Housing Color
• 18150BK	Black
• 18150BZ	Bronze
• 18150NK	Nickel
• 18150WH	White

