
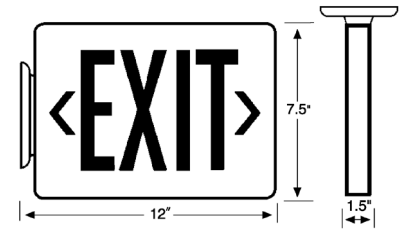


Project *Comments*

Catalog # *Prepared By*

Type *Date*

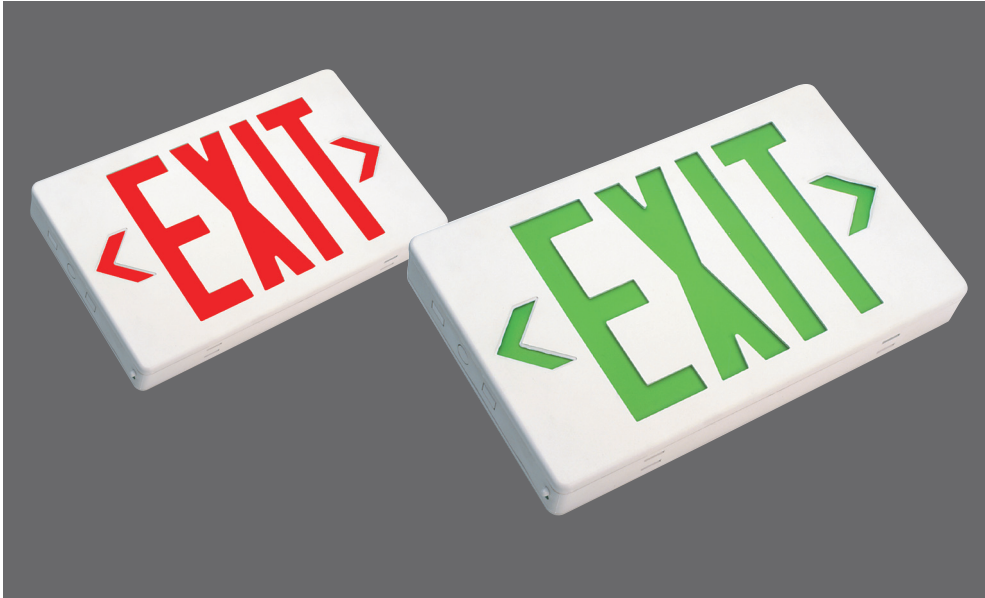

FEATURES

- Completely self-contained, fully automatic operation.
- Compact, low-profile design in neutral finish.
- Automatic low-voltage disconnect (LVD).
- Universal transformer for 120 or 277 VAC operation.
- V-O flame-retardant, high impact, thermoplastic housing.
- Power-on LED indicator light and push-to-test switch.
- Energy consumption: 3.2W for red letters, 3.8W for green.
- LED lamp life of 25+ years.
- Universal mounting canopy for side or top installation.
- Larger Ni-Cad emergency battery for remote capacity.
- Damp location listed.

ORDERING

Product No.	Housing Color	Lettering Color	No. Faceplates	Remote Capable
18200	White	Red	2	No
18200RB	Black	Red	2	No
18200RWR	White	Red	2	Yes
18200RBR	Black	Red	2	Yes
18200GREEN	White	Green	2	No
18200GB	Black	Green	2	No
18200GWR	White	Green	2	Yes
18200GBR	Black	Green	2	Yes