

14300AEB26

Double Twin 4" Fluorescent Universal Airtight Housing

Product Description

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 26W double twin tube, G24Q-1 (not included).

Construction

Aluminum construction provides greater heat dissipation.
Washington State Energy Code approved to meet restricted airflow requirements.
Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.
Ballast includes integral thermal protector guards against improper lamp installation and misuse of insulation materials.
120V Electronic ballast.
6 1/4" height allows use in 2" x 8" joist construction.

Plaster Frame

Housing is secured to plaster frame with screws and can be removed for access to junction box.
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

Junction Box

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three IDEAL® push-in wire connectors.



Installation

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

Project



Catalog



Type

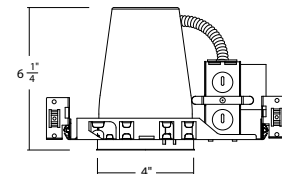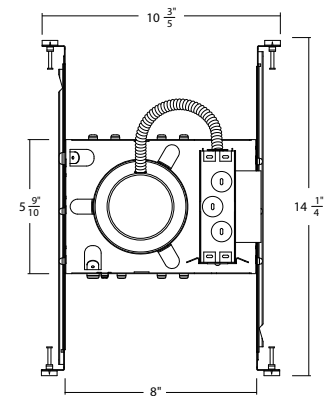


14300AEB26



Double Twin 4" Fluorescent Universal Airtight Housing



Specular Cone	Order No	Color	Maximum Lamp Rating
 	19503	Gold (shown)	1x13W G24Q-1 OD: 5"
	19503WHZ-ABZ	Wheat Haze (Aged Bronze Ring)	

Specular Cone	Order No	Color	Maximum Lamp Rating
 	19504	Clear	1x13W G24Q-1 OD: 5"

Albalite Shower	Order No	Color	Maximum Lamp Rating
 	19509BK	Black (shown)	1x13W G24Q-1 OD: 5" GE F13BX/835/A/ECO is recommended Wet Location Rated
	19509BZ	Bronze	
	19509CL	Clear	
	19509OB	Oil-Rubbed Bronze	
	19509WH	White	


Drop Opal Shower	Order No	Color	Maximum Lamp Rating
 	19510CL	Clear (shown)	1x13W G24Q-1 OD: 5" Wet Location Rated
	19510GD	Gold	
	19510WH	White	


Specular Cone	Order No	Color	Maximum Lamp Rating
 	19552CL	Clear	1x26W G24Q-3 OD: 4"
	19552MT	Matte	

Albalite Shower	Order No	Color	Maximum Lamp Rating
 	19555CL	Clear	1x26W G24Q-3 OD: 4"
	19555MT	Matte	

14300AEB26

Double Twin 4" Fluorescent Universal Airtight Housing

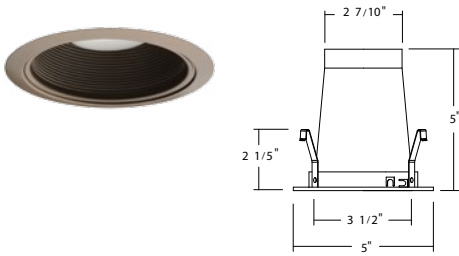Baffle	Order No	Color	Maximum Lamp Rating
	19550BKCL	Black Baffle/Clear	1x26W G24Q-3 OD: 4"
	19550NKCL	Brushed Nickel Baffle/Clear	
	19550OBCL	Oil-Rubbed Bronze Baffle/Clear (shown)	
	19550WHCL	White Baffle/Clear	

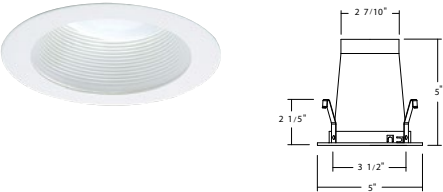Baffle	Order No	Color	Maximum Lamp Rating
	19550BK	Black	1x26W G24Q-3 OD: 4"
	19550NK	Brushed Nickel	
	19550OB	Oil-Rubbed Bronze	
	19550WH	White (shown)	