

# 17010AEBM2642

6" 1X26W, 32W, or 42W Vertical Housing

## Product Description

Suitable for new construction in residential and commercial applications.  
IC rated. Suitable for direct contact with insulation.  
Use one 26W, 32W or 42W lamp GX24Q-1 (not included)

### Construction

Aluminum construction provides greater heat dissipation.  
Ballast includes integral thermal protector guards against improper lamp use and misuse of insulation materials.  
Adjustable socket bracket assures proper and consistent lamp positioning.  
120V Magnetic ballast.  
7 3/4" height allows use in 2" x 8" joist construction.

### Plaster Frame

Housing is secured to plaster frame with screws and can be removed for access to junction box.  
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

### Junction Box

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.  
Supplied with three IDEAL® push-in wire connectors.

### Installation



Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation.  
Bars can be repositioned 90° on plaster frame without tools.  
Bars fit onto T-bar spine for quick alignment and can be permanently secured.  
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

Project

Catalog

Type

Date

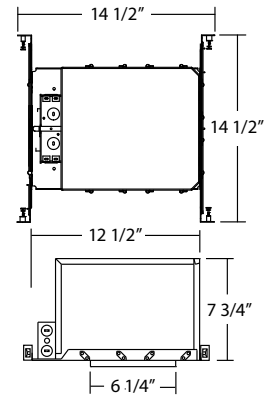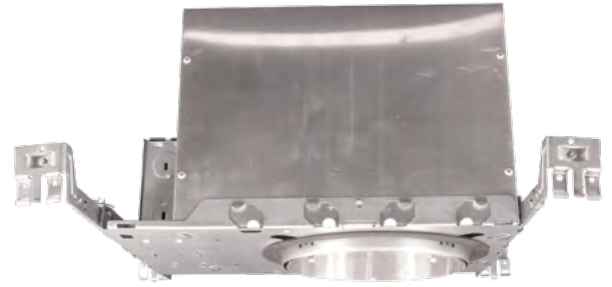

UNIVERSAL  
INPUT 120-277V  
BALLAST


IC RATED  
HOUSING


AIRTIGHT  
HOUSING

NICOR  
FASTENER

UL  
LISTED


**17010AEBM2642 | 6" 1X26W, 32W, or 42W Vertical Fluorescent Housing**


<b>Fresnel Lens</b>	<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
	17502BZ	Bronze (shown)	OD: 8" Wet Location Rated
	17502R	White (with reflector)	
	17502OB	Oil-Rubbed Bronze	
	17502	White (with metal trim ring)	
	17572WH	White (with plastic trim ring)	


<b>Lexan Shower   Albalite Lens</b>	<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
	17505BZ	Bronze (shown)	OD: 8" Wet Location Rated
	17505NK	Nickel	
	17505R	White (with reflector)	
	17505OB	Oil-Rubbed Bronze	
	17575	White (with plastic trim ring)	

<b>Lexan Drop Opal</b>	<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
	17509R	White (with reflector)	OD: 8" Wet Location Rated
	17509	White (shown with metal trim ring)	
	17509WH	White (with plastic trim ring)	


<b>Specular Reflector</b>	<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
	17518CL	Clear	OD: 7 1/4"
	17518WH	White	
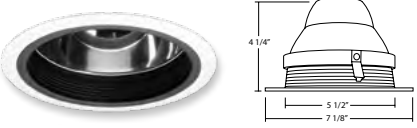
<b>Reflector   Baffle</b>	<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
	17520CL	Clear (Black/baffle)	OD: 7 1/8"
	17520CLWH	Clear (White/baffle)	


<b>Baffle   Fresnel Lens</b>	<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
	17522BK	Black	OD: 7"
	17522WH	White	


<b>Baffle   Albalite Lens</b>	<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
	17523BK	Black	OD: 7"
	17523WH	White	


**17010AEBM2642 | 6" 1X26W, 32W, or 42W Vertical Fluorescent Housing**

Baffle   Drop Opal	Order No	Color	Maximum Lamp Rating
	17524BK	Bronze (shown)	OD: 7 1/4"
	17524WH	White (with reflector)	

Baffle   Cone	Order No	Color	Maximum Lamp Rating
	17525BK	Black	OD: 7 1/2"
	17525BZ	Bronze	
	17525NK	Nickel	
	17525OB	Oil-Rubbed Bronze	
	17525WH	White	

Wall Wash   Baffle	Order No	Color	Maximum Lamp Rating
	17537BK	Black	OD: 7 1/4"
	17537WH	White	

Wall Washer   Reflector	Order No	Color	Maximum Lamp Rating
	17540BK	Black	OD: 7 1/4"
	17540CL	Clear	
	17540WH	White	

Reflector   Fresnel Lens	Order No	Color	Maximum Lamp Rating
	17604	Clear	OD: 7 1/4" Also requires 17600 Frame Insert