

<i>Project</i>	<i>Comments</i>
<i>Catalog #</i>	<i>Prepared By</i>
<i>Type</i>	<i>Date</i>



DESCRIPTION

- Suitable for new construction in residential and commercial applications.
- IC rated. Suitable for direct contact with insulation.
- Use two 13W double twin tube, G24Q-1 (not included).

HOUSING

- Aluminum construction provides greater heat dissipation.
- Ballast includes integral thermal protector guards against improper lamp use and misuse of insulation materials.
- Adjustable socket bracket assures proper and consistent lamp positioning.
- 120-277V Universal input electronic ballast.
- 7 3/4" height allows use in 2" x 8" joist construction.

Plaster Frame

- Housing is secured to plaster frame with screws and can be removed for access to junction box.
- Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX


- Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
- Supplied with three IDEAL® push-in wire connectors.

HANGER BARS

- Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation.
- Bars can be repositioned 90° on plaster frame without tools.
- Bars fit onto T-bar spine for quick alignment and can be permanently secured.
- Score lines allow bars to be shortened without tools to accommodate a 12" joist span.


LISTINGS

- UL listed for direct contact with insulation
- UL damp location
- UL feed-through
- CUL

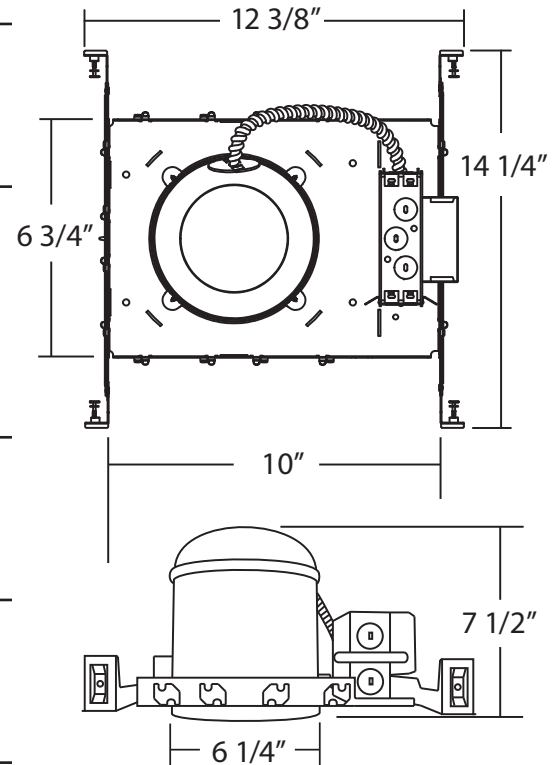





Order No	Description	Maximum Lamp Rating
	Lexan Shower Fresnel Lens	OD: 8" Wet Location Rated
17502BZ	Bronze (shown)	
17502R	White w/ Reflector	
17502OB	Oil-Rubbed Bronze	
17502	White w/ Metal Trim Ring	
17572WH	White w/ Plastic Trim Ring	

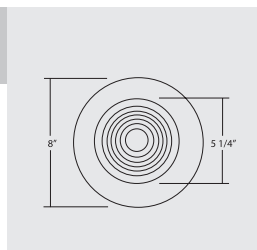


Order No	Description	Maximum Lamp Rating
	Lexan Shower Albalite Lens	OD: 8" Wet Location Rated
17505BZ	Bronze	
17505NK	Nickel	
17505R	White w/ Reflector	
17505OB	Oil-Rubbed Bronze	
17505	White w/ Metal Trim Ring (shown)	
17575WH	White w/ Plastic Trim Ring	

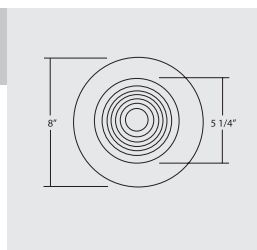


Order No	Description	Maximum Lamp Rating
	Specular	OD: 7"
17507BK	Black	
17507CL	Clear	
17507GD	Gold	
17507WH	White	

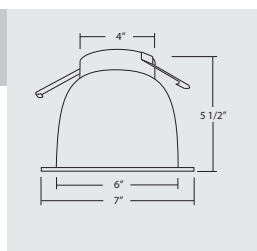

Order No	Description	Maximum Lamp Rating
	Lexan Drop Opal	OD: 8" Wet Location Rated
17509R	White w/ Reflector	
17509	White w/ Metal Trim Ring (shown)	
17579WH	White w/ Plastic Trim Ring	

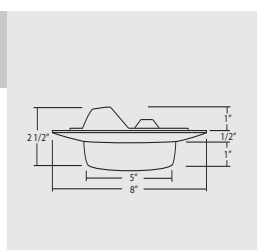


Order No	Description	Maximum Lamp Rating
	Baffle Fresnel Lens	OD: 7"
17522BK	Black	
17522WH	White (shown)	

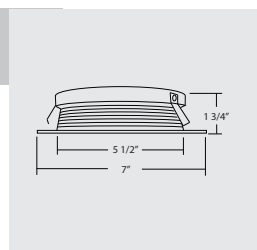





Order No	Description	Maximum Lamp Rating
17523BK	Baffle Albalite Lens Black (shown)	OD: 7"
17523WH	White	

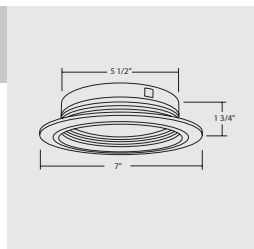


Order No	Description	Maximum Lamp Rating
17524BK	Baffle Drop Opal Black (shown)	OD: 7&1/4"
17524WH	White	

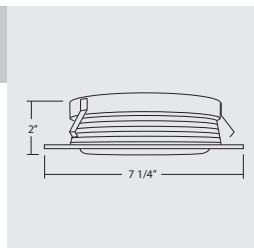


Order No	Description	Maximum Lamp Rating
17537BK	Wall Wash Baffle Black (shown)	OD: 7&1/4"
17537WH	White	

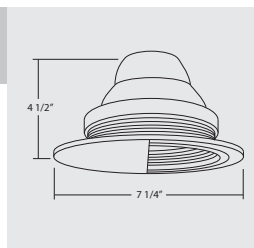

Order No	Description	Maximum Lamp Rating
17540BK	Wall Wash Reflector Black	OD: 7&1/4"
17540CL	Clear (shown)	
17540GD	Gold	
17540WH	White	

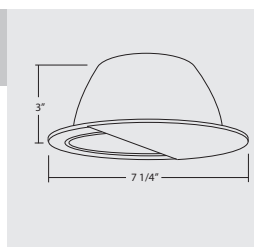

Order No	Description	Maximum Lamp Rating
17554	Ribbed Reflector Gold	OD: 7&1/4"

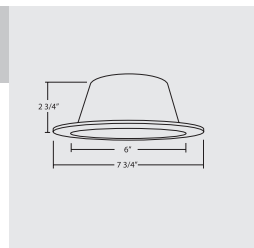

Order No	Description	Maximum Lamp Rating
17555	Ribbed Reflector Clear	OD: 7&1/4"

