


Project **Comments**

Catalog # **Prepared By**

Type **Date**

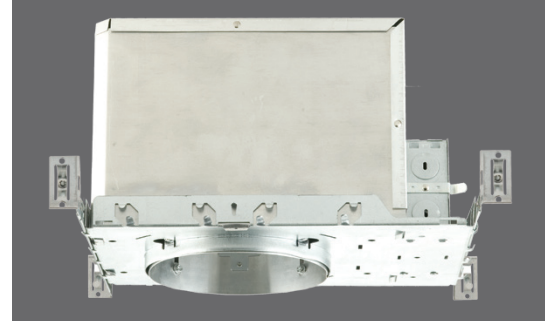

DESCRIPTION

- Suitable for new construction in residential and commercial applications.
- IC rated. Suitable for direct contact with insulation.
- Use two 13W double twin tube, G24Q-1 (not included).

HOUSING

- Aluminum construction provides greater heat dissipation.
- 120-277V Universal input electronic ballast.
- 7 3/4" height allows use in 2" x 8" joist construction.

Plaster Frame


- Housing is secured to plaster frame with screws and can be removed for access to junction box.
- Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX

- Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
- Supplied with three IDEAL® push-in wire connectors.

HANGER BARS

- Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation.
- Bars can be repositioned 90° on plaster frame without tools.
- Bars fit onto T-bar spine for quick alignment and can be permanently secured.
- Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

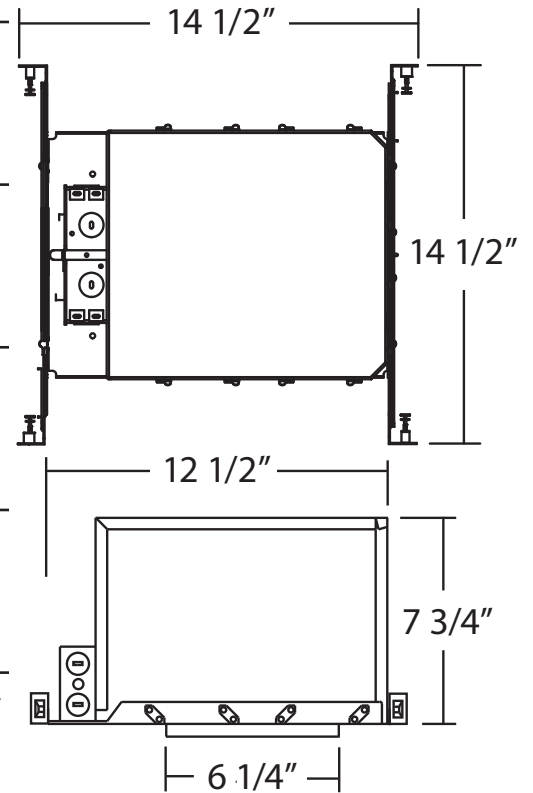


LISTINGS

- UL listed for direct contact with insulation.
- UL damp location
- UL feed-through
- CUL








Order No	Description	Maximum Lamp Rating
	Fresnel Lens	OD: 8" Wet Location Rated
17502BZ	Bronze (shown)	
17502R	White w/ Reflector	
17502OB	Oil-Rubbed Bronze	
17502	White w/ Metal Trim Ring	
17572WH	White w/ Plastic Trim Ring	

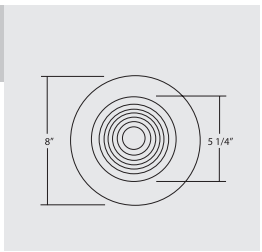


Order No	Description	Maximum Lamp Rating
	Lexan Drop Opal	OD: 8" Wet Location Rated
17509R	White w/ Reflector	
17509	White w/ Metal Trim Ring (shown)	
17579WH	White w/ Plastic Trim Ring	

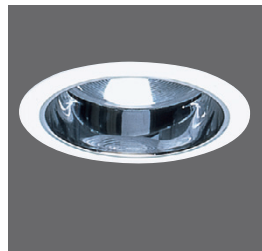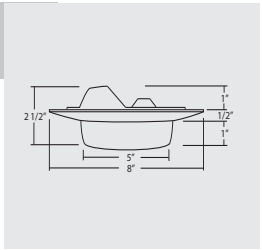


Order No	Description	Maximum Lamp Rating
	Reflector Fresnel Lens	OD: 7 & 1/4" Also Requires 17600 Frame Insert
17604		

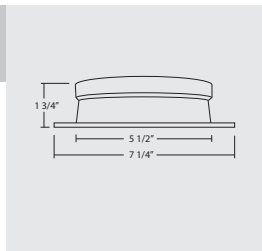


Order No	Description	Maximum Lamp Rating
	Reflector	OD: 7 & 1/2"
17607BK	Black (shown)	
17607CL	Clear	
17607GD	Gold	
17607WH	White	

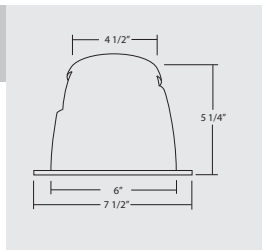

Order No	Description	Maximum Lamp Rating
	Clear Reflector Baffle	OD: 7"
17620BK	Black (shown)	
17620WH	Clear	

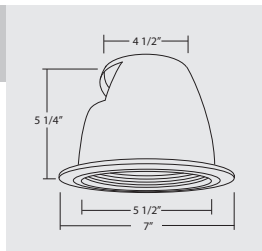


Order No	Description	Maximum Lamp Rating
	Baffle Wall Wash	OD: 7 & 3/8"
17627BK	Black (shown)	
17627WH	White	

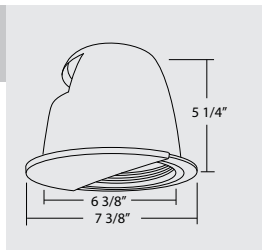



Order No	Description	Maximum Lamp Rating
17644CL	Reflector Clear	OD: 7&3/8"
17644GD	Gold (shown)	

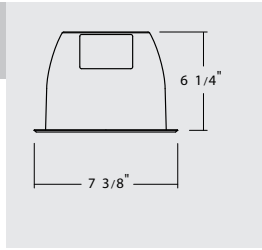

Order No	Description	Maximum Lamp Rating
17660BK	Baffle Drop Opal Black	OD: 7&1/4"
17660WH	White (shown)	

