

17017AEB26

6" Double Twin Fluorescent Compact Airtight Housing

Product Description

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 26W double twin tube, G24Q (not included).

Housing

Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.

Washington State Energy Code approved to meet restricted airflow requirements.

Aluminum construction provides greater heat dissipation.

Ballast includes integral thermal protector guards against improper lamp use and misuse of insulation materials.

120V Electronic ballast.

7 1/2" height allows use in 2" x 8" joist construction.

Plaster Frame

Housing is secured to plaster frame with screws and can be removed for access to junction box.

Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

Junction Box

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation.

Supplied with three IDEAL® push-in wire connectors.

Installation

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation.

Bars can be repositioned 90° on plaster frame without tools.


Bars fit onto T-bar spine for quick alignment and can be permanently secured.

Score lines allow bars to be shortened without tools to accommodate a 12" joist span.


Project

Catalog

Type

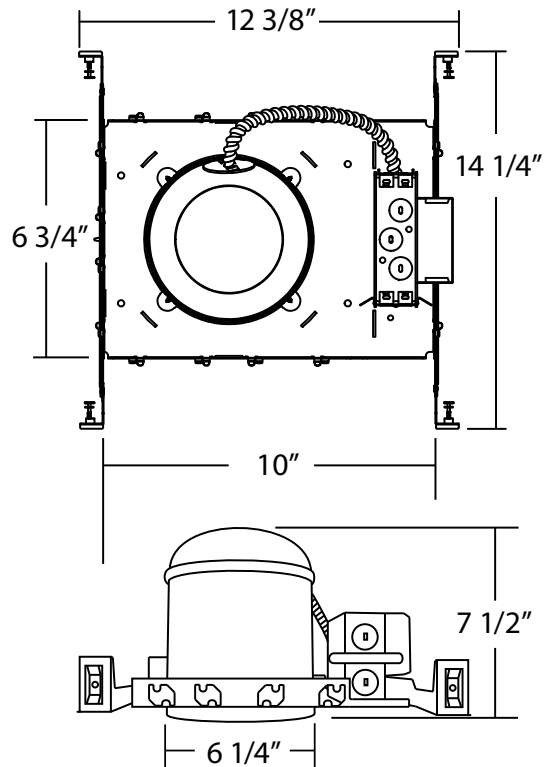



17017AEB26 | 6" Double Twin Fluorescent Compact Airtight Housing

Lexan Shower Fresnel Lens	Order No	Color	Maximum Lamp Rating
	17502BZ	Bronze (shown)	OD: 8" Wet Location Rated
	17502R	White (with reflector)	
	17502OB	Oil-Rubbed Bronze	
	17502	White (with metal trim ring)	
	17572WH	White (with plastic trim ring)	


Lexan Shower Albalite Lens	Order No	Color	Maximum Lamp Rating
	17505BZ	Bronze	OD: 8" Wet Location Rated
	17505NK	Nickel	
	17505R	White (with reflector)	
	17502OB	Oil-Rubbed Bronze	
	17505	White (shown with metal trim ring)	
	17505WH	White (with plastic trim ring)	


Lexan Drop Opal	Order No	Color	Maximum Lamp Rating
	17509R	White (with reflector)	OD: 8" Wet Location Rated
	17509	White (shown with metal trim ring)	
	17509WH	White (with plastic trim ring)	


Specular Reflector	Order No	Color	Maximum Lamp Rating
	17518CL	Clear (shown)	OD: 7"
	17518WH	White	


Reflector Baffle	Order No	Color	Maximum Lamp Rating
	17520CL	Clear (Black Baffle)	OD: 7 1/4"
	17520CLWH	Clear (White Baffle)	
	17520GD	Gold (shown with Black Baffle)	


17017AEB26 | 6" Double Twin Fluorescent Compact Airtight Housing

Baffle Fresnel Lens	Order No	Color	Maximum Lamp Rating
	17522BK	Black	OD: 7"
	17522WH	White (shown)	

Baffle Albalite Lens	Order No	Color	Maximum Lamp Rating
	17523BK	Black (shown)	OD: 7"
	17523WH	White	

Baffle Drop Opal	Order No	Color	Maximum Lamp Rating
	17524BK	Black (shown)	OD: 7 1/4"
	17524WH	White	

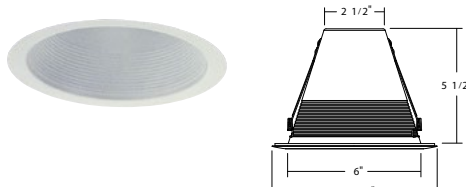

Baffle Cone	Order No	Color	Maximum Lamp Rating
	17525BK	Black	OD: 7 1/2"
	17525BZ	Bronze	
	17525NK	Nickel	
	17525OB	Oil-Rubbed Bronze	
	17525WH	White (shown)	

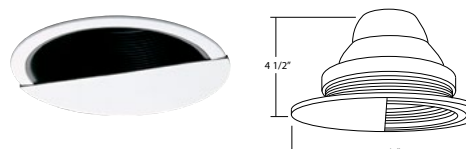Wall Wash Baffle	Order No	Color	Maximum Lamp Rating
	17537BK	Black (shown)	OD: 7 1/4"
	17537WH	White	

Wall Wash Reflector	Order No	Color	Maximum Lamp Rating
	17540BK	Black	OD: 7 1/4"
	17540CL	Clear (shown)	
	17540GD	Gold	
	17540WH	White	

17017AEB26 | 6" Double Twin Fluorescent Compact Airtight Housing

Ribbed Reflector	Order No	Color	Maximum Lamp Rating
 	17554	Gold	OD: 7 1/4"

Ribbed Reflector	Order No	Color	Maximum Lamp Rating
 	17555	Clear	OD: 7 1/4"