

*Project* *Comments*

*Catalog #* *Prepared By*

*Type* *Date*




## DESCRIPTION

- Suitable for new construction in commercial applications where uniform light distribution is required.
- NON-IC. Insulation must be kept a minimum of 3" from housing.

## FRAME-IN

- Designed for vertically mounted compact fluorescent lamp.
- 120-277V Universal input electronic ballast.
- Ballast includes integral thermal protector for over-lamping.
- Lamp type: 1X26W, 32W, 42W 4-pin quad/triple. G24Q (not included).
- Universal mounting bracket accepts #17203 flat bar hanger, #17208 C-channel bar and 1/2" EMT.

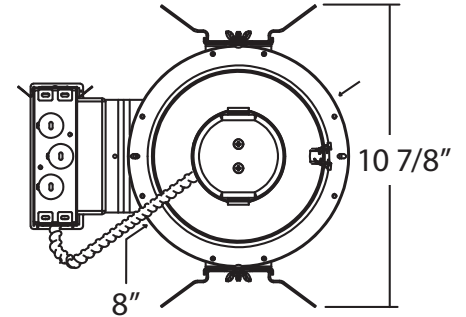


## JUNCTION BOX

- Listed for through branch circuit wiring and includes several 3/4" knockouts for commercial wiring.
- Supplied with three IDEAL® push-in wire connectors.

## SOCKET CUP

- Die-cast socket cap dissipates heat for improved lamp life and performance.
- Socket yoke allows vertical adjustment of socket cup for optimum light distribution and output.

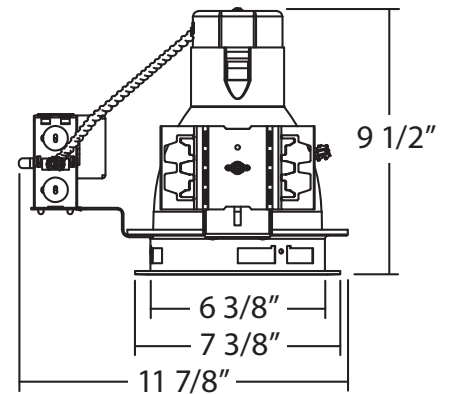

## HANGER BAR BRACKET

- Universal brackets accept C-channel or flat bar hangers (ordered separately); alternately, use rigid 1/2" steel conduit for tie-down to ceiling grids.

## EMERGENCY OPTION

- NICOR emergency ballast 650L4FEB provides 650 Lumen for minimum 90 minutes in the event of a power failure.

## LISTINGS


- UL damp location
- UL feed-through
- CUL



	<b>Order No</b>	<b>Description</b>	<b>Maximum Lamp Rating</b>	
		<b>Reflector</b>	OD: 7&3/8"	
	17610BK	Black		
	17610CL	Clear (shown)		
	17610GD	Gold		
	17610WH	White		
	<b>Order No</b>	<b>Description</b>	<b>Maximum Lamp Rating</b>	
		<b>Baffle   Reflector</b>	OD: 7&1/2"	
	17611BK	Black (shown)		
	17611WH	White		
	<b>Order No</b>	<b>Description</b>	<b>Maximum Lamp Rating</b>	
		<b>Reflector with Clear Lens</b>	OD: 7&3/8"	
	17612CL	Clear (shown)		
	17612WH	White		
	<b>Order No</b>	<b>Description</b>	<b>Maximum Lamp Rating</b>	
		<b>Wall Wash</b>	OD: 7&3/8"	
	17629CL	Clear		
	17629GD	Gold (shown)		
	<b>Order No</b>	<b>Description</b>	<b>Maximum Lamp Rating</b>	
		<b>Reflector with Lifted Glass</b>	OD: 7&3/8"	
	17630BK	Black		
	17630WH	White (shown)		
	<b>Order No</b>	<b>Description</b>	<b>Maximum Lamp Rating</b>	
		<b>Reflector with Louver</b>	OD: 7&3/8"	
	17635CL	Clear (shown)		
	17635GD	Gold		



Order No	Description	Maximum Lamp Rating
17663BK	<b>Baffle   Fresnel Lens</b> Black	OD: 7&1/2"
17663WH	White	

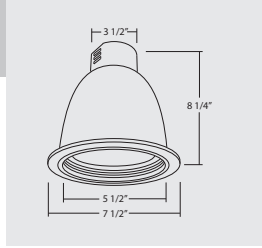

Order No	Description	Maximum Lamp Rating
17665BK	<b>Baffle Wall Wash</b> Black (shown)	OD: 7&1/4"
17665WH	White	

