

High-Performance Lighting Technology

Quick-Reference Guide

DOWNLIGHTS



RECESSED

PERFORMANCE

CCT

SPECS

DCG Select
LED RECESSED
GIMBAL DOWNLIGHT



	Lm	W	Lm/W
4"	731	7	99
6"	938	9	99



FINISH
Black, White

CRI
90+

TILT
0° - 30°



DCR Select
LED RECESSED
DOWNLIGHT



	Lm	W	Lm/W
4"	729	7.2	101
5/6"	923	9.2	100



FINISH
Smooth, Baffle

CRI
95



DEB56
LED RECESSED
EYEBALL DOWNLIGHT



	Lm	W	Lm/W
5/6"	971	13	78



FINISH
White

CRI
90+

TILT
0° - 30°



DLG
LED RECESSED
GIMBAL DOWNLIGHT




	Lm	W	Lm/W
2"	678	9	79
4"	612	9	67
5/6"	1034	13	83



FINISH
Black, White, Oil-Rubbed
Bronze

TILT
0° - 35°

HOUSING
New Construction,
Remodel, ICAT



DLR3 Select
LED RECESSED
DOWNLIGHT



	Lm	W	Lm/W
3"	811	7.5	108



FINISH
Baffle

TRIM
White

CRI
95



DLR4-R
4" RETRACTABLE
LED DOWNLIGHT



	Lm	W	Lm/W
4" Round	600	8.5	70.6



FINISH
White



DLRv6
LED RECESSED
DOWNLIGHT




	Lm	W	Lm/W
4" 700lm	735	8	93
5/6" 900lm	934	10	91
5/6" 1200lm	1231	14	89



FINISH
Smooth, Baffle

TRIM
Black, Black Baffle,
Bronze, Nickel

FRAME
New Construction



DLRv6P
LED RECESSED
DOWNLIGHT



	Lm	W	Lm/W
5/6" 900lm	923	9.2	100



FINISH
White, White Baffle,
Black, Black Baffle

FRAME
New Construction



RECESSED

PERFORMANCE

CCT

SPECS

DLRv7
LED RECESSED
DOWNLIGHT




	Lm	W	Lm/W
4" 900lm	764	6.5	117.9
5/6" 1500lm	1264	11.6	108.7



FINISH
Smooth, Baffle

TRIM
Black, Black Baffle, Bronze,
Nickel, Nickel Baffle

FRAME
New Construction



DQR/DLQ
SQUARE LED
RECESSED DOWNLIGHT




	Lm	W	Lm/W
3"	552	9	62
4"	681	11	60
5"	1039	16	66
6"	1050	16	68



FINISH
Baffle

TRIM
Black*, White

CRI
90



DQR2
SQUARE LED
RECESSED DOWNLIGHT




	Lm	W	Lm/W
2"	628	9	71



FINISH
Black, White, Nickel,
Oil-Rubbed Bronze

HOUSING
New Construction,
Remodel, ICAT



DQR2-AA
SQUARE ADJUSTABLE
LED RECESSED
DOWNLIGHT




	Lm	W	Lm/W
2"	674	9	77



FINISH
Black, White, Nickel,
Oil-Rubbed Bronze

TILT
0° - 30°



DQR4MA Select
4" MULTI-ADJUSTABLE
LED RECESSED
DOWNLIGHT




	Lm	W	Lm/W
4"	772	8	101



FINISH
White

TILT
0° - 30°

CRI
90+



IXD
CONTRACTOR
LED RECESSED
DOWNLIGHT




	Lm	W	Lm/W
4"	788	10	81
5"/6"	933	12	80



FINISH
Black, White

SHAPE
Round

CRI
90



RCQ
SQUARE LED
RECESSED DOWNLIGHT



	Lm	W	Lm/W
4"	855	10	86
6"	1248	14	92



FINISH
White

CRI
95



RDN
LED RECESSED
DOWNLIGHT WITH
NIGHT LIGHT



	Lm	W	Lm/W
4"	756	7.4	102
5"/6"	975	9.4	103



FINISH
Black, Black Baffle,
White, White Baffle

NIGHT LIGHT
2000K

CRI
95+



SURFACE-MOUNT

PERFORMANCE

CCT

SPECS

DLFv5

SUREFIT
SURFACE-MOUNT
LED DOWNLIGHT




	Lm	W	Lm/W
8W	675	8	85
10W	787	10	85
12W	971	12	84



FINISH
White

SHAPE
Round, Square,
Wall Wash

TRIM
Black, Bronze



IXE

CONTRACTOR
EDGE-LIT LED WAFER



	Lm	W	Lm/W
4"	621	8	74
6"	1097	11	96




FINISH
White, Black*

SHAPE
Round

TRIM**
Black, Bronze, Nickel


CRI
80

* Black finish is 4" only
**4" offers Black and Oil-Rubbed Bronze; 6" offers all three



DSE Select

EDGE-LIT
SURFACE-MOUNT
LED DOWNLIGHT



RD	Lm	W	Lm/W
5"	627	10	60
8"	966	16	62
9"	1285	18	71
SQ	Lm	W	Lm/W
4"	629	11	59
6"	962	16	62
9"	1243	19	69




FINISH
White

SHAPE
Round, Square

TRIM*
Black, Bronze, Nickel

*Round Trims only



DSE 11/15

EDGE-LIT
SURFACE-MOUNT
LED DOWNLIGHT




	Lm	W	Lm/W
11"	1552	16	98
15"	2058	19	108



FINISH
White

SHAPE
Round

MOUNTING
Surface, Pendant



RCD

LOW PROFILE
SURFACE-MOUNT
LED DOWNLIGHT



	Lm	W	Lm/W
4"	630	10	63
6"	977	16	65



FINISH
White

CRI
90




RSD

SURFACE-MOUNT LED
DOWNLIGHT



	Lm	W	Lm/W
4"	649	11	61
6"	970	16	62
8"	1152	19	62



FINISH
White

CRI
93+



RSD Select

SURFACE-MOUNT LED
DOWNLIGHT




	Lm	W	Lm/W
4"	655	11	60
5/6"	999	15	65
8"	1264	19	68



FINISH
White*, Black,
Bronze, Nickel

CRI
90

*8" only available in White



SURFACE-MOUNT

PERFORMANCE

CCT

SPECS

RSDS-M

SURFACE-MOUNT
LED DOWNLIGHT
WITH PIR MOTION SENSOR




	Lm	W	Lm/W
4"	611	10	63



FINISH
White

SENSOR
65° PIR Sensor



RSDS-M2

SURFACE-MOUNT
LED DOWNLIGHT
WITH PIR MOTION SENSOR



	Lm	W	Lm/W
4"	785	10	79
6"	1140	14	83



FINISH
White

SENSOR
65° PIR Sensor



CANLESS

PERFORMANCE

CCT

SPECS

CLRv3 Select

COMMERCIAL LED
RECESSED DOWNLIGHT



	Lm	W	Lm/W
4"	1137	10	115
6"	1654	18	95
8"	2988	29	102



FINISH
White

TRIM
Black



CLRv3 Select
Low Lumen

COMMERCIAL LED
RECESSED DOWNLIGHT



	Lm	W	Lm/W
4"	686	8	87
6"	798	9	90
8"	1525	15.5	98



FINISH
White

TRIM
Black



DGC Select

LED RECESSED GIMBAL
DOWNLIGHT




	Lm	W	Lm/W
4"	763	9	87



FINISH
White, Bronze, Black

TILT
0° - 25°



DGD Select

GIMBAL RECESSED
LED DOWNLIGHT




	Lm	W	Lm/W
2"	461	5	97
3"	606	8	77
4"	845	11	75



FINISH
White, Black, Bronze

CRI
90 +

TILT
0° - 32°



DGF Select

LED RECESSED FLOATING
GIMBAL DOWNLIGHT




	Lm	W	Lm/W
4"	766	9	87



FINISH
White, Bronze, Black

TILT
0° - 90°



CANLESS

PERFORMANCE

CCT

SPECS

RRD
2" RECESSED LED
DOWNLIGHT




	Lm	W	Lm/W
8W	726	8	96
14W	1202	13	94



STYLES
Trim, Trimless

SHAPE
Round, Square

TRIM
Black, White



REL
EDGE-LIT LED
DOWNLIGHT




	Lm	W	Lm/W
4"	680	10	66
6"	921	12	78
8"	1306	18	73



FINISH
White

SHAPE
Round

TRIM
Black, Bronze, Nickel



REL Select
EDGE-LIT RECESSED LED
SELECTABLE DOWNLIGHT



RD	Lm	W	Lm/W
3"	587	8	77
4"	710	11	67
6"	943	12	77
8"	1327	18	74


SQ	Lm	W	Lm/W
4"	658	11	62
6"	903	13	72



FINISH
Black, White

SHAPE
Round, Square

TRIM*
Black, Bronze, Nickel



*Round Trims only except 3"

RELS-R
EDGE-LIT RECESSED
LED SELECTABLE
DOWNLIGHT




RD	Lm	W	Lm/W
4"	710	11	67
6"	943	12	77

SQ	Lm	W	Lm/W
4"	658	11	62
6"	903	13	72



FINISH
Baffled White

SHAPE
Round, Square



REL-FR
FIRE-RATED EDGE-LIT
LED DOWNLIGHT



	Lm	W	Lm/W
4"	957	11	88
6"	1281	15	88



FINISH
White

CRI
90

RATING
2 Hours Fire Rated



REL6-UNV
EDGE-LIT RECESSED
LED SELECTABLE
DOWNLIGHT
UNIVERSAL VOLTAGE




	Lm	W	Lm/W
6"	1102	13	88



FINISH
Smooth, Baffle

VOLTAGE
120-277V (UNV)



RMP
3" LED MONOPOINT



	Lm	W	Lm/W
3"	1037	11.7	88.6



FINISH
Black, White

TILT & ROTATION
355° Rotation & 180° Tilt

CRI
90




SYSTEMS

PERFORMANCE

CCT

SPECS

DLQ5
NEW CONSTRUCTION
LED DOWNLIGHT
SQUARE

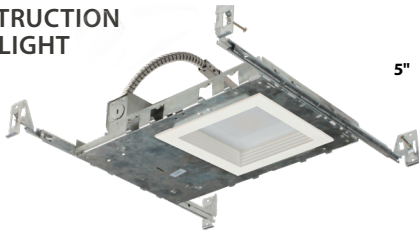

	Lm	W	Lm/W
5"	1189	16	75



FINISH
White

CRI
90

FRAME
New Construction



DLQ5-MA
NEW CONSTRUCTION LED
DOWNLIGHT
SQUARE ADJUSTABLE




	Lm	W	Lm/W
5"	1070	16	67



FINISH
White

TILT
0° - 83°

FRAME
New Construction




DDA
3" SPECIFICATION GRADE
DOWNLIGHT SYSTEM



	Lm	W	Lm/W
ADJUSTABLE	1776	21	85
REMODEL	1776	21	85

Based on Wide optic, 3000K CCT



HOUSING
Adjustable, Remodel,
New Construction

FINISH
Smooth, Baffle

TRIM
White, Black, Specular

SHAPE
Round, Square, WW

LOCATION
Wet/Damp Location

CRI
80, 90

OPTICS
Beam Patterns



CDG
MODULAR LED DOWNLIGHT



	Lm	W	Lm/W
4"	2165	24	90
6"	2323	24	96

Based on 36° Medium optic, 3500K CCT, 25W



REFLECTOR
White, Haze, Specular


CRI
94

OPTICS
Medium-Narrow, Medium,
Wall Wash

APPLICATION
New Construction,
Remodel

EMERGENCY
4W, 8W

SENSOR
NLC

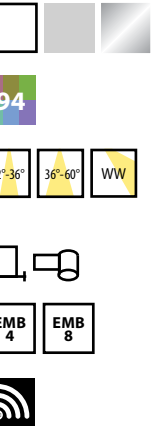

All performance data are based on 3000K CCT, Medium Wattage (if selectable).
For the most up-to-date information, see product spec-sheets available online.

SPECIALTY

DOOR CHIME KITS

PERFORMANCE VOLTAGE

SPECS

EDC
SINGLE-GANG
ELECTRONIC
DOOR CHIME



2W

5 VDC

FINISH
White



BUTTON STYLE
Standard (Lighted),
Round Stucco (SB)



BUTTON FINISH
Stucco Button - Nickel, Bronze



PrimeChime²
ELECTRONIC DOOR CHIME
VIDEO COMPATIBLE



20W


20 VAC



FINISH
White



BUTTON STYLE
Standard (Lighted),
Rectangular Deco (DB),
Round Stucco (SB)



BUTTON FINISH
Deco Button: White, Black, Copper,
Nickel



Stucco Button: White, Polished
Brass, Brushed Nickel, Antique
Brass, Architectural Bronze



ACCESSORY

PRCP2STROBE
PRCP2EBADAPT1WH
PRCHIMEADAPT1WH



PRMC/PRMC-WL
PRIMECHIME PLUS 2 MINI®
VIDEO COMPATIBLE



21W

24 VAC



FINISH
White



BUTTON STYLE
Standard (Lighted),
Rectangular Deco (DB),
Round Stucco (SB)
* Wireless



BUTTON FINISH
Deco Button: White, Black,
Copper, Nickel



Stucco Button: White, Polished
Brass, Brushed Nickel, Antique
Brass, Architectural Bronze



ACCESSORY

* PRCHIMEADAPT1WH Available



* Ring adapter PRCHIMEADAPT1WH only available for PRMC

STEP LIGHTS

PERFORMANCE

CCT

SPECS

STP2
LED STEP LIGHT



	Lm	W
Louvered	27	1
Louvered (PC)	27	1.5
Open Face	57	1
Open Face (PC)	57	1.5

27K

FINISH
White, Black, Oil-Rubbed Bronze



TRIM
Louvered, Frosted



SENSOR
Photocell (PC), None



LOCATION
Wet Location



STW
WET LOCATION
LED STEP LIGHT



	Lm	W
Vertical	35	3
Horizontal	75	5

30K

FINISH
White, Black, Bronze



SHAPE
Vertical, Horizontal



LOCATION
Wet Location



UNDER CABINETS

PERFORMANCE

CCT

SPECS

NUC Select v5
LED UNDER CABINET



	Lm	W	Lm/W
8"	276	4	76
12"	426	5	81
21"	706	9	82
30"	810	11	73
40"	1159	16	75

Based on 3000K CCT



FINISH
White, Black, Bronze, Nickel



SIZES
8", 12", 21", 30", 40"



CRI
92+



UCB Select
LED UNDER CABINET



	Lm	W	Lm/W
9"	345	5	69
12"	345	5	69
18"	621	9	69
21"	621	9	69
24"	621	9	69
33"	966	14	69
42"	1242	18	69

Based on 3000K CCT



FINISH
White



SIZES
9", 12", 18", 21", 24", 33", 42"



SWITCH
With Switch, Without Switch



CRI
90+



Ask about our UCB Counter Display

ARCHITECTURAL LINEARS

LINEARS & WRAPS

PERFORMANCE

CCT

SPECS

LSA
ARCHITECTURAL LED
DIRECT/INDIRECT LINEAR



	Lm	W	Lm/W		
4'	3,200-10,800	23-73	>140	30K	
6'	3,400-9,221	23-56	>150+	35K	
8'	6,000-12,780	43-85	>140+	40K	
				50K	

FINISH
White, Silver, Black, Custom*

DRIVER
Integral (0-10V) and DALI Control

DISTRIBUTION
10 Up/90 Down


MOUNTING
Pendant, Surface Mount, Aircraft Cable

SENSOR
DALI2 PIR, Microwave, N-Light, and PIR.

EMER
EMS8, None

*Special order available with MOQ order only

LSE
ARCHITECTURAL LED
DIRECT/INDIRECT LINEAR



	Lm	W	Lm/W		
4'	3,000-6,850	23-49	>130	35K	
8'	6,000-10,900	46-80	>130	40K	
				50K	

FINISH
White, Silver, Custom*

DRIVER
Integral (0-10V) and DALI Control

DISTRIBUTION
10 Up/90 Down
20 Up/80 Down
50 Up/50 Down
80 Up/20 Down
100 Down

MOUNTING
Pendant, Wall Mount, Aircraft Cable, Continuous Run

SENSOR
DALI2 PIR, Microwave, N-Light, and PIR.

EMER
EMS8, None

*Special order available with MOQ order only

LSQ
ARCHITECTURAL LED
DIRECT LINEAR



	Lm	W	Lm/W		
4'S	4021	26	155	35K	
4'H	6603	51	129	40K	
8'	6603	51	129	50K	

Based on 4000K CCT

FINISH
White, Black, Silver, and Custom*

DRIVER
Integral (0-10V) and DALI Control

MOUNTING
Recessed, Pendant, Surface Mount, Wall Mount, and Aircraft Cable

SENSOR
DALI2 PIR, Microwave, N-Light, and PIR.

EMER
EMS8, None

*Special order available with MOQ order only

PERFORMANCE

CCT

SPECS

LLR
LAMP READY STRIP



VOLTAGE
120-277 VAC

LAMP TYPE
T8 Type B

MAX W
22W per Lamp

FINISH
White

MOUNTING
Surface

Lamps not included

LSC2 Select
SELECTABLE CCT &
OUTPUT LED LINEAR STRIP



	Lm	W	Lm/W
2'	2795	20	144
4'	4135	29	142
8'	9684	68	143



FINISH
White

MOUNTING
Surface, Cable, Hook and Chain

SENSOR
Microwave, and NLC Microwave

LSC28F
SELECTABLE CCT & OUTPUT
LED FOLDABLE LINEAR STRIP




	Lm	W	Lm/W
8'	92726	66	146

FINISH
White

MOUNTING
Surface, Cable, Hook and Chain

SENSOR
MW, NLC, None

LSL1-NP
TUNABLE LED LINEAR
STRIP LIGHT



	Lm	W	Lm/W
2'	2687	20	132
4'	5637	39	146
8'	11125	75	149





WRAPAROUNDS

PERFORMANCE

CCT

SPECS

WLR
LAMP-READY WRAP



VOLTAGE | 120-277 VAC
LAMP TYPE | T8 Type B
MAX W | 22W per Lamp

FINISH
White
MOUNTING
Surface
Lamps not included

WPC4
LED LINEAR WRAP




	Lm	W	Lm/W
2'	2634	20	134
4'	4891	37	132



FINISH
White
CRI
80

WPP
LED PRISMATIC WRAP



	Lm	W	Lm/W
4'	5256	31.7	165.8



FINISH
White
CRI
80+
LENS
Prismatic
SENSOR
None, Microwave, and NLC Microwave

UTILITY

PERFORMANCE

CCT

SPECS

UWL
360° TEMPORARY
LED WORK LIGHT



	Lm	W	Lm/W
100	12000	100	120
150	18000	150	120

50K

FINISH
Orange
SAFETY CAGE
White
VOLTAGES
120-277V
MOUNTING
Floor Stand, Folding Hook, Units Linkable up to 800W

USL
LED STRING LIGHT



	Lm	W	Lm/W
	15295	127	120.4

50K

FINISH
Yellow
CRI
80+
MOUNTING
Snap-lock carabiner at each head. Linkable up to 3 units for 300ft run

VAPORTITES



PERFORMANCE

CCT

SPECS

VT3-20
LED VAPORTITE



	Lm	W	Lm/W
2S	2606	20	130
8H	11637	90	130

40K
50K

FINISH
Light Gray
MOUNTING
Surface Mount
Cable Suspension
EMERGENCY*
8W and 16W

**Available on 8ft fixture only*

VT4
LED VAPORTITE



	Lm	W	Lm/W
4'	6623	45	149



FINISH
Light Gray
MOUNTING
Surface Mount
Cable Suspension
SENSOR
None, Microwave, and NLC Microwave
EMERGENCY
8W and 18W

VT5
LED VAPORTITE



	Lm	W	Lm/W
2'	3211	21.3	150
4'	6340	40.5	156
8'	10556	66.0	160



FINISH
Light Gray
MOUNTING
Surface Mount
Cable Suspension
SENSOR
Internal MW, External MW/PIR, NLC SENSORMWBT1KI (Available)
EMERGENCY
*4W, **8W, ***18W
** Available on 2ft fixture only
** Available on 4ft fixture only
*** Available on 8ft fixture only*

VTJ
LED JELLY JAR



	Lm	W	Lm/W
	2585	20.6	125.7



FINISH
Gray
MOUNTING
Surface mount with adjustable arm

TROFFERS & PANELS



PERFORMANCE

CCT

SPECS

TAC2 Select
ARCHITECTURAL LED TROFFER



	Lm	W	Lm/W
1' x 4'	3546	25	142
2' x 4'	5047	37	137



FINISH
White



SIZE
1'x4' & 2'x4'




MOUNTING
Surface Mount Kit,
Drywall Flange Kit



SENSOR
NLC, None



EMERGENCY
4.5W, 8W



TAC3 Select
ARCHITECTURAL LED TROFFER



	Lm	W	Lm/W
2' x 2'	3883	27.7	140
2' x 4'	5256	37.8	139



FINISH
White



SIZE
2'x2' & 2'x4'



SENSOR
None




EMERGENCY
4.5W, 8W (MTO), 8W (QS)



MTO = Made to Order
QS = Quick Ship

TAC3S Select
SENSOR READY
ARCHITECTURAL LED TROFFER



Sensor-Ready



	Lm	W	Lm/W
2' x 2'	2655	19	138
2' x 4'	5446	41	134



FINISH
White



SIZE
2'x2' & 2'x4'



SENSOR
NLC, None



EMERGENCY
4.5W, 8W (MTO), 8W (QS)




MTO = Made to Order
QS = Quick Ship

PERFORMANCE


CCT

SPECS

T7C
LED BACKLIT TROFFER



	Lm	W	Lm/W
1' x 4'	3590	27	131
2' x 2'	4525	35	131



FINISH
White



SIZE
1'x4' & 2'x2'




MOUNTING
Surface Mount Kit,
Drywall Flange Kit



SENSOR
NLC, None



EMERGENCY
4.5W, 8W



TAR Select v2
ARCHITECTURAL LED TROFFER
RETROFIT KIT



	Lm	W	Lm/W
1' x 4'	3664	25	144
2' x 2'	3694	25	146
2' x 4'	5790	38	151



FINISH
White




SIZE
1'x4', 2'x2' & 2'x4'




SENSOR
NLC, None



EMERGENCY
4.5W, 8W



TAR Select v3
SENSOR-READY ARCHITECTURAL
LED TROFFER RETROFIT KIT



(1' x 4' and 2' x 4')

	Lm	W	Lm/W
1'x4'	3215	20	163
2' x 2'	3063	20	156
2' x 4'	4347	28	155



FINISH
White



SIZE
1'x4', 2'x2' & 2'x4'




SENSOR
NLC, None



EMERGENCY
8W



TGL4 Select
LED BACKLIT TROFFER



	Lm	W	Lm/W
1' x 4'	5022	41	123
2' x 2'	3938	29	137
2' x 4'	4835	39	126



FINISH
White



SIZE
1'x4', 2'x2' & 2'x4'



MOUNTING
Surface Mount Kit,
Drywall Flange Kit




EMERGENCY
4.5W, 8W (MTO), 8W (QS)



MTO = Made to Order | QS = Quick Ship

TGL4S Select
SENSOR READY LED BACKLIT TROFFER



Sensor-Ready



	Lm	W	Lm/W
1' x 4'	3142	25	124
2' x 2'	3435	24	142
2' x 4'	5157	38	135



FINISH
White



SIZE
1'x4', 2'x2' & 2'x4'



SENSOR
Ready



EMERGENCY
4.5W, 8W (MTO), 8W (QS)



MTO = Made to Order | QS = Quick Ship

HIGH/LOW BAYS

PERFORMANCE

CCT


SPECS

HBC4

LED UFO LOW/HIGH BAY



	Lm	W	Lm/W
100W	14945	102	147
240W	34446	241	143
400W	53747	392	137



FINISH

White, Black



CRI

80+



SENSOR

PIR, MW, NLC, None



MOUNTING

Pendant, Yoke Mount, Hook & Bolt



VOLTAGES

120-277V (UNV), 277-480V (HV)



ACCESSORY

Glare Shield, Wireguard, Reflectors



EMERGENCY

EMB4002UNVBK**



** Not available on 400W or High-Voltage models

HBC5

DOUBLE SELECT LED UFO LOW/HIGH BAY



	Lm	W	Lm/W
150S	17366	120	145
240S	32054	220	146
300S	40509	270	150



FINISH

White, Black



CRI

80+



SENSOR

PIR, MW, NLC, None



MOUNTING

Pendant, Yoke Mount, Hook & Bolt



VOLTAGES

120-277V (UNV), 277-480V (HV)



ACCESSORY

Glare Shield, Wireguard, Reflectors



EMERGENCY

EMB4002UNVBK**



** Not available on 400W or High-Voltage models

HBC6

TRIPLE SELECT LED UFO LOW/HIGH BAY



	Lm	W	Lm/W
150S	18217	108	170
240S	35470	204	174

Based on 80° Beam Angle




FINISH

White, Black



OPTICS

60°, 80°, 100°



SENSOR

PIR, MW, NLC, None



MOUNTING

Pendant, Yoke Mount, Hook & Bolt



VOLTAGES

120-277V



ACCESSORY

Glare Shield, Wireguard, Reflectors



EMERGENCY

EMB4002UNVBK



PERFORMANCE

CCT


SPECS

HBL4

LED LINEAR LOW BAY/HIGH BAY



	Lm	W	Lm/W
105W	14780	106	140
155W	21460	155	139
210W	27302	205	133
300W	41178	305	135



SENSOR

PIR, MW, NLC, None



VOLTAGE

120-277V (UNV), 347-480V (HV)



MOUNTING

Pendant, Surface Mount, Aircraft Cables, Hook & Chain



EMERGENCY

25W



HBN

NSF RATED LED HIGH-BAY



	Lm	W	Lm/W
150S	21859	126	174
300S	45026	259	174



SENSOR

PIR, MW, NLC, None



MOUNTING

Pre-installed Mounting Rings and Surface Mount



EMERGENCY

Standard: 16W, 25W Cold Weather: 15W, 20W




HML1

LED HIGH-PERFORMANCE HIGH BAY



	Lm	W	Lm/W
100W	14200	101	141
130W	18138	129	141
150W	20574	147	140
210W	29258	209	140
300W	42055	305	137
450W	66516	459	144




Based on Standard Distribution

Note: Emergency not available on HV (277-480V) fixtures


MOUNTING

Pendant, Surface Mount, Aircraft Cable, Hook & Chain



LENS

General (A), Wide (B), Aisle (C)



SENSOR

PIR, MW, NLC, None




VOLTAGE

120-277V (UNV), 277-480V (HV)



EMERGENCY

8W, 18W, 25W, 40W



HML3

LED HIGH-PERFORMANCE HIGH BAY



	Lm	W	Lm/W
150S	17263	120	144
320S	39432	270	146



Based on Standard Distribution

Note: Emergency not available on HV (277-480V) fixtures


SENSOR

PIR, MW, NLC, None




MOUNTING

Pendant, Surface Mount, Aircraft Cable, Hook & Chain



LENS

General (A), Wide (B), Aisle (C)



VOLTAGE

120-277V (UNV), 277-480V (HV)



EMERGENCY

18W, 40W (MTO) 18W, 40W (QS)



MTO = Made to Order | QS = Quick Ship

HML4

LED TRIPLE SELECT HIGH BAY



	Lm	W	Lm/W
160S	17933	115	156
240S	30291	192	158
320S	42289	268	158



Based on 90°x90° Distribution


SENSOR

PIR, MW, NLC, None



MOUNTING

Pendant, Surface Mount, Aircraft Cable, Hook & Chain



OPTICS

90°x90°, 65°x95°, 45°x100°




VOLTAGE

120-347V (UNV)



EMERGENCY

18W, 40W



EMERGENCY



EMERGENCY LIGHTS

PERFORMANCE

SPECS

EML1
LED EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	188	1.15	90min

FINISH
White




REMOTE HEADS
ERH 1|2, ERHWP 1|2



VERSIONS
Standard, Remote Capable



EML2
LED COMPACT EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	162	2.4	90min

FINISH
White



EML3
LED EMERGENCY LIGHT




VAC	Lm	W	EM
120/277	203	2.1/2.5*	90min

*Std / SD


FINISH
White, Black



REMOTE HEADS
ERH 1|2 (WP)
ERH 3|4 (WP)



VERSIONS
Standard, Remote Capable,
Self Diagnostic Remote
Capable



EML4
LED COMPACT EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	272	2.1	90min

FINISH
White



EML5
LED MICRO EMERGENCY LIGHT




VAC	Lm	W	EM
120/277	151	1	90min

FINISH
White



VERSIONS
Standard, Remote Capable



EML6
OUTDOOR LED EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	265	2.4	90min

FINISH
White



EML7
LED HIGH-OUTPUT EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	700	3.5	90min

FINISH
White



EML8
LED HIGH-OUTPUT EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	1200	3.3-4.5	90min

FINISH
White



REMOTE HEADS

PERFORMANCE

SPECS

ERH1|2
LED EMERGENCY
LIGHT REMOTE HEAD



	VDC	Lm	W
ERH1	3.6	113.4	1.2
ERH2	3.6	226.8	2.4

FINISH
White



VERSIONS
Standard, Self-Diagnostic



ERHWP1|2
LED EMERGENCY LIGHT
WEATHER RESISTANT
REMOTE HEADS



	VDC	Lm	W
ERHWP1	3.6	128.3	1.3
ERHWP2	3.6	256.6	2.6

FINISH
Gray



VERSIONS
Standard, Self-Diagnostic



EXIT/EMERGENCY COMBOS

PERFORMANCE

SPECS

ECL1 Select
LED EMERGENCY
EXIT SIGN COMBO



VAC	Lm	W	EM
120/277	193	3.5/4.0*	90min

*Std / Remote

FINISH
White, Black



LETTER
Selectable: Green, Red



FACES
1 Side, 2 Sides



REMOTE HEADS
ECL*RH, ECL*RHWH



ECL2
SLIM LED EXIT
SIGN COMBO



VAC	Lm	W	EM
120/277	160	3.3	90min

LETTER
Green, Red



FACES
1 Side, 2 Sides



ECL3
SELF-DIAGNOSTIC LED
EXIT SIGN COMBO



VAC	Lm	W	EM
120/277	203	3.3	90min

LETTER
Green, Red



FACES
1 Side, 2 Sides



REMOTE HEADS
ERH*SD, ERH*WPSD



ECL5
LED OUTDOOR
EMERGENCY EXIT
SIGN COMBO



VAC	Lm	W	EM
120/277	213	2.9/3.8	90min

LETTER
Green, Red



FACES
1 Side, 2 Sides



EXIT SIGNS

PERFORMANCE

SPECS

EXL1
LED EMERGENCY
EXIT SIGN



VAC	W	EM
120/277	3.8	90min

FINISH
White



LETTER
Green



EXL1-Select
LED EMERGENCY
EXIT SIGN



VAC	W	EM
120/277	1.0	90min


FINISH
White, Black



LETTER
Selectable: Green, Red



VERSIONS
Standard, Self-Diagnostic



EXIT SIGNS

PERFORMANCE

SPECS

EXL2-10
LED EDGE-LIT EXIT SIGN



VAC	W	EM
120/277	2.3	90min


FINISH
Aluminum



LETTER
Green, Red



FACES
1 Side, 2 Sides*



VERSIONS
Standard, Self Diagnostic,
AC-Voltage (Non-EM)



*Available on Mirrored models only

EXL23
LED EDGE-LIT EXIT SIGN



VAC	W	EM
120-277	2	90min




FINISH
Clear, Mirrored



LETTER
Selectable Green, Red



FACES
1 Side, 2 Sides*



FACES
1 Side, 2 Sides*

*Available on Mirrored models only (simply remove pre-applied mirror sheet))

EXL4
SLIM LED EXIT SIGN




VAC	W	EM
120/277	1.6	90min

LETTER
Green, Red



FACES
1 Side, 2 Sides



EXL5
WET LOCATION LED EXIT SIGN



	VAC	W	EM
RD	120/277	2.9/3.6	90min
GR	120/277	2.74/3.5	90min


FINISH
White



LETTER
Green, Red



FACES
1 Side, 2 Sides



EXL6
SELF-DIAGNOSTIC
CAST-ALUMINUM EXIT SIGN




VAC	W	EM
120/277	5	90min

FINISH
White/White Frame
White/Aluminum Frame
Aluminum/Black Frame



FACES
1 Side, 2 Sides



LETTER
Green, Red



EMERGENCY PACKS


PERFORMANCE

EMA

CONSTANT POWER
EMERGENCY PACK
(4W/25W/40W)



EMA041UNV



EMA251WRV



EMA401WRV

	OUTPUT (VDC)	OUTPUT (W)	WEIGHT (LBS)
EMA041UNV	10-60	4	0.39
EMA251WRV	170	25	2.65
EMA401WRV	170	40	2.65

EMB

EMERGENCY PACK



EMB45



EMB80



EMB4002



EMB4002REMOTE

	OUTPUT (VDC)	OUTPUT (W)	WEIGHT (LBS)
EMB45	3-60	4.5	2.4
EMB80	3-60	8.5	3.1
EMB4002	130-190	40	8.8

EMI

EMERGENCY
INVERTER PACK



EMI200

	OUTPUT (VAC)	OUTPUT (W)	WEIGHT (LBS)
EMI200	120	20	7.2

EMSM

SURFACE MOUNT
FIXTURE EMERGENCY
BATTERY



Test button/Indicator light



Peel & stick to fixture/surface

	OUTPUT (VAC)	OUTPUT (W)	WEIGHT (LBS)
EMSMN13	120	13	2.36

OUTDOOR

PERFORMANCE

SPECS

EMO

OUTDOOR
EMERGENCY
BACKUP
ENCLOSURE KIT



OUTPUT (VDC)	WATTAGE (W)	WEIGHT (LBS)
170	8 or 18	1.54

FINISH
Bronze, White



EOF

LED EMERGENCY
OUTDOOR FULL CUTOFF



Lm	W	Lm/W		
1554	17	92	30K	50K

Based on 3000K CCT

FINISH
White, Black*, Bronze, Silver*



CRI
70+



VERSIONS
Standard, Self-Diagnostic,
Cold Weather, AC-Voltage
(Non-EM)



*May be subject to minimum order quantity (MOQ).
Please check factory for additional lead times.

EOT


LED EMERGENCY
OUTDOOR TEAR DROP



Lm	W	Lm/W		
1074	13	80	27K	50K

Based on 2000K CCT

FINISH
Bronze, Silver



CRI
80+



VERSIONS
Standard, Self-Diagnostic,
Cold Weather, AC-Voltage
(None-EM)



EOT2

LED EMERGENCY
OUTDOOR TEAR DROP



Lm	W	Lm/W
1815	13	137

Based on 4000K CCT



FINISH
Bronze



CRI
80+



VERSIONS
Standard, Cold Weather,
AC-Voltage (Non-EM)



HAZARDOUS LOCATION

OUTDOOR

PERFORMANCE

CCT

SPECS

XPL
LED LINEAR LUMINARE



1A	Lm	W	Lm/W
40W	4213	38	111
80W	8723	81	108

1B	Lm	W	Lm/W
40W	5267	41	129
80W	10994	80	137

Based on 4000K CCT

- 30K*
- 40K*
- 50K

*Consult for lead time.
Non-EM models only.

FINISH
Gray



CLASS 1A

C1D1 | Group: C, D
C1D2 | Group: A, B, C, D

CLASS 1B

C1D2 | Group: A, B, C, D
C2D1 | Group: E, F, G
C3 |

EMERGENCY

XPL1A080U50GR
XPL1B040U50GR
XPL1B080U50GR

See spec. sheet for more details.

XPR
LED AREA LIGHT



	Lm	W	Lm/W
45W	6426	42	152
65W	9416	65	145

Based on 4000K CCT

- 30K*
- 40K*
- 50K

*Consult for lead time

FINISH
Gray



CLASS 1B

C1D2 | Group: A, B, C, D
C2D1 | Group: E, F, G
C2D2 | Group: F, G

XPQ
LED FLOOD LIGHT
HIGH BAY



1A	Lm	W	Lm/W
80W	9055	74	123
100W	11927	98	122
150W	16916	140	121

1B	Lm	W	Lm/W
80W	9055	74	123
100W	11927	98	122
150W	16916	140	121

Based on 4000K CCT

- 30K*
- 40K*
- 50K

*Consult for lead time

FINISH
Gray



CLASS 1A

C1D1 | Group: C, D
C1D2 | Group: A, B, C, D
C2D2 | Group: F, G

CLASS 1B

C1D2 | Group: A, B, C, D
C2D2 | Group: F, G

AREA LIGHTS

PERFORMANCE

CCT

SPECS

OAL3
LED AREA LIGHT



	Lm	W	Lm/W
150S	16643	120	139
200W*	27397	201	136
300S	33967	249	137


Based on Type III Optic
*5000K and single wattage only



FINISH
Bronze, White



OPTICS
Type II, Type III, Type IV, Type V



SENSOR
3-Pin, 7-Pin, Motion Sensor



MOUNTING
Pole Arm, Wall Box, Slipfitter, Straight Arm, Trunnion



OAL4
LED AREA LIGHT



	Lm	W	Lm/W
150S	17991	116	156
300S	36144	229	158


Based on Type III, 4000K CCT, Medium Wattage



FINISH
Bronze, White, Black



OPTICS
A (Type III/IV/V)
B (Type II/III/IV)



SENSOR
3-Pin, 7-Pin, MW Sensor



MOUNTING
Pole Arm, Wall Box, Slipfitter, Straight Arm, Trunnion



OAL5
LED AREA LIGHT



	Lm	W	Lm/W
	8923	61	147

Based on Type III, 4000K CCT, Medium Wattage



FINISH
Bronze, Black



SENSOR
Motion Sensor Socket (12V)



OPTICS
Type II, Type III, Type IV, Type V



POLES


SPECS

SPECS

OPL
AREA LIGHT
POLES



FINISH
Bronze, White, Black



SHAPES
Round, Round Tapered, Square



DIAMETER
Round: 3" to 9"
Square: 3" to 9"



LENGTHS
All lengths available upon request



MATERIAL
Steel, Aluminum



MOUNT ACCESSORIES
Wall Bracket, Round Pole, Low Profile, Triple Tenon



Pre-drilled hole patterns available upon request.

OPL2
AREA LIGHT
POLES



FINISH
Bronze



SHAPES
Square



DIAMETER
4" square



LENGTHS
15', 20', 25'




MATERIAL
Steel



COMPATIBLE FIXTURE
OAL3, OAL4, OAL5, OFL4*



MOUNT ACCESSORIES
Tenon Adapter, Bullhorn Adapter, Wall Mount Bracket, Base Cover/ Pole Cap



* 150W and 320W models only. Requires a tenon adapter.
Pre-drilled hole patterns available upon request.

BARN LIGHTS

PERFORMANCE

CCT

SPECS

ODL4

LED DUSK
TO DAWN



	Lm	W	Lm/W
60S	6267	45	139
120S	11937	90	133



FINISH
Bronze, Gray



SENSOR
Photocell



BOLLARDS

PERFORMANCE

CCT

SPECS

OBH

LED BOLLARD



	Lm	W	Lm/W
	430	10	61



FINISH
Stone Gray, Gray Aluminum



OBL2

LED BOLLARD



	Lm	W	Lm/W
Louver	1368	17	76
Cone	2895	18	162



FINISH
Bronze



SENSOR
None



CANOPIES

PERFORMANCE

CCT

SPECS


OUC3

LED CANOPY



	Lm	W	Lm/W
45W	5412	42	130
80W*	9934	79	126


*Available in 4000K only



FINISH
Bronze



SENSOR
Photocell, Motion Sensor,
None



OUC4

LED CANOPY



	Lm	W	Lm/W
75S	7812	60	130
120S	12438	96	130



FINISH
Bronze, White



SENSOR
Photocell (Standard),
Motion Sensor



OUC5

LED CANOPY



	Lm	W	Lm/W
100S	15321	100	153



FINISH
Black, White



SENSOR
Photocell (Standard),
Motion Sensor



OUS

LED SPECIFICATION
CANOPY



	Lm	W	Lm/W
45W	5529	44	126



FINISH
Bronze



SENSOR
Photocell, None



CYLINDERS

PERFORMANCE

CCT

SPECS

OWC

LED WALL MOUNT
CYLINDER



	Lm	W	Lm/W
RD (Up/Down)	3355	34	100
SQ (DN)	2290	21	109



FINISH
Bronze, White



SHAPE
Round, Square



CONFIGURATION
Down, Up/Down



OWCR

LED WALL-MOUNT
CYLINDER



	Lm	W	Lm/W
4" (Up/Down)	834	9	96
4" (Down Only)	1654	17	96
6" (Up/Down)	1389	16	88
6" (Down Only)	2755	30	92

Based on 40° Optics



FINISH
Bronze



SENSOR
None



FLOOD LIGHTS

PERFORMANCE

CCT

SPECS

OFL2

LED FLOOD LIGHT



	Lm	W	Lm/W
12W	1238	12	106
30W	3071	29	106
50W	5363	51	106

Based on 3000K CCT



FINISH
Bronze



MOUNTING
Knuckle, Yoke*



*Available on 50W, 3000K only

OFL4

ROUND-BACK
LED FLOOD LIGHT



	Lm	W	Lm/W
35W	3771	25	152
60W	6725	41	163
80W	8867	55	162
150W	17793	117	152
320W	39027	250	156

Based on 6H6V NEMA Pattern



FINISH
Bronze, White



SENSOR
None



OFS

LED FLOOD LIGHT



	Lm	W	Lm/W
35S	5005	35	143
50S	7150	50	143



FINISH
Bronze



MOUNTING
Knuckle, Yoke



OLS

LED SECURITY
FLOOD LIGHT



	Lm	W	Lm/W
16W	2329	18.4	126.9
25W	3257	27.3	119.4

Based on 5000K CCT | Night Light Function ON



FINISH
Black, Bronze, White




MOUNTING
Mounting Bracket



SENSOR
PIR



SECURITY
108-Lumen Night Light, None



DUAL-HEAD TILT
360° Rotation & 180° Tilt



SCONCES

PERFORMANCE


CCT

SPECS

OSA LED ADJUSTABLE SCNCE



	Lm	W	Lm/W
30W	3239	28	116
50W	5193	48	108
80W	9056	80	113
120W	13796	124	111



FINISH
Bronze, White



SENSOR
Photocell, None



OSA3 LED ADJUSTABLE SCNCE



	Lm	W	Lm/W
50W	6982	50	139
120W	17239	124	140




FINISH
Bronze



SENSOR
Photocell, None



OSA4 LED ADJUSTABLE SCNCE



	Lm	W	Lm/W
30S	3176	25	127
50S	5319	40	132
80S	9692	70	138



FINISH
Bronze, White, Black



SENSOR
Photocell, Motion



WALL PACKS

PERFORMANCE

CCT

SPECS

OWF4 LED WALL PACK



	Lm	W	Lm/W
40S	5558	43	129
60S	8337	65	129
80S	11116	86	129



FINISH
Bronze, Black



SENSOR
12V Socket, None



EMERGENCY
8W, None



OWF5 LED WALL PACK



	Lm	W	Lm/W
40S	5826	40	151.5
100S	14220	100	149.4
150S	23246	150	164.6



FINISH
Bronze



SENSOR
12V Socket



EMERGENCY
None, 4W, 9W, 16W



WALL PACKS

PERFORMANCE

CCT

SPECS

OWG4 LED WALL PACK



	Lm	W	Lm/W
100S	10517	78	134



FINISH
White



SENSOR
Photocell



EMERGENCY
8W, None



OWG5 LED WALL PACK



For Near and Mid Throw only

	Lm	W	Lm/W
60S	8185	47	173
80S	10035	63	158
120S	14458	92	158

Based on Mid Throw



FINISH
Bronze



SENSOR
Photocell with optional 12V Socket



EMERGENCY
9W, None



OWP2 FULL CUT-OFF LED WALL PACK



	Lm	W	Lm/W
60S	7536	47	162
100S	12650	77	164

Based on Type III Distribution



FINISH
Bronze



SENSOR
Photocell with optional 12V Socket



EMERGENCY
9W, None



OPTICS
Type II/III/IV



OWR3 LED WALL PACK



	Lm	W	Lm/W
30W	3643	30	123



FINISH
Bronze



SENSOR
Photocell (Standard)



OWR4 LED WALL PACK



	Lm	W	Lm/W
15W	2003	15	135



FINISH
Bronze



SENSOR
Photocell (Standard)



EMERGENCY
*15W / None




*15W: Only available with emergency option;
20W: Not available with emergency option

OWT HALF MOON LED WALL PACK



	Lm	W	Lm/W
80S (Down)	10288	62	165
80S (Up/Down)	10290	62	165

Based on Type III Distribution



FINISH
Bronze



SENSOR
Photocell with optional 12V Socket



EMERGENCY
9W, None



OPTICS
Type III/IV/V



NETWORK LIGHTING CONTROLS

Simplify Your Life with
NICOR Network Lighting Controls

3 Levels of Lighting Control



Single Luminaire



Zone



Building

NLC ZONE CONTROLLERS

NLCPS1
3A Power Pack w/ 12V Output

NLCPC1
20A Zone and Plug Load Controller

NLCPPA104SB1
20A Zone and Plug Load Controller w/ 12V + ECO

NLCPC2
3A Zone Controller

NLCMUL924
Emergency Lighting Controller

NLC SENSORS

NLCSPCW1WH
Ceiling Mount Sensor
PIR / Daylight Harvesting

NLCSPCWNBWH
Non-Bluetooth Sensor
PIR / Daylight Harvesting

NLCSPSS1WH
Snap-in Sensor
PIR / Daylight Harvesting

NLCBCS107C1
Battery Powered Ceiling Sensor
PIR / Daylight Harvesting

NLCCS107DB1
Line Voltage Occupancy Sensor
PIR / Ultrasonic / Daylight Harvesting

NLCEFS107EAO
12V Dual-Tech Ceiling Eco Sensor
PIR / Ultrasonic / Daylight Harvesting

NLCSPW1WH-LHW
End-Mount Sensor with Lens
PIR / Daylight Harvesting

NLCSPJ1WH-LHW
3.5mm Sensor with Lens
PIR / Daylight Harvesting

NLC SWITCHES

NLCW31WH
3-Button Wireless Dimming Switch

NLCW51WH
5-Button Wireless Dimming Switch w/ 3-Scenes

NLCWP1013SA0
3-Key Line Voltage BLE Switch

NLCWP1017SA0
7-Key Line Voltage BLE Switch w/ 4-Scenes

NLCIWS102B1
4-Button Switch w/ PIR Sensor

NLCDWS102B1
4-Button Switch w/ PIR + Ultrasonic Sensor

NLC OUTDOOR CONTROLS

NLCEFS106-WHBL
Plug and Play High Bay Long-Range Outdoor
Sensor with Lens

NLCWPPA102AUXWC1
Plug and Play Long-Range Outdoor Node

NLCCR02WENCL
Long-Range Astronomical Clock / Extender USB
Dongle Outdoor Enclosure

NLC ACCESSORIES

HBCSOCKETADAPT1
3.5mm to 3 Pin Adapter

NLCWSC06W
3.5mm to 3 Pin Outdoor Adapter

NLCWP1WH
Wall-Mount Switch Base with Faceplate

NLCSC1
6.5ft Plenum rated Sensor Cable

NLCSC2
6.5ft Plenum rated Sensor Cable with Connector

H12V2ADJARM1WH
Adjustable 3.5mm Adapter

NLCSPCMOUNT1
Ceiling Mount for Sensor

H12VSOCKET
3.5mm socket

NLCCR01RTC
Real Time Clock

NLCE1
Energy Monitor + Real Time Clock

NLC SENSOR LENSES*

NLCLHN1WH
77° Beam Angle Lens

NLCLMW1WH
103° Beam Angle Lens

Compatible with
[NLCSPW1WH-LHW](#) and [NLCSPJ1WH-LHW](#)

Explore a wide range of products with **NICOR** brochures and catalogs to uncover additional lighting solutions.

Warehouse Locations


Albuquerque, NM
Buford, GA
Roseville, CA

T. 800.821.6283
F. 800.892.8393
E. sales@nicorlighting.com

2200 Midtown Pl. NE
Albuquerque, NM 87107 USA
www.nicorlighting.com



Scan QR for the latest
Quick-Reference Guide



LIT-QRG
20261013

©2026 NICOR® • ALL RIGHTS RESERVED

NICOR®