NICOR®

High-Performance Lighting Technology

Quick-Reference Guide

DOWNLIGHTS



RECESSED

PERFORMANCE | CCT | SPECS

DCG Select
LED RECESSED
GIMBAL DOWNLIGHT



	Lm	W	Lm/W
4"	731	7	99
6"	938	9	99

CCT: 3500K, 3000K, 4000K, 2700K, 5000K

FINISH Black, White
CRI 90+
TILT 0° - 30°

DCR Select
LED RECESSED
DOWNLIGHT



	Lm	W	Lm/W
4"	729	7.2	101
5/6"	923	9.2	100

CCT: 3500K, 3000K, 4000K, 2700K, 5000K

FINISH Smooth, Baffle
CRI 95

DEB56
LED RECESSED
EYEBALL DOWNLIGHT



	Lm	W	Lm/W
5/6"	971	13	78

27K, 30K, 40K

FINISH White
CRI 90+
TILT 0° - 30°

DLG
LED RECESSED
GIMBAL DOWNLIGHT



	Lm	W	Lm/W
2"	678	9	79
4"	612	9	67
5/6"	1034	13	83

27K, 30K, 40K

FINISH Black, White, Oil-Rubbed Bronze
TILT 0° - 35°
HOUSING New Construction, Remodel, ICAT

DLR3 Select
LED RECESSED
DOWNLIGHT



	Lm	W	Lm/W
3"	811	7.5	108

CCT: 3500K, 3000K, 4000K, 2700K, 5000K

FINISH Baffle
TRIM White
CRI 95

DLR4-R
4" RETRACTABLE
LED DOWNLIGHT



	Lm	W	Lm/W
4" Round	600	8.5	70.6

27K, 30K

FINISH White

DLRv6
LED RECESSED
DOWNLIGHT



	Lm	W	Lm/W
4" 700lm	735	8	93
5/6" 900lm	934	10	91
5/6" 1200lm	1231	14	89

CCT: 3500K, 3000K, 4000K, 2700K, 5000K

FINISH Smooth, Baffle
TRIM Black, Black Baffle, Bronze, Nickel
FRAME New Construction

DLRv6P
LED RECESSED
DOWNLIGHT



	Lm	W	Lm/W
5/6" 900lm	923	9.2	100

CCT: 3500K, 3000K, 4000K, 2700K, 5000K

FINISH White, White Baffle, Black, Black Baffle
FRAME New Construction

All performance data are based on **3000K** CCT, Medium Wattage (if selectable).
For the most up-to-date information, see product spec-sheets available online.

RECESSED

PERFORMANCE | CCT | SPECS

DLRv7
LED RECESSED
DOWNLIGHT



	Lm	W	Lm/W
4" 900lm	764	6.5	117.9
5/6" 1500lm	1264	11.6	108.7

CCT: MED, WARM, NEUTRAL, 2700K, 3000K, 3500K, 4000K

FINISH Smooth, Baffle
TRIM Black, Black Baffle, Bronze, Nickel, Nickel Baffle
FRAME New Construction

DQR/DLQ
SQUARE LED
RECESSED DOWNLIGHT

	Lm	W	Lm/W
3"	552	9	62
4"	681	11	60
5"	1039	16	66
6"	1050	16	68

27K, 30K, 40K

FINISH Baffle
TRIM Black*, White
CRI 90

*Available only for DQR6

DQR2
SQUARE LED
RECESSED DOWNLIGHT



	Lm	W	Lm/W
2"	628	9	71

27K, 30K, 40K

FINISH Black, White, Nickel, Oil-Rubbed Bronze
HOUSING New Construction, Remodel, ICAT

DQR2-AA
SQUARE ADJUSTABLE
LED RECESSED
DOWNLIGHT



	Lm	W	Lm/W
2"	674	9	77

27K, 30K

FINISH Black, White, Nickel, Oil-Rubbed Bronze
TILT 0° - 30°

DQR4MA Select
4" MULTI-ADJUSTABLE
LED RECESSED
DOWNLIGHT



	Lm	W	Lm/W
4"	772	8	101

CCT: 3500K, 3000K, 4000K, 2700K, 5000K

FINISH White
TILT 0°- 30°
CRI 90+

IXD
CONTRACTOR
LED RECESSED
DOWNLIGHT



	Lm	W	Lm/W
4"	788	10	81
5"/6"	933	12	80

CCT: 3500K, 3000K, 4000K, 2700K, 5000K

FINISH Black, White
SHAPE Round
CRI 90

RCQ
SQUARE LED
RECESSED DOWNLIGHT



	Lm	W	Lm/W
4"	855	10	86
6"	1248	14	92

CCT: 3500K, 3000K, 4000K, 2700K, 5000K

FINISH White
CRI 95

RDN
LED RECESSED
DOWNLIGHT WITH
NIGHT LIGHT



	Lm	W	Lm/W
4"	756	7.4	102
5"/6"	975	9.4	103

CCT: 3500K, 3000K, 4000K, 2700K, 5000K

FINISH Black, Black Baffle, White, White Baffle
NIGHT LIGHT 2000K
CRI 95+

SURFACE-MOUNT

PERFORMANCE | CCT | SPECS

DLFv5
SUREFIT
SURFACE-MOUNT
LED DOWNLIGHT

	Lm	W	Lm/W
8W	675	8	85
10W	787	10	85
12W	971	12	84



FINISH
White

SHAPE
Round, Square, Wall Wash

TRIM
Black, Bronze

IXE
CONTRACTOR
EDGE-LIT LED WAFER



	Lm	W	Lm/W
4"	621	8	74
6"	1097	11	96



FINISH
White, Black*

SHAPE
Round

TRIM**
Black, Bronze, Nickel

CRI
80

** Black finish is 4" only*
***4" offers Black and Oil-Rubbed Bronze; 6" offers all three*

DSE Select
EDGE-LIT
SURFACE-MOUNT
LED DOWNLIGHT

RD	Lm	W	Lm/W
5"	627	10	60
8"	966	16	62
9"	1285	18	71
SQ	**Lm**	**W**	**Lm/W**
4"	629	11	59
6"	962	16	62
9"	1243	19	69



FINISH
White

SHAPE
Round, Square

TRIM*
Black, Bronze, Nickel

**Round Trims only*

DSE 11/15
EDGE-LIT
SURFACE-MOUNT
LED DOWNLIGHT

	Lm	W	Lm/W
11"	1552	16	98
15"	2058	19	108



FINISH
White

SHAPE
Round

MOUNTING
Surface, Pendant

RCD
LOW PROFILE
SURFACE-MOUNT
LED DOWNLIGHT

24 PACK BULK ORDER

	Lm	W	Lm/W
4"	630	10	63
6"	977	65	65



FINISH
White

CRI
90

RSD
SURFACE-MOUNT LED
DOWNLIGHT



	Lm	W	Lm/W
4"	649	11	61
6"	970	16	62
8"	1152	19	62

27K
30K
40K
50K

FINISH
White

CRI
93+

RSD Select
SURFACE-MOUNT LED
DOWNLIGHT



	Lm	W	Lm/W
4"	655	11	60
5/6"	999	15	65
8"	1264	19	68



FINISH
White*, Black, Bronze, Nickel

CRI
90

**8" only available in White*

SURFACE-MOUNT

PERFORMANCE | CCT | SPECS

RSDS-M
SURFACE-MOUNT
LED DOWNLIGHT
WITH PIR MOTION SENSOR

	Lm	W	Lm/W
4"	611	10	63



FINISH
White

SENSOR
65° PIR Sensor

RSDS-M2
SURFACE-MOUNT
LED DOWNLIGHT
WITH PIR MOTION SENSOR

	Lm	W	Lm/W
4"	785	10	79
6"	1140	14	83



FINISH
White

SENSOR
65° PIR Sensor

CANLESS

PERFORMANCE | CCT | SPECS

CLRv3 Select
COMMERCIAL LED
RECESSED DOWNLIGHT



	Lm	W	Lm/W
4"	1137	10	115
6"	1654	18	95
8"	2988	29	102



FINISH
White

TRIM
Black

CLRv3 Select Low Lumen
COMMERCIAL LED
RECESSED DOWNLIGHT



	Lm	W	Lm/W
4"	686	8	87
6"	798	9	90
8"	1525	15.5	98



FINISH
White

TRIM
Black

DGC Select
LED RECESSED GIMBAL
DOWNLIGHT



	Lm	W	Lm/W
4"	763	9	87



FINISH
White, Bronze, Black

TILT
0° - 25°



DGD Select
GIMBAL RECESSED
LED DOWNLIGHT



	Lm	W	Lm/W
2"	461	5	97
3"	606	8	77
4"	845	11	75



FINISH
White, Black, Bronze

CRI
90 +

TILT
0° - 32°



DGF Select
LED RECESSED FLOATING
GIMBAL DOWNLIGHT



	Lm	W	Lm/W
4"	766	9	87



FINISH
White, Bronze, Black

TILT
0° - 90°



All performance data are based on **3000K** CCT, Medium Wattage (if selectable).
For the most up-to-date information, see product spec-sheets available online.

CANLESS

PERFORMANCE | CCT | SPECS

RRD
2" RECESSED LED DOWNLIGHT



	Lm	W	Lm/W
8W	726	8	96
14W	1202	13	94

STYLES Trim, Trimless
SHAPE Round, Square
TRIM Black, White

REL
EDGE-LIT LED DOWNLIGHT

	Lm	W	Lm/W
4"	680	10	66
6"	921	12	78
8"	1306	18	73

27K, 30K, 40K, 50K

FINISH White
SHAPE Round
TRIM Black, Bronze, Nickel

REL Select
EDGE-LIT RECESSED LED SELECTABLE DOWNLIGHT



RD	Lm	W	Lm/W
3"	587	8	77
4"	710	11	67
6"	943	12	77
8"	1327	18	74

SQ	Lm	W	Lm/W
4"	658	11	62
6"	903	13	72

FINISH Black, White
SHAPE Round, Square
TRIM* Black, Bronze, Nickel

*Round Trims only except 3"

RELS-R
EDGE-LIT RECESSED LED SELECTABLE DOWNLIGHT



RD	Lm	W	Lm/W
4"	710	11	67
6"	943	12	77

SQ	Lm	W	Lm/W
4"	658	11	62
6"	903	13	72

FINISH Baffled White
SHAPE Round, Square

REL-FR
FIRE-RATED EDGE-LIT LED DOWNLIGHT



	Lm	W	Lm/W
4"	957	11	88
6"	1281	15	88

FINISH White
CRI 90
RATING 2 Hours Fire Rated

REL6-UNV
EDGE-LIT RECESSED LED SELECTABLE DOWNLIGHT
UNIVERSAL VOLTAGE



	Lm	W	Lm/W
6"	1102	13	88

FINISH Smooth, Baffle
VOLTAGE 120-277V (UNV)

RMP
3" LED MONOPOINT



	Lm	W	Lm/W
3"	1037	11.7	88.6

FINISH Black, White
TILT & ROTATION 355° Rotation & 180° Tilt
CRI 90

SYSTEMS

PERFORMANCE | CCT | SPECS

DLQ5
NEW CONSTRUCTION LED DOWNLIGHT
SQUARE



	Lm	W	Lm/W
5"	1189	16	75

30K

FINISH White
CRI 90
FRAME New Construction

DLQ5-MA
NEW CONSTRUCTION LED DOWNLIGHT
SQUARE ADJUSTABLE



	Lm	W	Lm/W
5"	1070	16	67

27K, 30K

FINISH White
TILT 0° - 83°
FRAME New Construction

DDA
3" SPECIFICATION GRADE DOWNLIGHT SYSTEM



	Lm	W	Lm/W
ADJUSTABLE	1776	21	85
REMODEL	1776	21	85

Based on Wide optic, 3000K CCT

27K, 30K, 35K, 40K, 50K
D-TO-W

HOUSING Adjustable, Remodel, New Construction
FINISH Smooth, Baffle
TRIM White, Black, Specular
SHAPE Round, Square, WW
LOCATION Wet/Damp Location
CRI 80, 90
OPTICS Beam Patterns

CDG
MODULAR LED DOWNLIGHT



	Lm	W	Lm/W
4"	2165	24	90
6"	2323	24	96


Based on 36° Medium optic, 3500K CCT, 25W

REFLECTOR White, Haze, Specular
CRI 94
OPTICS Medium-Narrow, Medium, Wall Wash
APPLICATION New Construction, Remodel
EMERGENCY 4W, 8W
SENSOR NLC

All performance data are based on **3000K** CCT, Medium Wattage (if selectable).
For the most up-to-date information, see product spec-sheets available online.

SPECIALTY



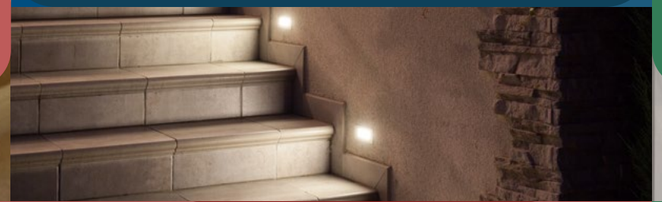

DOOR CHIME KITS

PERFORMANCE | VOLTAGE | SPECS

EDC
SINGLE-GANG ELECTRONIC DOOR CHIME



Selectable Chimes & Volume

2W | 5 VDC

FINISH
White

BUTTON STYLE
Standard (Lighted), Round Stucco (SB)

BUTTON FINISH
Stucco Button - Nickel, Bronze

PrimeChime+2
ELECTRONIC DOOR CHIME
VIDEO COMPATIBLE



Selectable Chimes & Volume

VIDEO DOORBELL COMPATIBLE

20W | 20 VAC

FINISH
White

BUTTON STYLE
Standard (Lighted), Rectangular Deco (DB), Round Stucco (SB)

BUTTON FINISH
Deco Button: White, Black, Copper, Nickel

Stucco Button: White, Polished Brass, Brushed Nickel, Antique Brass, Architectural Bronze

ACCESSORY
PRCP2STROBE
PRCP2EBADAPT1WH
PRCHIMEADAPT1WH

PRMC/PRMC-WL
PRIMECHIME PLUS 2 MINI®
VIDEO COMPATIBLE



Selectable Chimes & Volume

VIDEO DOORBELL COMPATIBLE

21W | 24 VAC

FINISH
White

BUTTON STYLE
Standard (Lighted), Rectangular Deco (DB), Round Stucco (SB)
* Wireless

BUTTON FINISH
Deco Button: White, Black, Copper, Nickel

Stucco Button: White, Polished Brass, Brushed Nickel, Antique Brass, Architectural Bronze

ACCESSORY
* PRCHIMEADAPT1WH Available

* Ring adapter PRCHIMEADAPT1WH only available for PRMC

STEP LIGHTS

PERFORMANCE | CCT | SPECS

STP2
LED STEP LIGHT

	Lm	W
Louvered	27	1
Louvered (PC)	27	1.5
Open Face	57	1
Open Face (PC)	57	1.5

27K


FINISH
White, Black, Oil-Rubbed Bronze

TRIM
Louvered, Frosted

SENSOR
Photocell (PC), None

LOCATION
Wet Location

STW
WET LOCATION LED STEP LIGHT



	Lm	W
Vertical	35	3
Horizontal	75	5

30K

FINISH
White, Black, Bronze

SHAPE
Vertical, Horizontal

LOCATION
Wet Location

UNDER CABINETS



PERFORMANCE | CCT | SPECS

NUC Select v5
LED UNDER CABINET



	Lm	W	Lm/W
8"	276	4	76
12"	426	5	81
21"	706	9	82
30"	810	11	73
40"	1159	16	75

Based on 3000K CCT

ccl select

FINISH
White, Black, Bronze, Nickel

SIZES
8", 12", 21", 30", 40"

CRI
92+

UCB Select
LED UNDER CABINET



	Lm	W	Lm/W
9"	345	5	69
12"	345	5	69
18"	621	9	69
21"	621	9	69
24"	621	9	69
33"	966	14	69
42"	1242	18	69

Based on 3000K CCT

ccl select

FINISH
White

SIZES
9", 12", 18", 21", 24", 33", 42"


SWITCH
With Switch, Without Switch

CRI
90+



Ask about our UCB Counter Display

ARCHITECTURAL LINEARS

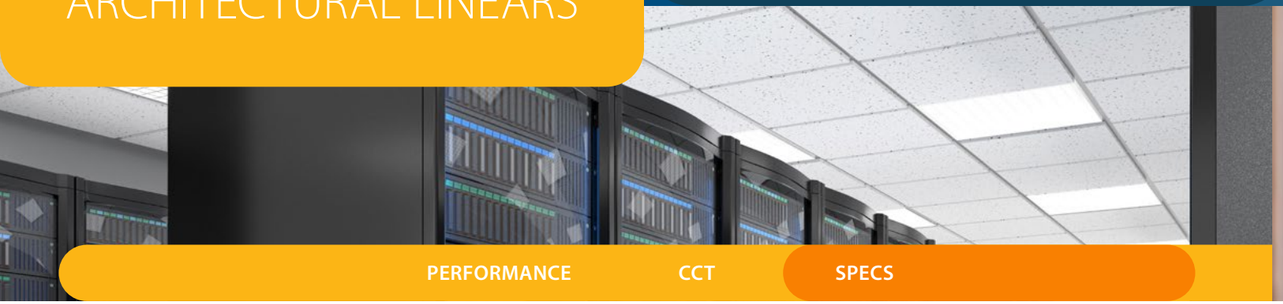

PERFORMANCE | CCT | SPECS

LSA
ARCHITECTURAL LED DIRECT/INDIRECT LINEAR



	Lm	W	Lm/W	
4'	3,200-10,800	23-73	>140	30K, 35K
6'	3,400-9,221	23-56	>150+	40K
8'	6,000-12,780	43-85	>140+	50K

FINISH
White, Silver, Black, Custom*

DRIVER
Integral (0-10V) and DALI Control

DISTRIBUTION
10 Up/90 Down

MOUNTING
Pendant, Surface Mount, Aircraft Cable

SENSOR
DALI2 PIR, Microwave, N-Light, and PIR.

EMER
EMS8, None

**Special order available with MOQ order only*

LSE
ARCHITECTURAL LED DIRECT/INDIRECT LINEAR



	Lm	W	Lm/W	
4'	3,000-6,850	23-49	>130	35K, 40K
8'	6,000-10,900	46-80	>130	40K, 50K

FINISH
White, Silver, Custom*

DRIVER
Integral (0-10V) and DALI Control

DISTRIBUTION
10 Up/90 Down
20 Up/80 Down
50 Up/50 Down
80 Up/20 Down
100 Down

MOUNTING
Pendant, Wall Mount, Aircraft Cable, Continuous Run

SENSOR
DALI2 PIR, Microwave, N-Light, and PIR.

EMER
EMS8, None

**Special order available with MOQ order only*

LSQ
ARCHITECTURAL LED DIRECT LINEAR



	Lm	W	Lm/W	
4'S	4021	26	155	35K
4'H	6603	51	129	40K
8'	6603	51	129	50K

Based on 4000K CCT

FINISH
White, Black, Silver, and Custom*

DRIVER
Integral (0-10V) and DALI Control

MOUNTING
Recessed, Pendant, Surface Mount, Wall Mount, and Aircraft Cable

SENSOR
DALI2 PIR, Microwave, N-Light, and PIR.

EMER
EMS8, None

**Special order available with MOQ order only*

LINEARS & WRAPS



LINEARS | PERFORMANCE | CCT | SPECS

LLR
LAMP READY STRIP



VOLTAGE 120-277 VAC
LAMP TYPE T8 Type B
MAX W 22W per Lamp

FINISH
White

MOUNTING
Surface

Lamps not included

LSC2 Select
SELECTABLE CCT & OUTPUT LED LINEAR STRIP

DLC LISTED PREMIUM

	Lm	W	Lm/W
2'	2795	20	144
4'	4135	29	142
8'	9684	68	143

double select: LOW, MED, HIGH; 3000K, 4000K, 5000K, 6500K

FINISH
White

MOUNTING
Surface, Cable, Hook and Chain

SENSOR
Microwave, and NLC Microwave

LSC28F
SELECTABLE CCT & OUTPUT LED FOLDABLE LINEAR STRIP




	Lm	W	Lm/W
8'	92726	66	146

FINISH
White

MOUNTING
Surface, Cable, Hook and Chain

SENSOR
MW, NLC, None

LSL1-NP
TUNABLE LED LINEAR STRIP LIGHT



DLC LISTED PREMIUM

	Lm	W	Lm/W
2'	2687	20	132
4'	5637	39	146
8'	11125	75	149

double tunable: 3K, 5K; LOW, HIGH

FINISH
White

MOUNTING
Surface, Cable, Hook and Chain, and Pendant

SENSOR
NLC

WRAPAROUNDS | PERFORMANCE | CCT | SPECS

WPA Select
LED LINEAR WRAP

	Lm	W	Lm/W
4'	4649	38	138

double select: LOW, MED, HIGH; 3000K, 3500K, 4000K, 5000K, 6500K

FINISH
White

CRI
80

SENSOR
Microwave, NLC Microwave

All performance data are based on **4000K** CCT, Medium Wattage (if selectable).
For the most up-to-date information, see product spec-sheets available online.



WRAPAROUNDS

PERFORMANCE | CCT | SPECS

WLR
LAMP-READY WRAP



VOLTAGE 120-277 VAC
LAMP TYPE T8 Type B
MAX W 22W per Lamp

FINISH
White

MOUNTING
Surface

Lamps not included

WPC4
LED LINEAR WRAP



DLC LISTED PREMIUM

	Lm	W	Lm/W
2'	2634	20	134
4'	4891	37	132

double select: LOW, MED, HIGH; 3000K, 3500K, 4000K, 5000K

FINISH
White

CRI
80

WPP
LED PRISMATIC WRAP



DLC LISTED

	Lm	W	Lm/W
4'	5256	31.7	165.8

double select: LOW, MED, HIGH; 3000K, 3500K, 4000K, 5000K

FINISH
White

CRI
80+

LENS
Prismatic

SENSOR
None, Microwave, and NLC Microwave

UTILITY

PERFORMANCE | CCT | SPECS

UWL
360° TEMPORARY LED WORK LIGHT



	Lm	W	Lm/W
100	12000	100	120
150	18000	150	120

50K


FINISH
Orange

SAFETY CAGE
White

VOLTAGES
120-277V
UNV | HV

MOUNTING
Floor Stand, Folding Hook, Units Linkable up to 800W

USL
LED STRING LIGHT



Lm	W	Lm/W
15295	127	120.4

50K

FINISH
Yellow

CRI
80+

MOUNTING
Snap-lock carabiner at each head. Linkable up to 3 units for 300ft run

All performance data are based on **4000K** CCT, Medium Wattage (if selectable).
For the most up-to-date information, see product spec-sheets available online.

VAPORTITES



PERFORMANCE | CCT | SPECS

VT3-20
LED VAPORTITE



DLC LISTED

	Lm	W	Lm/W
2S	2606	20	130
8H	11637	90	130

40K
50K

FINISH
Light Gray

MOUNTING
Surface Mount
Cable Suspension

EMERGENCY*
8W and 16W

Available on 8Ft fixture only

VT4
LED VAPORTITE



DLC LISTED

	Lm	W	Lm/W
4'	6623	45	149

double select: LOW, MED, HIGH; 3000K, 3500K, 4000K, 5000K

FINISH
Light Gray

MOUNTING
Surface Mount
Cable Suspension

SENSOR
None, Microwave, and NLC Microwave

EMERGENCY
8W and 18W

VT5
LED VAPORTITE



DLC LISTED PREMIUM

	Lm	W	Lm/W
2'	3211	21.3	150
4'	6340	40.5	156
8'	10556	66.0	160

double select: LOW, MED, HIGH; 3000K, 3500K, 4000K, 5000K

FINISH
Light Gray

MOUNTING
Surface Mount
Cable Suspension

SENSOR
Internal MW,
External MW/PIR, NLC
SENSORMWBT1KI (Available)

EMERGENCY
*4W, **8W, ***18W

* Available on 2ft fixture only
** Available on 4ft fixture only
*** Available on 8ft fixture only

VTJ
LED JELLY JAR



DLC LISTED

Lm	W	Lm/W
2585	20.6	125.7

CCT select: 4000K; 3000K, 5000K

FINISH
Gray

MOUNTING
Surface mount with adjustable arm

TROFFERS & PANELS



PERFORMANCE | CCT | SPECS

TAC2 Select
ARCHITECTURAL LED TROFFER



DLC LISTED PREMIUM

	Lm	W	Lm/W
1' x 4'	3546	25	142
2' x 4'	5047	37	137

double select: LOW | MED | HIGH | 3500K | 4000K | 5000K

FINISH
White

SIZE
1'x4' & 2'x4'

MOUNTING
Surface Mount Kit, Drywall Flange Kit

SENSOR
NLC, None

EMERGENCY
4.5W, 8W

E1 (4.5W) | E2 (8W)

TAC3 Select
ARCHITECTURAL LED TROFFER

DLC LISTED

	Lm	W	Lm/W
2' x 2'	3883	27.7	140
2' x 4'	5256	37.8	139

double select: LOW | MED | HIGH | 3500K | 4000K | 5000K

FINISH
White

SIZE
2'x2' & 2'x4'


SENSOR
None

EMERGENCY
4.5W, 8W (MTO), 8W (QS)

E1 (4.5W) | E2 (8W MTO) | E3 (8W QS)

MTO = Made to Order
QS = Quick Ship

TAC3S Select
SENSOR READY ARCHITECTURAL LED TROFFER



DLC LISTED PREMIUM

	Lm	W	Lm/W
2' x 2'	2655	19	138
2' x 4'	5446	41	134

double select: LOW | MED | HIGH | 3500K | 4000K | 5000K

FINISH
White

SIZE
2'x2' & 2'x4'

SENSOR
NLC, None

EMERGENCY
4.5W, 8W (MTO), 8W (QS)

E1 (4.5W) | E2 (8W MTO) | E3 (8W QS)

MTO = Made to Order
QS = Quick Ship

All performance data are based on **4000K** CCT, Medium Wattage (if selectable).
For the most up-to-date information, see product spec-sheets available online.

PERFORMANCE | CCT | SPECS

T7C
LED BACKLIT TROFFER

DLC LISTED PREMIUM

	Lm	W	Lm/W	
1' x 4'	3590	27	131	35K / 40K
2' x 2'	4525	35	131	50K

FINISH
White

SIZE
1'x4' & 2'x2

MOUNTING
Surface Mount Kit, Drywall Flange Kit

SENSOR
NLC, None

EMERGENCY
4.5W, 8W

E1 4.5W | E2 8W

TAR Select v2
ARCHITECTURAL LED TROFFER RETROFIT KIT



	Lm	W	Lm/W
1'x 4'	3664	25	144
2' x 2'	3694	25	146
2' x 4'	5790	38	151

double select: LOW | MED | HIGH | 3500K | 4000K | 5000K

FINISH
White

SIZE
1'x4', 2'x2' & 2'x4'

SENSOR
NLC, None

EMERGENCY
4.5W, 8W

E1 (4.5W) | E2 (8W)

TAR Select v3
SENSOR-READY ARCHITECTURAL LED TROFFER RETROFIT KIT



DLC LISTED (2' x 2')

DLC LISTED PREMIUM (1' x 4' and 2' x 4')

	Lm	W	Lm/W
1'x4'	3215	20	163
2' x 2'	3063	20	156
2' x 4'	4347	28	155

double select: LOW | MED | HIGH | 3500K | 4000K | 5000K

FINISH
White

SIZE
1'x4', 2'x2' & 2'x4'

SENSOR
NLC, None

EMERGENCY
8W

E1 (8W)

TGL4 Select
LED BACKLIT TROFFER

DLC LISTED

	Lm	W	Lm/W
1' x 4'	5022	41	123
2' x 2'	3938	29	137
2' x 4'	4835	39	126

double select: LOW | MED | HIGH | 3500K | 4000K | 5000K

FINISH
White

SIZE
1'x4', 2'x2' & 2'x4'


MOUNTING
Surface Mount Kit, Drywall Flange Kit

EMERGENCY
4.5W, 8W (MTO), 8W (QS)

E1 (4.5W) | E2 (8W MTO) | E3 (8W QS)

MTO = Made to Order | QS = Quick Ship

TGL4S Select
SENSOR READY LED BACKLIT TROFFER



DLC LISTED PREMIUM

	Lm	W	Lm/W
1' x 4'	3142	25	124
2' x 2'	3435	24	142
2' x 4'	5157	38	135

double select: LOW | MED | HIGH | 3500K | 4000K | 5000K

FINISH
White

SIZE
1'x4', 2'x2' & 2'x4'

SENSOR
Ready

EMERGENCY
4.5W, 8W (MTO), 8W (QS)

E1 (4.5W) | E2 (8W MTO) | E3 (8W QS)

MTO = Made to Order | QS = Quick Ship

HIGH/LOW BAYS



PERFORMANCE | CCT | SPECS

HBC4
LED UFO LOW/HIGH BAY



	Lm	W	Lm/W	CCT
100W	14945	102	147	40K
240W	34446	241	143	50K
400W	53747	392	137	

FINISH White, Black

CRI 80+

SENSOR PIR, MW, NLC, None

MOUNTING Pendant, Yoke Mount, Hook & Bolt

VOLTAGES 120-277V (UNV), 277-480V (HV)

ACCESSORY Glare Shield, Wireguard, Reflectors

EMERGENCY EMB4002UNVBK**

*** Not available on 400W or High-Voltage models*

HBC5
DOUBLE SELECT
LED UFO LOW/HIGH BAY



	Lm	W	Lm/W
150S	17366	120	145
240S	32054	220	146
300S	40509	270	150

FINISH White, Black

CRI 80+

SENSOR PIR, MW, NLC, None

MOUNTING Pendant, Yoke Mount, Hook & Bolt

VOLTAGES 120-277V (UNV), 277-480V (HV)

ACCESSORY Glare Shield, Wireguard, Reflectors

EMERGENCY EMB4002UNVBK**

*** Not available on 400W or High-Voltage models*

HBC6
TRIPLE SELECT
LED UFO LOW/HIGH BAY



	Lm	W	Lm/W
150S	18217	108	170
240S	35470	204	174

Based on 80° Beam Angle

FINISH White, Black

OPTICS 60°, 80°, 100°

SENSOR PIR, MW, NLC, None

MOUNTING Pendant, Yoke Mount, Hook & Bolt

VOLTAGES 120-277V

ACCESSORY Glare Shield, Wireguard, Reflectors

EMERGENCY EMB4002UNVBK

All performance data are based on **4000K** CCT, Medium Wattage (if selectable).
For the most up-to-date information, see product spec-sheets available online.

PERFORMANCE | CCT | SPECS

HBL4
LED LINEAR LOW BAY/HIGH BAY



	Lm	W	Lm/W	CCT
105W	14780	106	140	40K
155W	21460	155	139	50K
210W	27302	205	133	
300W	41178	305	135	

SENSOR PIR, MW, NLC, None

VOLTAGE 120-277V (UNV), 347-480V (HV)

MOUNTING Pendant, Surface Mount, Aircraft Cables, Hook & Chain

EMERGENCY 25W

HBN
NSF RATED LED HIGH-BAY



	Lm	W	Lm/W
150S	21859	126	174
300S	45026	259	174

SENSOR PIR, MW, NLC, None

MOUNTING Pre-installed Mounting Rings and Surface Mount

EMERGENCY Standard: 16W, 25W
Cold Weather: 15W, 20W

HML1
LED HIGH-PERFORMANCE HIGH BAY



	Lm	W	Lm/W	CCT
100W	14200	101	141	40K
130W	18138	129	141	50K
150W	20574	147	140	
210W	29258	209	140	
300W	42055	305	137	
450W	66516	459	144	

Based on Standard Distribution

Note: Emergency not available on HV (277-480V) fixtures

MOUNTING Pendant, Surface Mount, Aircraft Cable, Hook & Chain

LENS General (A), Wide (B), Aisle (C)

SENSOR PIR, MW, NLC, None

VOLTAGE 120-277V (UNV), 277-480V (HV)

EMERGENCY 8W, 18W, 25W, 40W

HML3
LED HIGH-PERFORMANCE HIGH BAY



	Lm	W	Lm/W
150S	17263	120	144
320S	39432	270	146

Based on Standard Distribution

Note: Emergency not available on HV (277-480V) fixtures

SENSOR PIR, MW, NLC, None

MOUNTING Pendant, Surface Mount, Aircraft Cable, Hook & Chain

LENS General (A), Wide (B), Aisle (C)

VOLTAGE 120-277V (UNV), 277-480V (HV)

EMERGENCY 18W, 40W (MTO)
18W, 40W (QS)

MTO = Made to Order | QS = Quick Ship

HML4
LED TRIPLE SELECT HIGH BAY



	Lm	W	Lm/W
160S	17933	115	156
240S	30291	192	158
320S	42289	268	158

Based on 90°x90° Distribution

SENSOR PIR, MW, NLC, None


MOUNTING Pendant, Surface Mount, Aircraft Cable, Hook & Chain

OPTICS 90°x90°, 65°x95°, 45°x100°

VOLTAGE 120-347V (UNV)

EMERGENCY 18W, 40W

EMERGENCY

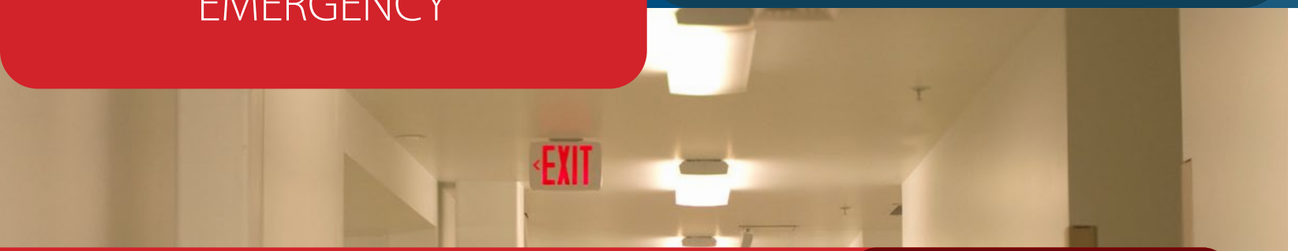

EMERGENCY LIGHTS

PERFORMANCE | SPECS

EML1
LED EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	188	1.15	90min

FINISH
White ☐

REMOTE HEADS
ERH 1|2, ERHWP 1|2
ERH 1|2 | ERHWP 1|2

VERSIONS
Standard, Remote Capable
S | R

EML2
LED COMPACT EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	162	2.4	90min

FINISH
White ☐

EML3
LED EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	203	2.1/2.5*	90min

**Std / SD*

FINISH
White, Black ☐ ■

REMOTE HEADS
ERH 1|2 (WP)
ERH 3|4 (WP)
ERH 1|2 | ERHWP 1|2 | ERH 3|4SD | ERHWP 3|4SD

VERSIONS
Standard, Remote Capable, Self Diagnostic Remote Capable
S | R | SD | R+SD

EML4
LED COMPACT EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	272	2.1	90min

FINISH
White ☐

EML5
LED MICRO EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	151	1	90min

FINISH
White ☐

VERSIONS
Standard, Remote Capable
S | R

EML6
OUTDOOR LED EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	265	2.4	90min

FINISH
White ☐

EML7
LED HIGH-OUTPUT EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	700	3.5	90min

FINISH
White ☐

EML8
LED HIGH-OUTPUT EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	1200	3.3-4.5	90min

FINISH
White ☐

REMOTE HEADS

PERFORMANCE | SPECS

ERH1|2
LED EMERGENCY LIGHT REMOTE HEAD



	VDC	Lm	W
ERH1	3.6	113.4	1.2
ERH2	3.6	226.8	2.4

FINISH
White ☐

VERSIONS
Standard, Self-Diagnostic
S | SD

ERHWP1|2
LED EMERGENCY LIGHT WEATHER RESISTANT REMOTE HEADS



	VDC	Lm	W
ERHWP1	3.6	128.3	1.3
ERHWP2	3.6	256.6	2.6

FINISH
Gray ■

VERSIONS
Standard, Self-Diagnostic
S | SD

EXIT/EMERGENCY COMBOS

PERFORMANCE | SPECS

ECL1 Select
LED EMERGENCY EXIT SIGN COMBO



VAC	Lm	W	EM
120/277	193	3.5/4.0*	90min

*Std / Remote

FINISH White, Black

LETTER Selectable: Green, Red

FACES 1 Side, 2 Sides

REMOTE HEADS ECL*RH, ECL*RHWH

ECL2
SLIM LED EXIT SIGN COMBO



VAC	Lm	W	EM
120/277	160	3.3	90min

LETTER Green, Red

FACES 1 Side, 2 Sides

ECL3
SELF-DIAGNOSTIC LED EXIT SIGN COMBO



VAC	Lm	W	EM
120/277	203	3.3	90min

LETTER Green, Red

FACES 1 Side, 2 Sides

REMOTE HEADS ERH*SD, ERH*WPSD

ECL5
LED OUTDOOR EMERGENCY EXIT SIGN COMBO



VAC	Lm	W	EM
120/277	213	2.9/3.8	90min

LETTER Green, Red

FACES 1 Side, 2 Sides

EXIT SIGNS

PERFORMANCE | SPECS

EXL1
LED EMERGENCY EXIT SIGN



VAC	W	EM
120/277	3.8	90min

FINISH White

LETTER Green

EXL1-Select
LED EMERGENCY EXIT SIGN



VAC	W	EM
120/277	1.0	90min

FINISH White, Black

LETTER Selectable: Green, Red

VERSIONS Standard, Self-Diagnostic

EXIT SIGNS

PERFORMANCE | SPECS

EXL2-10
LED EDGE-LIT EXIT SIGN



VAC	W	EM
120/277	2.3	90min

FINISH Aluminum

LETTER Green, Red

FACES 1 Side, 2 Sides*

VERSIONS Standard, Self Diagnostic, AC-Voltage (Non-EM)

*Available on Mirrored models only

EXL23
LED EDGE-LIT EXIT SIGN



VAC	W	EM
120-277	2	90min

color select

Recessed Mount Option EXL2RECESSKIT Kit sold separately

FINISH Clear, Mirrored

LETTER Selectable Green, Red

FACES 1 Side, 2 Sides*

FACES 1 Side, 2 Sides*

*Available on Mirrored models only (simply remove pre-applied mirror sheet))

EXL4
SLIM LED EXIT SIGN



VAC	W	EM
120/277	1.6	90min

LETTER Green, Red

FACES 1 Side, 2 Sides

EXL5
WET LOCATION LED EXIT SIGN



	VAC	W	EM
RD	120/277	2.9/3.6	90min
GR	120/277	2.74/3.5	90min

FINISH White

LETTER Green, Red

FACES 1 Side, 2 Sides

EXL6
SELF-DIAGNOSTIC CAST-ALUMINUM EXIT SIGN



VAC	W	EM
120/277	5	90min

FINISH White/White Frame, White/Aluminum Frame, Aluminum/Black Frame

FACES 1 Side, 2 Sides

LETTER Green, Red

EMERGENCY PACKS

PERFORMANCE

EMA
CONSTANT POWER
EMERGENCY PACK
(4W/25W/40W)



EMA041UNV



EMA251WRV



EMA401WRV

	OUTPUT (VDC)	OUTPUT (W)	WEIGHT (LBS)
EMA041UNV	10-60	4	0.39
EMA251WRV	170	25	2.65
EMA401WRV	170	40	2.65

EMB
EMERGENCY PACK



EMB45



EMB80



EMB4002



EMB4002REMOTE

	OUTPUT (VDC)	OUTPUT (W)	WEIGHT (LBS)
EMB45	3-60	4.5	2.4
EMB80	3-60	8.5	3.1
EMB4002	130-190	40	8.8

EMI
EMERGENCY
INVERTER PACK



EMI200

	OUTPUT (VAC)	OUTPUT (W)	WEIGHT (LBS)
EMI200	120	20	7.2

EMSM
SURFACE MOUNT
FIXTURE EMERGENCY
BATTERY





Test button/Indicator light



Peel & stick to fixture/surface

	OUTPUT (VAC)	OUTPUT (W)	WEIGHT (LBS)
EMSMN13	120	13	2.36

OUTDOOR

PERFORMANCE | SPECS

EMO
OUTDOOR
EMERGENCY
BACKUP
ENCLOSURE KIT



OUTPUT (VDC)	WATTAGE (W)	WEIGHT (LBS)
170	8 or 18	1.54

FINISH
Bronze, White

EOF
LED EMERGENCY
OUTDOOR FULL CUTOFF



Lm	W	Lm/W
1554	17	92

Based on 3000K CCT

30K
50K

FINISH
White, Black*, Bronze, Silver*

CRI
70+

VERSIONS
Standard, Self-Diagnostic, Cold Weather, AC-Voltage (Non-EM)

S | SD | AC

**May be subject to minimum order quantity (MOQ). Please check factory for additional lead times.*

EOT
LED EMERGENCY
OUTDOOR TEAR DROP



Lm	W	Lm/W
1074	13	80

Based on 2000K CCT

27K
50K

FINISH
Bronze, Silver

CRI
80+

VERSIONS
Standard, Self-Diagnostic, Cold Weather, AC-Voltage (None-EM)

S | SD | AC

EOT2
LED EMERGENCY
OUTDOOR TEAR DROP



Lm	W	Lm/W
1815	13	137

Based on 4000K CCT

FINISH
Bronze

CRI
80+

VERSIONS
Standard, Cold Weather, AC-Voltage (Non-EM)

S | AC

HAZARDOUS LOCATION



PERFORMANCE | CCT | SPECS

XPL
LED LINEAR LUMINARE



1A	Lm	W	Lm/W
40W	4213	38	111
80W	8723	81	108

1B	Lm	W	Lm/W
40W	5267	41	129
80W	10994	80	137

Based on 4000K CCT

30K* | 40K* | 50K

**Consult for lead time. Non-EM models only.*

FINISH
Gray

CLASS 1A
C1D1 | Group: C, D
C1D2 | Group: A, B, C, D

CLASS 1B
C1D2 | Group: A, B, C, D
C2D1 | Group: E, F, G
C3

EMERGENCY
XPL1A080U50GR
XPL1B040U50GR
XPL1B080U50GR
C1D1 | Group: C, D
C2D1 | Group: E, F, G
C1D2 | Group: A, B, C, D

See spec sheet for more details.

XPR
LED AREA LIGHT



	Lm	W	Lm/W
45W	6426	42	152
65W	9416	65	145

Based on 4000K CCT

30K* | 40K* | 50K

**Consult for lead time*

FINISH
Gray

CLASS 1B
C1D2 | Group: A, B, C, D
C2D1 | Group: E, F, G
C2D2 | Group: F, G

XPQ
LED FLOOD LIGHT HIGH BAY



1A	Lm	W	Lm/W
80W	9055	74	123
100W	11927	98	122
150W	16916	140	121

1B	Lm	W	Lm/W
80W	9055	74	123
100W	11927	98	122
150W	16916	140	121

Based on 4000K CCT

30K* | 40K* | 50K

**Consult for lead time*

FINISH
Gray

CLASS 1A
C1D1 | Group: C, D
C1D2 | Group: A, B, C, D
C2D2 | Group: F, G

CLASS 1B
C1D2 | Group: A, B, C, D
C2D2 | Group: F, G

All performance data are based on **4000K** CCT, Medium Wattage (if selectable).
For the most up-to-date information, see product spec-sheets available online.

OUTDOOR



AREA LIGHTS

PERFORMANCE | CCT | SPECS

OAL3
LED AREA LIGHT



DLC LISTED PREMIUM

	Lm	W	Lm/W
150S	16643	120	139
200W*	27397	201	136
300S	33967	249	137

Based on Type III Optic
**5000K and single wattage only*

50K

double select: LOW | MED | HIGH | 3000K | 4000K | 5000K

FINISH
Bronze, White

OPTICS
Type II, Type III, Type IV, Type V
II | III | IV | V

SENSOR
3-Pin, 7-Pin, Motion Sensor
MW

MOUNTING
Pole Arm, Wall Box, Slipfitter, Straight Arm, Trunnion

OAL4
LED AREA LIGHT



DLC LISTED PREMIUM

	Lm	W	Lm/W
150S	17991	116	156
300S	36144	229	158

Based on Type III, 4000K CCT, Medium Wattage

triple select: LOW | MED | HIGH | 3000K | 4000K | 5000K | TYPE II | TYPE III | TYPE IV | TYPE V

FINISH
Bronze, White, Black

OPTICS
A (Type III/IV/V)
B (Type II/III/IV)
A (III/IV/V) | B (II/III/IV)

SENSOR
3-Pin, 7-Pin, MW Sensor
MW

MOUNTING
Pole Arm, Wall Box, Slipfitter, Straight Arm, Trunnion

OAL5
LED AREA LIGHT



DLC LISTED PREMIUM

Lm	W	Lm/W
8923	61	147

Based on Type III, 4000K CCT, Medium Wattage

double select: LOW | MED | HIGH | 3000K | 4000K | 5000K

FINISH
Bronze, Black

SENSOR
Motion Sensor Socket (12V)

OPTICS
Type II, Type III, Type IV, Type V
II | III | IV | V

POLES

SPECS

OPL
AREA LIGHT POLES

Special Order



FINISH
Bronze, White, Black

SHAPES
Round, Round Tapered, Square

DIAMETER
Round: 3" to 9"
Square: 3" to 9"

LENGTHS
All lengths available upon request

MATERIAL
Steel, Aluminum

MOUNT ACCESSORIES
Wall Bracket, Round Pole, Low Profile, Triple Tenon

Pre-drilled hole patterns available upon request.

SPECS

OPL2
AREA LIGHT POLES

In Stock



FINISH
Bronze

SHAPES
Square

DIAMETER
4" square

LENGTHS
15', 20', 25'

MATERIAL
Steel

COMPATIBLE FIXTURE
OAL3, OAL4, OAL5, OFL4*

MOUNT ACCESSORIES
Tenon Adapter, Bullhorn Adapter, Wall Mount Bracket, Base Cover/ Pole Cap

* 150W and 320W models only. Requires a tenon adapter.
Pre-drilled hole patterns available upon request.

BARN LIGHTS

PERFORMANCE | CCT | SPECS

ODL4
LED DUSK TO DAWN



	Lm	W	Lm/W
60S	6267	45	139
120S	11937	90	133

double select

FINISH
Bronze, Gray

SENSOR
Photocell

BOLLARDS

PERFORMANCE | CCT | SPECS

OBH
LED BOLLARD



DLC LISTED PREMIUM

	Lm	W	Lm/W
	430	10	61

30K
40K

FINISH
Stone Gray, Gray Aluminum

OBL2
LED BOLLARD



DLC LISTED PREMIUM
Cone model only

	Lm	W	Lm/W
Louver	1368	17	76
Cone	2895	18	162

double select

FINISH
Bronze

SENSOR
None

CANOPIES

PERFORMANCE | CCT | SPECS

OUC3
LED CANOPY



DLC LISTED PREMIUM

	Lm	W	Lm/W
45W	5412	42	130
80W*	9934	79	126

**Available in 4000K only*

40K
50K

FINISH
Bronze

SENSOR
Photocell, Motion Sensor, None

OUC4
LED CANOPY



DLC LISTED PREMIUM

	Lm	W	Lm/W
75S	7812	60	130
120S	12438	96	130

double select

FINISH
Bronze, White

SENSOR
Photocell (Standard), Motion Sensor

OUC5
LED CANOPY



DLC LISTED PREMIUM

	Lm	W	Lm/W
100S	15321	100	153

double select

FINISH
Black, White

SENSOR
Photocell (Standard), Motion Sensor

OUS
LED SPECIFICATION CANOPY



	Lm	W	Lm/W
45W	5529	44	126

40K
50K

FINISH
Bronze

SENSOR
Photocell, None

All performance data are based on **4000K** CCT, Medium Wattage (if selectable).
For the most up-to-date information, see product spec-sheets available online.

CYLINDERS

PERFORMANCE | CCT | SPECS

OWC
LED WALL MOUNT CYLINDER



	Lm	W	Lm/W
RD (Up/Down)	3355	34	100
SQ (DN)	2290	21	109

30K
50K

FINISH
Bronze, White

SHAPE
Round, Square

CONFIGURATION
Down, Up/Down

OWCR
LED WALL-MOUNT CYLINDER



	Lm	W	Lm/W
4" (Up/Down)	834	9	96
4" (Down Only)	1654	17	96
6" (Up/Down)	1389	16	88
6" (Down Only)	2755	30	92

Based on 40° Optics

double select

FINISH
Bronze

SENSOR
None

FLOOD LIGHTS

PERFORMANCE | CCT | SPECS

OFL2
LED FLOOD LIGHT



	Lm	W	Lm/W
12W	1238	12	106
30W	3071	29	106
50W	5363	51	106

Based on 3000K CCT

30K
50K

FINISH
Bronze

MOUNTING
Knuckle, Yoke*

**Available on 50W, 3000K only*

OFL4
ROUND-BACK LED FLOOD LIGHT



DLC LISTED PREMIUM

	Lm	W	Lm/W
35W	3771	25	152
60W	6725	41	163
80W	8867	55	162
150W	17793	117	152
320W	39027	250	156

Based on 6H6V NEMA Pattern

triple select

FINISH
Bronze, White

SENSOR
None

OFS
LED FLOOD LIGHT



DLC LISTED PREMIUM

	Lm	W	Lm/W
35S	5005	35	143
50S	7150	50	143

double select

FINISH
Bronze

MOUNTING
Knuckle, Yoke

OLS
LED SECURITY FLOOD LIGHT



	Lm	W	Lm/W
16W	2329	18.4	126.9
25W	3257	27.3	119.4

Based on 5000K CCT | Night Light Function ON

double select

NICOR NIGHTLIGHT

FINISH
Black, Bronze, White

MOUNTING
Mounting Bracket

SENSOR
PIR

SECURITY
108-Lumen Night Light, None

DUAL-HEAD TILT
360° Rotation & 180° Tilt

SCONCES

PERFORMANCE | CCT | SPECS

OSA
LED ADJUSTABLE SCONCE



	Lm	W	Lm/W
30W	3239	28	116
50W	5193	48	108
80W	9056	80	113
120W	13796	124	111

CCT: 40K, 50K

FINISH Bronze, White

SENSOR Photocell, None

OSA3
LED ADJUSTABLE SCONCE



DLC LISTED PREMIUM

	Lm	W	Lm/W
50W	6982	50	139
120W	17239	124	140

CCT: 50K

FINISH Bronze

SENSOR Photocell, None

OSA4
LED ADJUSTABLE SCONCE



DLC LISTED PREMIUM

	Lm	W	Lm/W
30S	3176	25	127
50S	5319	40	132
80S	9692	70	138

FINISH Bronze, White, Black

SENSOR Photocell, Motion

WALL PACKS

PERFORMANCE | CCT | SPECS

OWF4
LED WALL PACK



DLC LISTED PREMIUM

	Lm	W	Lm/W
40S	5558	43	129
60S	8337	65	129
80S	11116	86	129

FINISH Bronze, Black

SENSOR 12V Socket, None

EMERGENCY 8W, None

OWF5
LED WALL PACK



DLC LISTED PREMIUM

	Lm	W	Lm/W
40S	5826	40	151.5
100S	14220	100	149.4
150S	23246	150	164.6

FINISH Bronze

SENSOR 12V Socket

EMERGENCY None , 4W, 9W, 16W

All performance data are based on **4000K** CCT, Medium Wattage (if selectable).
For the most up-to-date information, see product spec-sheets available online.

WALL PACKS

PERFORMANCE | CCT | SPECS

OWG4
LED WALL PACK



DLC LISTED PREMIUM

	Lm	W	Lm/W
100S	10517	78	134

FINISH White

SENSOR Photocell

EMERGENCY 8W, None

OWG5
LED WALL PACK



DLC LISTED PREMIUM

For Near and Mid Throw only

	Lm	W	Lm/W
60S	8185	47	173
80S	10035	63	158
120S	14458	92	158

Based on Mid Throw

FINISH Bronze

SENSOR Photocell with optional 12V Socket

EMERGENCY 9W, None

OWP2
FULL CUT-OFF LED WALL PACK



DLC LISTED PREMIUM

	Lm	W	Lm/W
60S	7536	47	162
100S	12650	77	164

Based on Type III Distribution

FINISH Bronze

SENSOR Photocell with optional 12V Socket

EMERGENCY 9W, None

OPTICS Type II/III/IV

OWR3
LED WALL PACK



	Lm	W	Lm/W
30W	3643	30	123

CCT: 50K

FINISH Bronze

SENSOR Photocell (Standard)

OWR4
LED WALL PACK



DLC LISTED PREMIUM

	Lm	W	Lm/W
15W	2003	15	135

	Lm	W	Lm/W
20S	2160	14.3	153

FINISH Bronze

SENSOR Photocell (Standard)

EMERGENCY *15W / None

**15W: Only available with emergency option;*
20W: Not available with emergency option

OWT
HALF MOON LED WALL PACK



DLC LISTED PREMIUM

	Lm	W	Lm/W
80S (Down)	10288	62	165
80S (Up/Down)	10290	62	165

Based on Type III Distribution

FINISH Bronze

SENSOR Photocell with optional12V Socket

EMERGENCY 9W, None

OPTICS Type III/IV/V

NETWORK LIGHTING CONTROLS



Simplify Your Life with NICOR Network Lighting Controls

3 Levels of Lighting Control



NLC ZONE CONTROLLERS

NLCPS1
3A Power Pack w/ 12V Output



NLCPC1
20A Zone and Plug Load Controller



NLCPPA104SB1
20A Zone and Plug Load Controller w/ 12V + ECO



NLCPC2
3A Zone Controller



NLCEMUL924
Emergency Lighting Controller



NLC SENSORS

NLCSPCW1WH
Ceiling Mount Sensor
PIR / Daylight Harvesting



NLCSPCWNBWH
Non-Bluetooth Sensor
PIR / Daylight Harvesting



NLCSPSS1WH
Snap-in Sensor
PIR / Daylight Harvesting



NLCBCS107C1
Battery Powered Ceiling Sensor
PIR / Daylight Harvesting

NLCCS107DB1
Line Voltage Occupancy Sensor
PIR / Ultrasonic / Daylight Harvesting



NLCEFS107EA0
12V Dual-Tech Ceiling Eco Sensor
PIR / Ultrasonic / Daylight Harvesting



NLCSPEW1WH-LHW
End-Mount Sensor with Lens
PIR / Daylight Harvesting



NLCSPEJ1WH-LHW
3.5mm Sensor with Lens
PIR / Daylight Harvesting



NLC SWITCHES

NLCW31WH
3-Button Wireless Dimming Switch

NLCW51WH
5-Button Wireless Dimming Switch w/ 3-Scenes

NLCWP1013SA0
3-Key Line Voltage BLE Switch



NLCWP1017SA0
7-Key Line Voltage BLE Switch w/ 4-Scenes



NLCIWS102B1
4-Button Switch w/ PIR Sensor



NLCDWS102B1
4-Button Switch w/ PIR + Ultrasonic Sensor



NLC OUTDOOR CONTROLS

NLCEFS106-WHBL
Plug and Play High Bay Long-Range Outdoor Sensor with Lens



NLCWPPA102AUXWC1
Plug and Play Long-Range Outdoor Node



NLCCR02WENCL
Long-Range Astronomical Clock / Extender USB Dongle Outdoor Enclosure



NLC ACCESSORIES

HBCSOCKETADAPT1
3.5mm to 3 Pin Adapter



NLCWSC06W
3.5mm to 3 Pin Outdoor Adapter



NLCWP1WH
Wall-Mount Switch Base with Faceplate

NLCSC1
6.5ft Plenum rated Sensor Cable



NLCSC2
6.5ft Plenum rated Sensor Cable with Connector



H12V2ADJARM1WH
Adjustable 3.5mm Adapter



NLCSPCMOUNT1
Ceiling Mount for Sensor



H12VSOCKET
3.5mm socket



NLCCR01RTC
Real Time Clock



NLCE1
Energy Monitor + Real Time Clock



NLC SENSOR LENSES*

NLCLHN1WH
77° Beam Angle Lens



NLCLMW1WH
103° Beam Angle Lens



Compatible with
NLC**SPEW**1WH-LHW *and* NLC**SPEJ**1WH-LHW

Explore a wide range of products with NICOR® brochures and catalogs to uncover additional lighting solutions.



Scan QR for the **LATEST** Brochure

Warehouse Locations

Albuquerque, NM
Buford, GA
Roseville, CA

T. 800.821.6283
F. 800.892.8393
E. sales@nicorlighting.com

2200 Midtown Pl. NE
Albuquerque, NM 87107 USA
www.nicorlighting.com

Scan QR for the latest
Quick-Reference Guide

7 67706 16376 6

LIT-QRG
20261020

©2026 NICOR® • ALL RIGHTS RESERVED