
NICOR®

NLC Brochure



Simplify your life with NICOR Network Lighting Controls

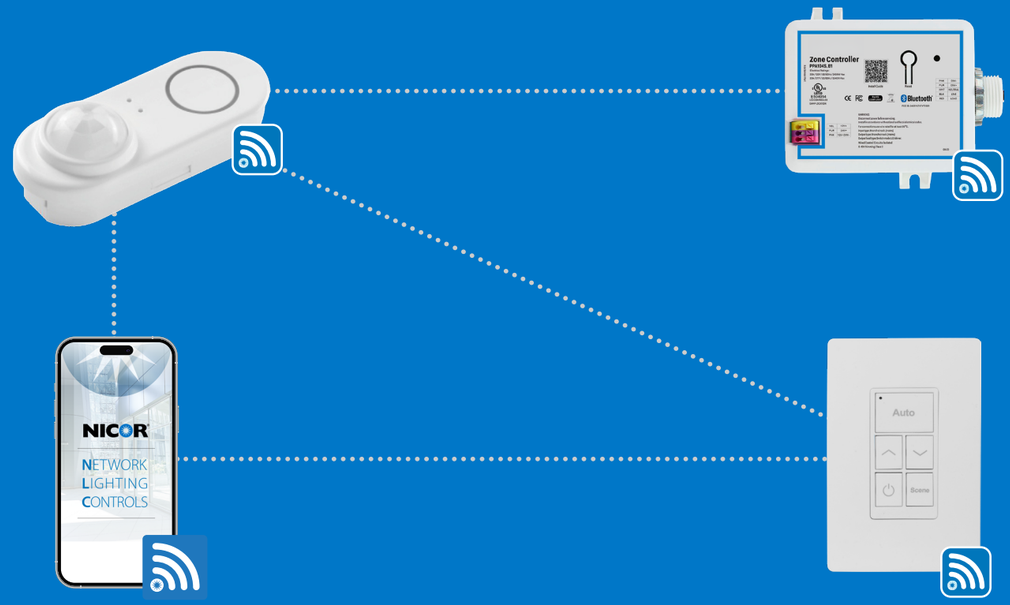

NICOR Network Lighting Controls (NLC) use Bluetooth® Low Energy Mesh 4.2/5.0 protocols to provide either group or individual luminaire control. Together with sensors, wall switches, battery packs, and controller nodes, this wireless control system operates via the NICOR NLC App. Commissioning can be completed quickly and easily without a gateway using the NICOR NLC App on any smart mobile devices. The mesh network allows wireless communication between devices up to a distance of 100 feet or more and eliminates the need for Internet access. The NICOR NLC App uses data encryption for network security, storing configuration settings for each device in encrypted QR codes. Access to each network device is restricted without the QR code. NICOR is proud to uphold the gold standard for cybersecurity, compliant with UL 1376. Additionally, NICOR was among the first platforms listed to DLC's Networked Lighting Controls (NLC5).

Device Security
Uses **128-bit encryption** for its secure mesh network.

Easy Updates
Wireless technology allows you to **securely update your system.**

Stay Secure
All NLC components meet UL's Gold level cybersecurity standards.

3 Levels of Lighting Control


Single Luminaire


Zone


Building



The NLC system meets UL's Gold (1376) level IoT security rating to protect each connected device on the network. The Bluetooth Low Energy (BLE) Mesh acts as a localized network for superior protection from outside sources. Each device on the Mesh network acts as a node on the system acting independently from one another for added security. Data transmission between devices is secured with 128-bit data encryption protocols, eliminating the need for a hub, gateway, or internet connection. Every NLC component is inherently secured right out of the box; no work or setup required. Whether you're in the design or remodel phase, NICOR's Network Lighting Controls system is designed to fit any new or existing framework with added security measures.



Commercial Grade Lighting Controls Systems for Everyone

Networked lighting control systems consist of a smart network comprising of luminaries and control devices, each with its own address and sensors that enables them to send and receive data. The demand for these systems is fueled by three main benefits.

Take Control

NICOR's NLC app provides an intuitive, easy-to-use interface to control the full assortment of NLC components. Available on Android and iOS.

System Ready

NICOR's Network Lighting Controls system is designed with simple scaling solutions in mind. All devices are compatible with new and existing framework.

Benefits

Get control of your energy usage! Create comfortable, well-lit spaces with significant energy savings.

Stay Protected


The NLC system achieves UL Gold (1376) level protection and 5perates on a localized 2data-encrypted mesh network for added security.

Features

With daylight harvesting, occupancy settings and scheduling built in, energy savings come standard.

Flexible Solutions

Simple scaling solutions to easily add controls to new or existing networks with downward compatible software updates while maintaining seamless, uninterrupted operation.

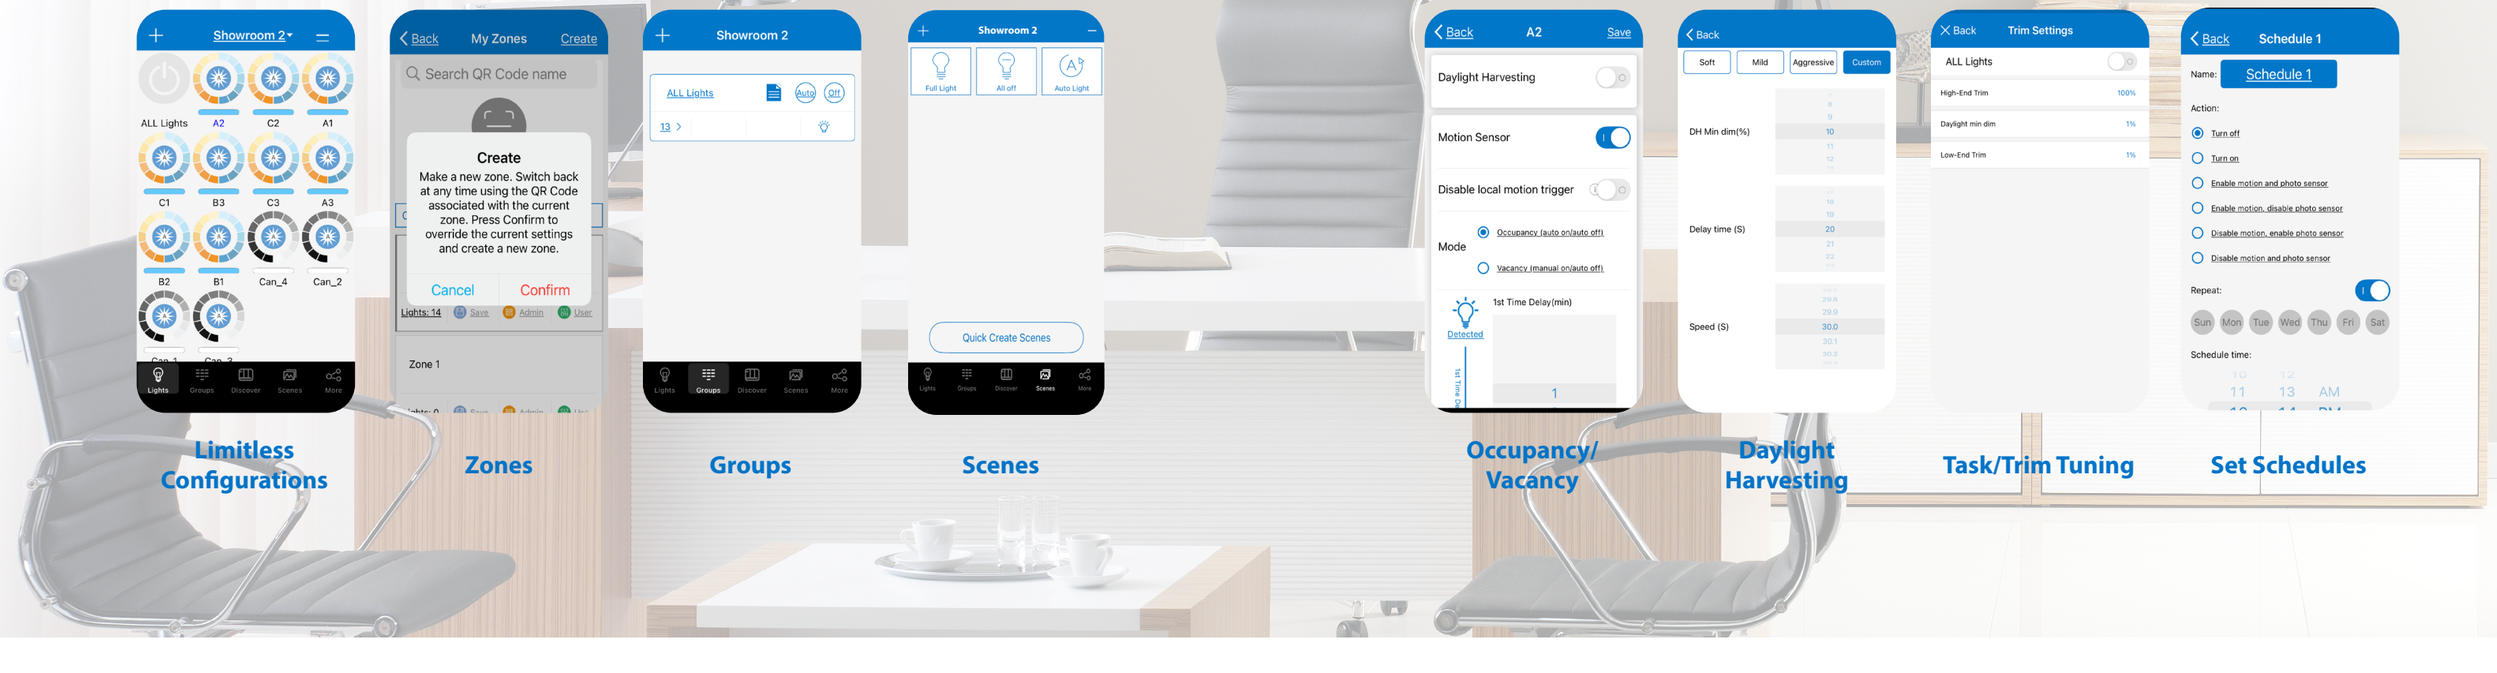

Limitless Configurations
Each individual NLC luminaire or device acts independently from the next. This allows for a limitless combination of settings and features to meet any application requirement.

Zones
NLC Luminaires can be grouped together in unlimited configurations within zones. The NLC Network can accommodate unlimited zones with the ability to scale up to provide coverage for entire sites. Each zone can control up to 100 devices.

Groups
Create groups of luminaires or devices that share similar settings to quickly configure rooms or spaces. Integrate groups within zones for easy scaling with no limit to the number of groups that can exist.

Scenes
Create preset lighting scenes within the NLC app to apply specific brightness and color temperatures stored in the NLC network. Scenes can be controlled with the app or NLC connected wall switches.

Occupancy/Vacancy
Completely adjustable, dual-time delays with light level reduction can help save energy in unoccupied rooms/zones. Settings can easily be adjusted using the NLC App.

Daylight Harvesting
Continuous dimming technology automatically adjusts light levels while factoring in the natural lighting in the space. This helps provide energy savings while reducing the need for artificial lighting during daylight hours.

Task/Trim Tuning
Light levels can be adjusted to match predetermined visual requirements of a given space. Each NLC enabled luminaire can be adjusted to limit its maximum lumen output to save on energy costs.

Set Schedules
Set-up your lighting system according to your schedule. Create simple on/off automations at certain times of the day or week to eliminate unnecessary energy consumption.



Zone & Emergency Controllers

Inline and wireless Bluetooth zone and emergency controllers that install directly to any 1/2-inch knockout




Ceiling & Integrated Sensors

Energy saving sensors offer daylight harvesting and various occupancy controls



High Bay & Outdoor Controls

Outdoor control nodes and sensors, and indoor high-bay sensors with multiple lens options

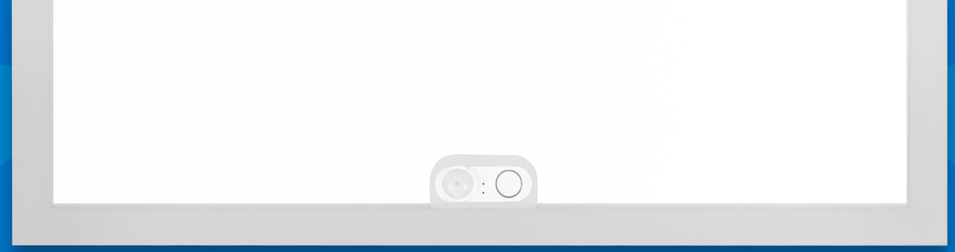







Control Switches

Wireless and line-voltage switches for on/off, dimming, and scene control



Accessories

Mounts, adapters, and real time clock devices to complete your NLC system




NLC Enabled Fixtures

Indoor and outdoor fixtures that integrate seamlessly with the NICOR NLC system

Load Controllers

Load & Emergency Controllers

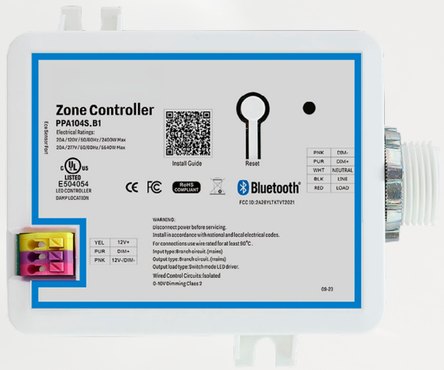

NLC**PPA104SB1**



NLC**PC2**



NLC**PS1**



NLC**EMUL924**

ZONE & PLUG LOAD CONTROLLER

Bluetooth zone controller that features a 20A relay for controlling higher capacity loads than standard fixture controllers.

- Operates at 20A (max) load at 120/277V
- Features a 0-10V dimming capability up to 48.5mA
- 12V output
- Can be secured directly to any ½ inch knockout
- RJ45 connector for connection to the NLCEFS107EA0

RoHS COMPLIANT · UL LISTED · DLC LISTED · IP20 · 5 YEAR WARRANTY

FIXTURE CONTROLLER

A Bluetooth wireless fixture controller that seamlessly converts any standard 0-10V luminaires into a wireless controlled fixture.

- Operates at 3A (max) load at 120/277V
- Provides a 0-10V dimming capability to luminaires
- Compatible with NLCSPCWNBWH
- Can be secured directly to any ½ inch knockout

RoHS COMPLIANT · UL LISTED · DLC LISTED · IP20 · 5 YEAR WARRANTY

POWER PACK

A non-Bluetooth power pack that supplies 12V power to NLC sensors, such as the NLCSPCW1WH, in fixtures without a 12VDC output driver.

- Operates at 3A (max) load
- 12V output
- Powers the NLCSPCW1WH ceiling mount sensor
- Can be secured directly to any ½ inch knockout

RoHS COMPLIANT · UL LISTED · DLC LISTED · IP20 · 5 YEAR WARRANTY

EMERGENCY CONTROLLER

An emergency lighting controller that sends a wireless signal to controlled luminaires when normal building power has been interrupted to override control inputs.

- Meets UL924 requirements
- Works seamlessly with NLCPPA104SB1, NLCPC1, and NLCPC2
- Compatible with any NLC Bluetooth LED drivers
- Can be secured directly to any ½ inch knockout


RoHS COMPLIANT · UL LISTED · DLC LISTED · IP20 · 5 YEAR WARRANTY



Ordering code: **NLCSPSS1WH**



Ordering code: **NP**

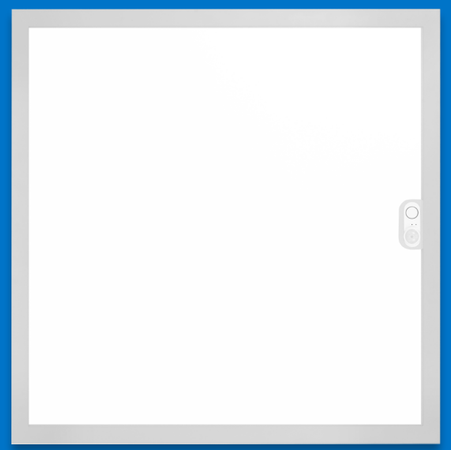

Ordering code: **NLCSPSS1WH**

Integrated Sensors

Integrated sensors, incorporated during manufacturing, are seamlessly integrated into LED lighting systems. These sensors are meticulously designed to operate in harmony with the lighting setup, ensuring optimal performance and reliability. Their compact design makes them ideal for space-constrained environments, commonly found in residential, commercial, and industrial settings. Integrated sensors offer benefits like ease of use, reduced installation and maintenance costs, and enhanced reliability due to their tailored fit within the lighting system.

Built-In Design

Integrated sensors are incorporated into the LED lighting fixture during the manufacturing process. These sensors are designed to work as a cohesive part of the lighting system, ensuring optimized performance and reliability.

Enhanced **Reliability**

As part of the original design, integrated sensors are less prone to installation errors and compatibility issues. More reliable as they are designed and tested to work seamlessly with the LED fixture.

Space Saving

By being part of the fixture, integrated sensors can help save space and maintain a sleek, compact design that can be crucial in applications with limited space.

Field-Installable

Field-installable sensors, conversely, are added to LED lighting systems after manufacturing, providing flexibility for customization and upgrades. These sensors are installed on-site to meet specific lighting requirements, offering adaptability to various environments and needs. Commonly used in retrofitting projects or environments demanding customized lighting solutions, field-installable sensors are ideal for applications that demand specific adjustments and ongoing adaptability in LED lighting systems.

Flexible Integration

Field-Installable sensors can be tailored to the specific needs of the application, allowing for more on-site adjustments and customization. They can be installed, configured, and calibrated to fit the environment.

Easy **Upgradability**

Field-installable sensors can be easily replaced or upgraded without changing the entire lighting fixture to accommodate technological advancements, specific field requirements, or changing conditions.

Customizable Control

These sensors can be tailored to specific operational conditions, such as varying occupancy patterns or specific lighting needs.



NLC**SPC**WNBWH

Non-Bluetooth Sensor

(only works with NLCPC2)



NLC**SPC**W1WH

Ceiling Mount Sensor



NLC**SPSS**1WH

Bluetooth PIR Sensor

Indoor Sensors

BLUETOOTH Line-Voltage Dual-Tech Area Sensor

A line-voltage, Bluetooth dual-tech occupancy sensor that combines PIR and ultrasonic technologies to provide high accuracy and wide coverage. It also features integrated daylight harvesting. Commissioned via the NLC app.

- 0-10V dimming 48.5mA
- Dual-Tech PIR + Ultrasonic technology provides high accuracy and wide coverage
- Wireless Bluetooth® connection to other NLC devices
- 6A (max) Output Current



NLC**CS107D**B1

BLUETOOTH Snap-In PIR Sensor

For Sensor-Ready Fixtures

A low-voltage Bluetooth wireless PIR/Daylight sensor designed exclusively for the NICOR NLC System making it perfect for your Luminaire Level Lighting Controls (LLLCs) needs.

- Constructed from the highest-rated fire retardant material
- Easy installation and operation, ideal for retrofit applications
- For optimal performance, ensure retrofit fixtures are 0-10V
- Offers 360° coverage at heights of 18ft



NLC**SPSS**1WH

BLUETOOTH Battery Powered Area Sensor

A battery powered, Bluetooth wireless ceiling mount sensor for use with the NLC wireless network system. It provides occupancy sensing and Daylight Harvesting. The NLCBCS107C1 is configured with the NLC app.

- Easy Installation with multiple mounting options
- Up to 10 year battery life (Battery not included)
- PIR occupancy sensing + Daylight Harvesting
- Occupancy/Vacancy sensor control



NLC**BCS107**C1

NON-BLUETOOTH Ceiling Sensor

For Use with the NLCPC2 Fixture Controller

A low-voltage PIR occupancy sensor that pairs with the NLCPC2 to bring Luminaire Level Lighting Controls (LLLCs) to 0-10V fixtures. Its 360° coverage at mounting heights of 8–15 ft makes it a cost-effective choice for indoor office spaces.

- 360° PIR coverage at heights of 8–15 ft
- 12V input, powered by the NLCPC2 controller
- Recessed ceiling mount with the NLCSPCMOUNT1
- Fire-retardant plastic housing (UL 94-V0)



NLC**SPCWNB**WH

BLUETOOTH Low-Voltage Area Sensor

A low-voltage, dual-tech ceiling mount room sensor that combines PIR and ultrasonic technologies to provide high accuracy and wide coverage. It is equipped with technology to maximize detection while reducing false-ON triggers. The NLCEFS107EA0 sensor incorporates daylight harvesting and is intended to operate with a luminaire controller NLCPPA104SB1.

- Powered by luminaire controllers NLCPPA104SB1
- 600 sq ft room coverage
- Requires NLCRTP and Cat5 cables
- Dual-tech PIR +Ultrasonic technology provides high accuracy coverage



NLC**EFS107E**A0

BLUETOOTH Ceiling Mount Sensor

For NICOR Commercial Downlights

A low-voltage Bluetooth wireless PIR/Daylight sensor designed for the NICOR NLC System. Its 360° coverage at heights up to 15 ft makes it ideal for Luminaire Level Lighting Controls (LLLCs) in indoor office spaces. Commissioned via the NLC app.

- 360° PIR coverage at heights up to 15 ft
- Bluetooth 4.2/5.0 mesh, up to 100 ft range
- Pairs with 12VDC output drivers or the NLCPS1
- Recessed ceiling mount with the NLCSPCMOUNT1



NLC**SPCW**1WH

Outdoor Controls & High Bay Sensors



NLC**EFS106**-WHBL

- Designed for Luminaire Level Lighting Control (LLLC) applications, with performance optimized for outdoor environments.
- Combines photocell control, passive infrared (PIR) motion detection, and long-range Bluetooth communication in a single sensor.
- Housed in a UV-resistant black nylon enclosure for durability and reliable outdoor operation.



NLC**WPPA102AUXW**C1

- Designed for seamless integration with wet-listed sensors in outdoor lighting control systems.
- Features an enhanced Bluetooth antenna with signal transmission distances of up to 328 ft (100 m).
- Ideal for outdoor applications where extended communication range between system nodes is required.



NLC**SPEJ**1WH-LHW

- Low-voltage Bluetooth wireless PIR/Daylight sensor with a 3.5mm Jack/AUX connector.
- Plug-n-play installation in fixtures with a 12V 3.5mm jack sensor socket.
- 360° coverage at heights from 20 ft to 40 ft, with a 90° beam angle.



NLC**CR02WENCL**

- IP65-rated waterproof enclosure designed to protect the NICOR NLC USB dongle in outdoor environments.
- Provides Real-Time Clock functionality, Bluetooth signal boosting, integrated power, and surge protection for reliable operation.
- Extends Bluetooth communication range up to 1,640 ft (500 m), improving network coverage and overall system performance.

Switches



NLC**DWS102**B1



NLC**IWS102**B1



NLC**W31WH**



NLC**W51WH**



NLC**WP1017S**A0



NLC**WP1013S**A0

SENSOR
SWITCH

An occupancy sensor switch that uses PIR and Ultrasonic technology for accurate motion detection, automatically controlling lighting based on occupancy and ambient light levels.

- Operates at 6A (max) load at 120/277VAC
- Dual-tech occupancy sensing and photocell control
- On, Off, Dim Up, and Dim Down via Bluetooth mesh
- Bluetooth 5.0 for wireless connectivity, up to 100 ft range

Note: the NLCDWS102B1 model does not provide 0-10V dimming connections.

SENSOR
SWITCH

A Bluetooth switch with Passive Infrared (PIR) technology to detect occupancy and automatically control lighting based on motion and ambient light levels, based on motion and ambient light levels.

- Operates at 6A (max) load at 120/277VAC
- PIR occupancy sensing and photocell control
- On, Off, Dim Up, and Dim Down via Bluetooth mesh
- Bluetooth 5.0 for wireless connectivity, up to 100 ft range

Note: the NLCIWS102B1 model does not provide 0-10V dimming connections.

WIRELESS
SWITCH

A 3-button battery powered switch providing dimming functionality. It can be wall-mounted using a Decora-style wall plate (sold separately) or used as a portable remote.

- Operates on a 3V CR2032 battery
- On, Off, Dim Up, and Dim Down via Bluetooth mesh
- Bluetooth 5.0 for wireless connectivity, up to 100 ft range

WIRELESS
3 Scene SWITCH

A 5-button battery powered switch providing 3 separate scenes, as well as dimming functionality. It can be mounted to a flat surface or a switch box (with a wall plate), or used as a handheld remote.

- Operates on a 3V CR2032 battery
- Up to 3 programmable scenes
- On, Off, Dim Up, and Dim Down via Bluetooth mesh
- Bluetooth 5.0 for wireless connectivity, up to 100 ft range

LINE VOLTAGE
4 Scene SWITCH

A 7-button line-voltage switch providing 4 separate scenes, as well as dimming functionality.


- 120/277VAC
- 4 programmable scenes
- On, Off, Dim Up, and Dim Down via Bluetooth mesh
- Bluetooth 5.0 for wireless connectivity, up to 100 ft range

LINE VOLTAGE
SWITCH

A 3-button line-voltage switch providing dimming functionality.

- 120/277VAC
- On, Off, Dim Up, and Dim Down via Bluetooth mesh
- Bluetooth 5.0 for wireless connectivity, up to 100 ft range


NLC Accessories



Wall Plate
NLC**WP**1WH

Wireless Switch Wall Mount/Wall Plate

- Provides wall mount for 3 button and 5 button wireless switches (NLCW31WH and NLCW51WH).
- Docking Station for 3 and 5 button wireless switches.

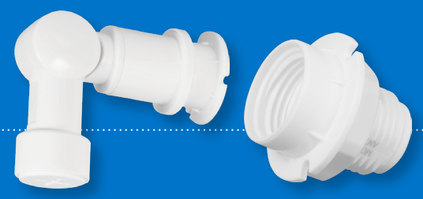

Mounting Accessories
H12V2**ADJARM**1WH | H12V**SOCKET**

Optional low-voltage, in-line socket mounts that provides mounting capability for compatible sensors.

- Requires a 3.5mm jack to operate
- Can be secured to any ½ inch knockout
- Adjustable mounting arm can be adjusted up to 90°



Socket Adapters
HBC**SOCKETADAPT1** | NLC**WSC06W**

Socket adapter to convert a 3-pin connector into a 3.5mm jack connector.


- Enables high bays with a 3-pin connector to utilize NLC controls
- Simple plug-and-play design for quick and easy installation
- Manufactured with high-quality materials to ensure better performance and durability



Real Time Clock / Energy Monitoring
NLC**CR01RTC** | NLC**E1**

Energy monitoring dongle designed to provide a Real Time Clock (RTC) function and an optional energy monitoring function.


- Useful for time syncing devices within a zone
- Works up to 15-minute intervals
- Only one (1) NLCE1/NLCCR01RTC needed per zone

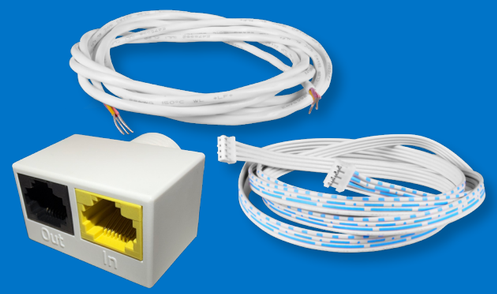

Sensor Cables/Connectors
NLC**SC1** | NLC**SC2** | NLC**RTP**

Cable connectors and plenum-rated sensor cables that meet NLC sensor needs.

- NEC code compliant plenum-rated sensor cables
- Available in both standard and connector-equipped type for non-bluetooth sensor
- Connectors for converting RJ45 to PH2.0 connections



Ceiling Mount
NLC**SPCMOUNT1**

Ceiling mount accessory that allows for a more flexible on-site installation for sensors

- Recessed ceiling mount designed to work with the SPC sensors
- Adjustable spring-loaded retention tabs for a secure fit
- Die cast material with a ceiling cut diameter of 1.60in (41mm)

NICOR NLC Enabled Fixtures

INDOOR



CLR (v3)

ORDERING CODE:
NLCDOWN1


NLC**SPCW1WH**


NLC**SPCMOUNT1**


NLC**PS1**



HBL (v4)

ORDERING CODE:
NLCIND3.5A


NLC**SPEJ1WH-LHW**


NLC**ADJARM1WH**



TGL (v4S)

ORDERING CODE:
NLCSPSS1WH


NLC**SPSS1WH**




HBC (v5, v6)

ORDERING CODE:
NLCSPEJ1WH-LHW, HBCSOCKETADAPT1


NLC**SPEJ1WH-LHW**


HBC**SOCKETADAPT1**



VT (v4, v5)

ORDERING CODE:
SENSORMWBT1KIT


SENSORMWBT1KIT
*Optional factory install on VTv4 Sensor Ordering Code: VT4454SUNVS8Nx




CDG

ORDERING CODE:
NLCSPCW1WH, NLCSPCMOUNT1


NLC**SPCW1WH**


NLC**SPCMOUNT1**



LSL (v1, NP Sensor-Ready)

ORDERING CODE:
NP


(Factory Installed)



TAC (v3S)

ORDERING CODE:
NLCSPSS1WH


NLC**SPSS1WH**



HBN (v1)

ORDERING CODE:
NLCSPEJ1WH-LHW


NLC**SPEJ1WH-LHW**



LSC (v2)

ORDERING CODE:
SENSORMWBT1KIT


SENSORMWBT1KIT
*Optional factory install on LSCv2 Sensor Ordering Code: LSC2xxUS8Nx



HML (v1, v3)

ORDERING CODE:
NLCSPEJ1WH-LHW


NLC**SPEJ1WH-LHW**



WPA (v1)

ORDERING CODE:
SENSORMWBT1KIT



SENSORMWBT1KIT
*Optional factory install on WPAv1Sensor Ordering Code: WPA1445SUS8WHNx



HML (v4)

ORDERING CODE:
NLCSPEJ1WH-LHW


NLC**SPEJ1WH-LHW**



LSC28F

ORDERING CODE:
SENSORMWBT1KIT


SENSORMWBT1KIT
*Optional factory install on LSC28F Sensor Ordering Code: LSC28F80SUS8Nx



WPC (v4, Assembly)

ORDERING CODE:
WPC4xxUS8WHMx, NLCSPSS1WH


NLC**SPSS1WH**




WPP (v1)

ORDERING CODE:
SENSORMWBT1KIT


SENSORMWBT1KIT
*Optional factory install on WPPSensor Ordering Code: WPP1440SUS8Nx

OUTDOOR



OUC5

ORDERING CODE:
NLCEFS106-WHBL


NLC**EFS106-WHBL**



OAL5

ORDERING CODE:
NLCEFS106-WHBL, NLCWSC06W

NLC**EFS106-WHBL**

NLC**WSC06W**

OAL4

ORDERING CODE:
NLCEFS106-WHBL, NLCWSC06W

NLC**EFS106-WHBL**

NLC**WSC06W**

OUC4 (Assembly)

ORDERING CODE:
OUC4xUNVSxS, NLCEFS106-WHBL, H12V3ADJARM1PBG

NLC**EFS106-WHBL**

H12**V3ADJARM1PBG**

Integrated Sensors



SENSOR-READY CENTER BASKET LED TROFFER

TAC3S

Series	Version	Size	Wattage	Voltage	CCT	CRI	Sensor	Emergency *(Optional)*
TAC	3	**22** (2' x 2')	**25S** (15/20/25W)[1]	**U** (120-277V)	**S** (35/40/50)	**8** (>80)	**S** (Sensor Socket)[3]	<BLANK>
		24 (2' x 4')	**50S** (30/40/50W)[2]			**9** (>90)		**E1** (4.5W)
								E2 (8W - MTO)
								E3 (8W - QS)

Specifications and dimensions subject to change without notice.
1)2x2 model only 2)2x4 model only 3)Ordering code NLCSPSS1WH for field installable NLC sensor



SENSOR-READY SELECTABLE LED TROFFER

TGL4S

Series	Version	Size	Wattage	Voltage	CCT	CRI	Sensor	Emergency *(Optional)*
TGL	4	**14** (1' x 4')	**30S** (20/25/30)	**U** (120-277V)	**S** (35/40/50)	**8** (>80)	**S** (Sensor Socket)[1]	<BLANK>
		22 (2' x 2')	**30S** (20/25/30)			**9** (>90)		**E1** (4.5W)
		24 (2' x 4')	**50S** (30/40/50)					**E2** (8W - MTO)
								E3 (8W - QS)

Specifications and dimensions subject to change without notice.
1)Ordering code NLCSPSS1WH for field installable NLC sensor



WRAPS

WPC4

Series	Version	Length	Wattage Selectable	Voltage	CCT	CRI	Finish	Sensor	Emergency *(Optional)*
WPC	4	**2** (2 ft)	**25WS**(12/16/20/25W)	**U (120-277V)**	**S** (35-50/65K)	**8** (80+)	**WH** (White)	**M**(Sensor Ready)[1]	- (none)
		4 (4 ft)	**46WS**(24/31/38/46W)					- (none)	**E1** (EM Backup)[1]

Specifications and dimensions subject to change without notice.
1)4W battery for 4 ft model only. 2) Ordering code NLCSPSS1WH for field installable NLC sensor

Next Steps

1

Preparation Work
- Define Control Narrative and SOO
- Install lights and test power

2

Set Lights, Groups and Scenes
- Create Zones/Generate QR Code
- Connect Lights to App
- Group Lights Together
- Create Scene Settings
- Add a Device Control

3


Set Sensor Lights
- Fix sensor parameters
- Configure light linkage levels
- Set Auto Light levels
- Create Templates

4

Project Delivery
- Share QR Code

Download

NICOR's NLC App

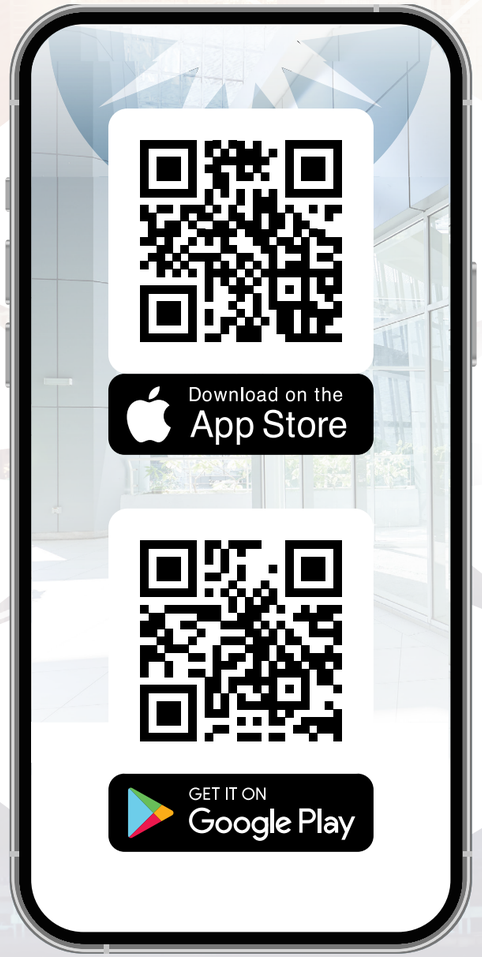



Need assistance in determining the best solution or need a layout of the lighting controls on your plans?

If your project requires a lighting controls layout, our application engineers can provide recommended solutions and floor plans showing what NLC enabled luminaires and control components to use for your project. To request assistance visit www.NICORLighting.com/Network-Lighting-Controls and submit a Lighting Controls Layout Request with either .PDF or .DWG drawings of the space. For questions contact engineeringqa@nicorlighting.com

The Making of a Layout

Our application engineers will help you satisfy your customer's requirements; from specific lighting control solutions to working space requirements and more. Your customized report provides an in-depth look at how NICOR's NLC solutions are the perfect fit for any project.

- Exporting layout drawings as .DWG or .PDF
- Layouts showing placement on drawings, descriptions of products used with quantities
- Solution system specifications provided

Please note that NLC Layout can vary depending on the complexity of the project. Standard turnaround times:

Small Scale (less than 5,000sq ft)	:	*2 business days*
Medium Scale (5,000 to 50,000sq ft)	:	*3-4 business days*
Large Scale (above 50,000sq ft)	:	*4-5 business days*

Requests with any non-NICOR fixtures are subject to longer turnaround times to ensure compatibility with the NLC control system.



7 67706 19760 0

Warehouse Locations:

Albuquerque, NM
Buford, GA

Contact NICOR Lighting:

800.821.6283
www.nicorlighting.com
2200 Midtown Pl. NE
Albuquerque, NM 87107 USA

NICOR®

© 2026 NICOR® • ALL RIGHTS RESERVED

LIT-NLC-BR 20261030