



## Quick-Reference Guide

# DOWNLIGHTS



## RECESSED

### PERFORMANCE

### CCT

### SPECS

#### DCG LED RECESSED GIMBAL DOWNLIGHT



	Lm	W	Lm/W
4"	545	8	73
5/6"	848	10	82

27K
40K
50K

**FINISH**  
White

**CRI**  
90+

**TILT**  
0° - 35°



#### DCG Select LED RECESSED GIMBAL DOWNLIGHT



	Lm	W	Lm/W
4"	731	7	99
6"	938	9	99



**FINISH**  
White

**CRI**  
90+

**TILT**  
0° - 30°



#### DCR Select LED RECESSED DOWNLIGHT



	Lm	W	Lm/W
4"	729	7.2	101
5/6"	923	9.2	100




**FINISH**  
Smooth, Baffle

**CRI**  
95



#### DEB56 LED RECESSED EYEBALL DOWNLIGHT



	Lm	W	Lm/W
5/6"	971	13	78

27K
30K
40K

**FINISH**  
White

**CRI**  
90+

**TILT**  
0° - 30°



#### DLG LED RECESSED GIMBAL DOWNLIGHT



	Lm	W	Lm/W
2"	678	9	79
4"	612	9	67
5/6"	1034	13	83

27K
30K
40K

**FINISH**  
Black, White, Oil-Rubbed Bronze

**TILT**  
0° - 35°

**HOUSING**  
New Construction, Remodel, ICAT



#### DLR2 LED RECESSED DOWNLIGHT



	Lm	W	Lm/W
2"	638	9	73


27K
30K
40K

**FINISH**  
Smooth, Baffle

**TRIM**  
Oil-Rubbed Bronze, White

**OPTICS**  
Beam Patterns

**HOUSING**  
New Construction, Remodel, ICAT



#### DLR3 Select LED RECESSED DOWNLIGHT



	Lm	W	Lm/W
3"	811	7.5	108



**FINISH**  
Baffle

**TRIM**  
White

**CRI**  
95



## RECESSED

### PERFORMANCE

### CCT

### SPECS

#### DLRv6 LED RECESSED DOWNLIGHT




	Lm	W	Lm/W
4" 700lm	735	8	93
5/6" 900lm	934	10	91
5/6" 1200lm	1231	14	89



**FINISH**  
Smooth, Baffle

**TRIM**  
Black, Black Baffle, Bronze, Nickel

**FRAME**  
New Construction



#### DLRv7 LED RECESSED DOWNLIGHT




	Lm	W	Lm/W
4" 900lm	764	6.5	117.9
5/6" 1500lm	1264	11.6	108.7



**FINISH**  
Smooth, Baffle

**TRIM**  
Black, Black Baffle, Bronze, Nickel, Nickel Baffle

**FRAME**  
New Construction



#### DQR/DLQ SQUARE LED RECESSED DOWNLIGHT



	Lm	W	Lm/W
3"	552	9	62
4"	681	11	60
5"	1039	16	66
6"	1050	16	68

27K
30K
40K

**FINISH**  
Baffle

**TRIM**  
Black\*, White

**CRI**  
90



\*Available only for DQR6

#### DQR2 SQUARE LED RECESSED DOWNLIGHT




	Lm	W	Lm/W
2"	628	9	71

27K
30K
40K

**FINISH**  
Black, White, Nickel, Oil-Rubbed Bronze

**OPTICS**  
Beam Patterns

**HOUSING**  
New Construction, Remodel, ICAT



#### DQR2-AA SQUARE ADJUSTABLE LED RECESSED DOWNLIGHT




	Lm	W	Lm/W
2"	674	9	77

27K
30K

**FINISH**  
Black, White, Nickel, Oil-Rubbed Bronze

**OPTICS**  
Beam Patterns

**TILT**  
0° - 30°



#### DQR4MA Select 4" MULTI-ADJUSTABLE LED RECESSED DOWNLIGHT




	Lm	W	Lm/W
4"	772	8	101



**FINISH**  
White

**TILT**  
0° - 30°

**CRI**  
90+



#### RDN LED RECESSED DOWNLIGHT WITH NIGHT LIGHT




	Lm	W	Lm/W
4"	756	7.4	102
5/6"	975	9.4	103



**FINISH**  
Black, Black Baffle, White, White Baffle

**NIGHT LIGHT**  
2000K

**CRI**  
95+



#### RMP1 3" LED MONOPOINT



	Lm	W	Lm/W
3"	1037	11.7	88.6



**FINISH**  
Black, White

**TILT & ROTATION**  
355° Tilt & 180° Rotation

**CRI**  
90

**OPTICS**  
Beam Patterns



**SURFACE-MOUNT**

PERFORMANCE

CCT

SPECS

**DLFv5**

SUREFIT  
SURFACE-MOUNT  
LED DOWNLIGHT




	Lm	W	Lm/W
8W	675	8	85
10W	787	10	85
12W	971	12	84



**FINISH**  
White

**SHAPE**  
Round, Square, Wall Wash

**TRIM**  
Black, Bronze



**DSEv2**


EDGE-LIT  
SURFACE-MOUNT  
LED DOWNLIGHT



RD	Lm	W	Lm/W
5"	632	10	63
8"	978	13	73
9"	1315	19	69



SQ	Lm	W	Lm/W
4"	631	10	63
6"	951	13	71
9"	1379	19	73



**FINISH**  
White

**SHAPE**  
Round, Square

**CRI**  
90



Scan QR code for PROMO

**DSE Select**

EDGE-LIT  
SURFACE-MOUNT  
LED DOWNLIGHT



RD	Lm	W	Lm/W
5"	627	10	60
8"	966	16	62
9"	1285	18	71

SQ	Lm	W	Lm/W
4"	629	11	59
6"	962	16	62
9"	1243	19	69




**FINISH**  
White

**SHAPE**  
Round, Square

**TRIM\***  
Black, Bronze, Nickel

\*Round Trims only



**DSE 11/15**

EDGE-LIT  
SURFACE-MOUNT  
LED DOWNLIGHT




	Lm	W	Lm/W
11"	1552	16	98
15"	2058	19	108



**FINISH**  
White

**SHAPE**  
Round

**MOUNTING**  
Surface, Pendant



**RCD**

LOW PROFILE  
SURFACE-MOUNT  
LED DOWNLIGHT



	Lm	W	Lm/W
4"	630	10	63
6"	977	65	65



**FINISH**  
White

**CRI**  
90




**RSD**

SURFACE-MOUNT LED  
DOWNLIGHT



	Lm	W	Lm/W
4"	649	11	61
6"	970	16	62
8"	1152	19	62



**FINISH**  
White

**CRI**  
93+



**SURFACE-MOUNT**

PERFORMANCE

CCT

SPECS

**RSD Select**

SURFACE-MOUNT LED  
DOWNLIGHT




	Lm	W	Lm/W
4"	655	11	60
5/6"	999	15	65
8"	1264	19	68



**FINISH**  
White\*, Black,  
Bronze, Nickel

**CRI**  
90



\*8" only available in White

**RSDS-M**

SURFACE-MOUNT  
LED DOWNLIGHT  
WITH PIR MOTION SENSOR




	Lm	W	Lm/W
4"	611	10	63



**FINISH**  
White

**SENSOR**  
65° PIR Sensor



**RSDS-M2**

SURFACE-MOUNT  
LED DOWNLIGHT  
WITH PIR MOTION SENSOR




	Lm	W	Lm/W
6"	1123	14	82



**FINISH**  
White

**SENSOR**  
65° PIR Sensor



**CANLESS**

PERFORMANCE

CCT

SPECS

**CLRv3 Select**

COMMERCIAL LED  
RECESSED DOWNLIGHT




	Lm	W	Lm/W
4"	1137	10	115
6"	1654	18	95
8"	2988	29	102



**FINISH**  
White

**TRIM**  
Black



**CLRv3 Select  
Low Lumen**

COMMERCIAL LED  
RECESSED DOWNLIGHT




	Lm	W	Lm/W
4"	686	8	87
6"	798	9	90
8"	1525	15.5	98



**FINISH**  
White

**TRIM**  
Black



**DGC Select**

LED RECESSED GIMBAL  
DOWNLIGHT




	Lm	W	Lm/W
4"	763	9	87



**FINISH**  
White, Bronze, Black

**TILT**  
0° - 25°



**DGD Select**

GIMBAL RECESSED  
LED DOWNLIGHT




	Lm	W	Lm/W
2"	461	5	97
3"	606	8	77
4"	845	11	75



**FINISH**  
White, Black, Bronze

**CRI**  
90+

**TILT**  
0° - 32°



CANLESS

PERFORMANCE

CCT

SPECS

**DGF Select**  
LED RECESSED FLOATING  
GIMBAL DOWNLIGHT



	Lm	W	Lm/W
4"	766	9	87



**FINISH**  
White, Bronze, Black



**TILT**  
0° - 90°



**DLEv2**  
EDGE-LIT RECESSED  
LED DOWNLIGHT




Scan QR code for PROMO



RD	Lm	W	Lm/W
3"	350	6	58
4"	725	11	66
6"	1005	14	72
8"	2441	29	85

SQ	Lm	W	Lm/W
4"	579	8	70
6"	879	11	81



**FINISH**  
White



**SHAPE**  
Round, Square



**TRIM**  
Black, Aged Copper



**RRD**  
2" RECESSED LED  
DOWNLIGHT



	Lm	W	Lm/W
8W	726	8	96
14W	1202	13	94



**STYLES**  
Trim, Trimless



**SHAPE**  
Round, Square




**TRIM**  
Black, White



**REL**  
EDGE-LIT LED  
DOWNLIGHT



	Lm	W	Lm/W
4"	680	10	66
6"	921	12	78
8"	1306	18	73



**FINISH**  
White




**SHAPE**  
Round



**TRIM**  
Black, Bronze, Nickel



**OPTICS**  
24°, 60°



**REL Select**  
EDGE-LIT RECESSED LED  
SELECTABLE DOWNLIGHT



RD	Lm	W	Lm/W
3"	587	8	77
4"	710	11	67
6"	943	12	77
8"	1327	18	74

SQ	Lm	W	Lm/W
4"	658	11	62
6"	903	13	72



**FINISH**  
White



**SHAPE**  
Round, Square



**TRIM\***  
Black, Bronze, Nickel



\*Round Trims only except 3"

CANLESS

PERFORMANCE

CCT

SPECS

**RELS-R**  
EDGE-LIT RECESSED LED  
SELECTABLE DOWNLIGHT



RD	Lm	W	Lm/W
4"	710	11	67
6"	943	12	77

SQ	Lm	W	Lm/W
4"	658	11	62
6"	903	13	72



**FINISH**  
Baffled White



**SHAPE**  
Round, Square



**REL-FR**  
FIRE-RATED EDGE-LIT  
LED DOWNLIGHT



	Lm	W	Lm/W
4"	957	11	88
6"	1281	15	88



**FINISH**  
White



**CRI**  
90



**RATING**  
2 Hours Fire Rated



**REL6-UNV**

EDGE-LIT RECESSED  
LED SELECTABLE  
DOWNLIGHT  
UNIVERSAL VOLTAGE



	Lm	W	Lm/W
6"	1102	13	88



**FINISH**  
Smooth, Baffle



**VOLTAGE**  
120-277V (UNV)



SYSTEMS

PERFORMANCE

CCT

SPECS

**DLQ5**  
NEW CONSTRUCTION  
LED DOWNLIGHT SQUARE



	Lm	W	Lm/W
5"	1189	16	75



**FINISH**  
White




**CRI**  
90



**FRAME**  
New Construction



**DLQ5-MA**  
NEW CONSTRUCTION LED  
DOWNLIGHT SQUARE ADJUSTABLE

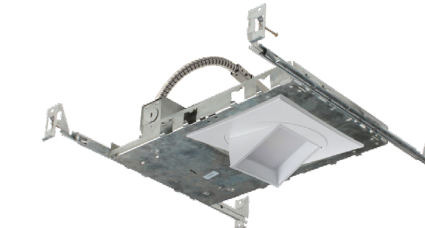

	Lm	W	Lm/W
5"	1070	16	67



**FINISH**  
White



**TILT**  
0° - 83°



**FRAME**  
New Construction



SYSTEMS

PERFORMANCE

CCT

SPECS

DDA

3" SPECIFICATION GRADE DOWNLIGHT SYSTEM




	Lm	W	Lm/W
ADJUSTABLE	1776	21	85
REMODEL	1776	21	85

Based on Wide optic, 3000K CCT


- 27K
- 30K
- 35K
- 40K
- 50K

D-TO-W

**HOUSING**  
Adjustable, Remodel,  
New Construction



**FINISH**  
Smooth, Baffle



**TRIM**  
White, Black, Specular



**SHAPE**  
Round, Square, WW



**LOCATION**  
Wet/Damp Location



**CRI**  
80, 90



**OPTICS**  
Beam Patterns



CDG

MODULAR LED DOWNLIGHT



	Lm	W	Lm/W
4"	2165	24	90
6"	2323	24	96

Based on 36° Medium optic, 3500K CCT, 25W




**REFLECTOR**  
White, Haze, Specular



**CRI**  
94



**OPTICS**  
Medium-Narrow, Medium,  
Wall Wash



**APPLICATION**  
New Construction,  
Remodel



**EMERGENCY**  
4W, 8W



**SENSOR**  
NLC



SPECIALTY

DOOR CHIME KITS

PERFORMANCE

VOLTAGE

SPECS

EDC  
SINGLE-GANG  
ELECTRONIC  
DOOR CHIME



2W

5 VDC

**FINISH**  
White



**BUTTON STYLE**  
Standard (Lighted),  
Round Stucco (SB)



**BUTTON FINISH**  
Stucco Button - Nickel, Bronze



PrimeChime<sup>2</sup>  
ELECTRONIC DOOR CHIME  
VIDEO COMPATIBLE



20W

20 VAC

**FINISH**  
White




**BUTTON STYLE**  
Standard (Lighted),  
Rectangular Deco (DB),  
Round Stucco (SB)



**BUTTON FINISH**  
Deco Button: White, Black,  
Copper, Nickel



Stucco Button: White, Polished  
Brass, Brushed Nickel, Antique  
Brass, Architectural Bronze



**ACCESSORY**  
Remote Strobe Light



PRMC/PRMC-WL  
PRIMECHIME PLUS 2 MINI®  
VIDEO COMPATIBLE




21W

24 VAC

**FINISH**  
White



**BUTTON STYLE**  
Standard (Lighted),  
Rectangular Deco (DB),  
Round Stucco (SB)  
\* Wireless



**BUTTON FINISH**  
Deco Button: White, Black,  
Copper, Nickel



Stucco Button: White, Polished  
Brass, Brushed Nickel, Antique  
Brass, Architectural Bronze



STEP LIGHTS

PERFORMANCE

CCT

SPECS

STP2  
LED STEP LIGHT



	Lm	W
Louvered	27	1
Louvered (PC)	27	1.5
Open Face	57	1
Open Face (PC)	57	1.5

27K

**FINISH**  
White, Black, Oil-Rubbed Bronze



**TRIM**  
Louvered, Frosted



**SENSOR**  
Photocell (PC), None



**LOCATION**  
Wet Location



STW  
WET LOCATION  
LED STEP LIGHT




	Lm	W
Vertical	35	3
Horizontal	75	5

30K

**FINISH**  
White, Black, Bronze



**SHAPE**  
Vertical, Horizontal



**LOCATION**  
Wet Location



# UNDERCABINETS



PERFORMANCE

CCT

SPECS

## NUC Select v5 LED UNDER CABINET



	Lm	W	Lm/W
8"	276	4	76
12"	426	5	81
21"	706	9	82
30"	810	11	73
40"	1159	16	75

Based on 3000K CCT



**FINISH**  
White, Black, Bronze, Nickel



**SIZES**  
8", 12", 21", 30", 40"



**CRI**  
92+



## UCB Select LED UNDER CABINET



	Lm	W	Lm/W
9"	345	5	69
12"	345	5	69
18"	621	9	69
21"	621	9	69
24"	621	9	69
33"	966	14	69
42"	1242	18	69

Based on 3000K CCT



**FINISH**  
White



**SIZES**  
9", 12", 18", 21", 24", 33", 42"



**SWITCH**  
With Switch, Without Switch



**CRI**  
90+



# ARCHITECTURAL LINEARS



PERFORMANCE

CCT

SPECS

## LSA ARCHITECTURAL LED DIRECT/INDIRECT LINEAR



	Lm	W	Lm/W
4'	5568	40	140
6'	7092	51	140
8'	11174	80	140


Based on 4000K CCT

- 35K
- 40K
- 50K

**FINISH**  
White, Black, Satin Clear, Silver, Custom\*



**MOUNTING**  
Pendant, Surface Mount, Aircraft Cable



**SENSOR**  
MW, None



\*Special order available with MOQ order only

## LSE ARCHITECTURAL LED DIRECT/INDIRECT LINEAR



	Lm	W	Lm/W
4'	4501	41	111
8'	8911	81	110

Based on 4000K CCT, 50 Up / 50 Down

- 35K
- 40K
- 50K

**FINISH**  
White, Silver, Custom\*



**MOUNTING**  
Pendant, Wall Mount, Aircraft Cable, Continuous Run



**DISTRIBUTION**  
20 Up/80 Down, 50 Up/50 Down, 100 Down



\*Special order available with MOQ order only

## LSQ ARCHITECTURAL LED DIRECT LINEAR



	Lm	W	Lm/W
4'S	4021	26	155
4'H	6603	51	129
8'	6603	51	129

Based on 4000K CCT

- 35K
- 40K
- 50K

**FINISH**  
White, Satin Clear, Silver, Custom\*



**MOUNTING**  
Pendant, Surface Mount, Wall Mount, Aircraft Cable



**EMERGENCY**  
EMS8, None



\*Special order available with MOQ order only



Ask about our UCB Counter Display

# LINEARS & WRAPS

# VAPORTITES

## LINEARS

### PERFORMANCE

### CCT

### SPECS

### LSC Select LED LINEAR STRIP LIGHT



	Lm	W	Lm/W
8'	9200	61	150




\*Selectable Wattage available on 4' only

**FINISH**  
White




**MOUNTING**  
Pendant, Continuous Run



**SENSOR**  
MW, NLC, None



### LSC2 Select SELECTABLE CCT & OUTPUT LED LINEAR STRIP




	Lm	W	Lm/W
2'	2795	20	144
4'	4135	29	142
8'	9684	68	143



**FINISH**  
White




**MOUNTING**  
Surface, Cable, Hook, Chain



**SENSOR**  
Sensor-Ready



### LSL1-NP TUNABLE LED LINEAR STRIP LIGHT



	Lm	W	Lm/W
2'	2687	20	132
4'	5637	39	146
8'	11125	75	149



**FINISH**  
White



**MOUNTING**  
Cable, Hook and Chain, Pendant



**SENSOR**  
NLC



## WRAPAROUNDS

### PERFORMANCE

### CCT

### SPECS

### WPC3 Select LED LINEAR WRAP



	Lm	W	Lm/W
2'	2593	20	127
4'	5032	40	127



**FINISH**  
White



**CRI**  
80



### WPP LED PRISMATIC WRAP



	Lm	W	Lm/W
4'	5256	31.7	165.8



**FINISH**  
White



**CRI**  
80+



**LENS**  
Prismatic



**SENSOR**  
Ready (MW Optional)



### PERFORMANCE

### CCT

### SPECS

### VT3-20 LED VAPORTITE



	Lm	W	Lm/W
2S	2606	20	130
8H	11637	90	130



**FINISH**  
Light Gray



**MOUNTING**  
Surface Mount  
Cable Suspension



**EMERGENCY**  
4W, 8W



### VT4 LED VAPORTITE



	Lm	W	Lm/W
4'	6623	45	149



**FINISH**  
Light Gray



**MOUNTING**  
Surface Mount  
Cable Suspension



**SENSOR**  
MW, Remote Control



**EMERGENCY**  
8W, 18W



### VTJ LED JELLY JAR



	Lm	W	Lm/W
	2585	20.6	125.7



**FINISH**  
Gray



**MOUNTING**  
Surface mount with  
adjustable arm



# TROFFERS & PANELS



PERFORMANCE

CCT

SPECS

## TAC2 Select

ARCHITECTURAL LED TROFFER



	Lm	W	Lm/W
1' x 4'	3546	25	142
2' x 2'	3536	25	141
2' x 4'	5047	37	137



CCT & Lumen Selectable

**FINISH**  
White



**SIZE**  
2'x4', 2'x2', & 1'x4'




**MOUNTING**  
Surface Mount Kit,  
Drywall Flange Kit



**SENSOR**  
NLC, None



**EMERGENCY**  
4.5W, 8W



## TAC3 Select

SELECT ARCHITECTURAL LED TROFFER



	Lm	W	Lm/W
2' x 2'	3883	27.7	140
2' x 4'	5256	37.8	139



CCT & Lumen Selectable

**FINISH**  
White




**SIZE**  
2'x2' & 2'x4'



**SENSOR**  
None




**EMERGENCY**  
4.5W, 8W



## TAC3S Select

SENSOR READY SELECT ARCHITECTURAL LED TROFFER

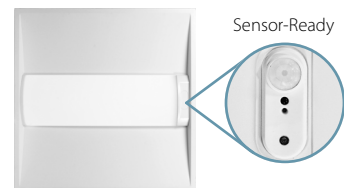

	Lm	W	Lm/W
2' x 2'	2655	19	138
2' x 4'	5446	41	134



CCT & Lumen Selectable

**FINISH**  
White



**SIZE**  
2'x2' & 2'x4'



**SENSOR**  
NLC, None



**EMERGENCY**  
4.5W, 8W




PERFORMANCE

CCT


SPECS

## T7C

LED BACKLIT TROFFER



	Lm	W	Lm/W
1' x 4'	3590	27	131
2' x 2'	4525	35	131
2' x 4'	5689	46	123



**FINISH**  
White



**SIZE**  
2'x4', 2'x2', & 1'x4'



**MOUNTING**  
Surface Mount Kit,  
Drywall Flange Kit



**SENSOR**  
NLC, None



**EMERGENCY**  
4.5W, 8W



## TAR Select v2

ARCHITECTURAL LED TROFFER RETROFIT KIT



	Lm	W	Lm/W
2' x 2'	3694	25	146
2' x 4'	5790	38	151



CCT & Lumen Selectable

**FINISH**  
White



**SIZE**  
2'x4', 2'x2', & 1'x4'



**SENSOR**  
NLC, None




**EMERGENCY**  
4.5W, 8W



## TGL4 Select

LED BACKLIT TROFFER



	Lm	W	Lm/W
2' x 2'	3938	29	137
2' x 4'	4835	39	128



Selectable Wattage & CCT

**FINISH**  
White




**SIZE**  
2'x2' & 2'x4'



**SENSOR**  
None




**EMERGENCY**  
Optional



## TGL4S Select

SENSOR READY SELECT LED BACKLIT TROFFER



	Lm	W	Lm/W
1' x 4'	3142	25	124
2' x 2'	3435	24	142
2' x 4'	4835	39	126



Selectable Wattage & CCT

**FINISH**  
White




**SIZE**  
1'x4', 2'x2' & 2'x4'



**SENSOR**  
Ready



**EMERGENCY**  
Optional



# HIGH/LOW BAYS

## HBC4 LED CIRCULAR LOW BAY/HIGH BAY



	Lm	W	Lm/W
100W	14945	102	147
200W	27998	200	140
240W	34446	241	143
300W	40557	297	137
400W	53747	392	137



40K  
50K

**FINISH**  
White, Black



**CRI**  
80



**SENSOR**  
PIR, MW, NLC, None




**MOUNTING**  
Pendant, Yoke Mount



**VOLTAGES**  
120-277V (UNV),  
277-480V (HV)



**ACCESSORY**  
Glare Shield, Wireguard,  
Reflectors



**EMERGENCY**  
EMB4002BK\*\*



\*\*Compatible with 100W, 150W, 200W, and 240W models only

## HBC5 SELECTABLE LED LOW/HIGH BAY



	Lm	W	Lm/W
150S	17366	120	145
240S	32054	220	146
300S	40509	270	150



**FINISH**  
White, Black



**CRI**  
80



**SENSOR**  
MW, NLC, None



**MOUNTING**  
Pendant, Yoke Mount



**VOLTAGES**  
120-277V (UNV),  
277-480V (HV)



**ACCESSORY**  
Glare Shield, Wireguard,  
Reflectors



**EMERGENCY**  
EMB4002BK\*\*



\*\*Compatible with 100W, 150W, 200W, and 240W models only

## HBC6 SELECTABLE LED LOW/HIGH BAY



	Lm	W	Lm/W
150S	18217	108	170
240S	35470	204	174



Based on 80° Beam Angle

**FINISH**  
Black



**CRI**  
80



**SENSOR**  
PIR, MW, NLC, Remote  
Control



**MOUNTING**  
Pendant, Yoke Mount



**VOLTAGES**  
120-277V



**ACCESSORY**  
Glare Shield, Wireguard,  
Reflectors



**EMERGENCY**  
EMB4002UNVBK  
EMB4002REMOTE



### PERFORMANCE

### CCT

### SPECS

## HBL4 LED LINEAR LOW BAY/HIGH BAY



	Lm	W	Lm/W
105W	14780	106	140
155W	21460	155	139
210W	27302	205	133
300W	41178	305	135

40K  
50K


**CRI**  
80



**SENSOR**  
PIR, MW, NLC, None



**VOLTAGE**  
120-277V (UNV),  
347-480V (HV)



**ACCESSORY**  
Wireguard



## HBN NSF RATED LED HIGH-BAY



	Lm	W	Lm/W
150S	21859	126	174
300S	45026	259	174




**CRI**  
80+



**SENSOR**  
PIR, MW, NLC



**MOUNTING**  
Pre-installed Mounting  
Rings, Surface Mount,  
and Wireguard



## HML1 LED HIGH-PERFORMANCE HIGH BAY



	Lm	W	Lm/W
100W	14200	101	141
130W	18138	129	141
150W	20574	147	140
210W	29258	209	140
300W	42055	305	137
450W	66516	459	144

40K  
50K

**CRI**  
80



**MOUNTING**  
Pendant, Surface Mount,  
Aircraft Cable




**LENS**  
General (A), Wide (B),  
Aisle (C)



**SENSOR**  
PIR, MW, NLC, None



**VOLTAGE**  
120-277V (UNV),  
277-480V (HV)



Based on Standard Distribution

## HML2 LED HIGH-PERFORMANCE HIGH BAY



	Lm	W	Lm/W
320S	38242	269	142

40K




**CRI**  
80




**SENSOR**  
PIR, MW, NLC




**MOUNTING**  
Pendant, Surface Mount,  
Aircraft Cable



**LENS**  
General (A), Wide (B),  
Aisle (C)



**VOLTAGE**  
120-277V (UNV),  
277-480V (HV)



Based on Standard Distribution

## HML3 LED HIGH-PERFORMANCE HIGH BAY



	Lm	W	Lm/W
150S	17263	120	144
320S	39432	270	146




**CRI**  
80




**SENSOR**  
PIR, MW, NLC




**MOUNTING**  
Pendant, Surface Mount,  
Aircraft Cable



**LENS**  
General (A), Wide (B),  
Aisle (C)



**VOLTAGE**  
120-277V (UNV),  
277-480V (HV)



## HML4 LED TRIPLE SELECT HIGH BAY



	Lm	W	Lm/W
160S	17933	114.8	156.3
240S	30291	191.7	158.0
320S	42289	268.1	157.7




**CRI**  
80




**SENSOR**  
Preinstalled Socket  
PIR, MW, NLC



**MOUNTING**  
Pendant, Surface Mount,  
Aircraft Cable




**LENS**  
General (A), Wide (B),  
Aisle (C)



**VOLTAGE**  
120-347V (UNV)



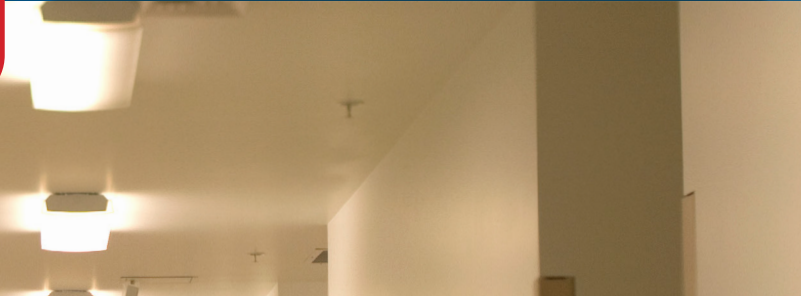

## EMERGENCY LIGHTS

### PERFORMANCE

### SPECS

#### EML1 LED EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	188	1.15	90min

**FINISH**  
White



**REMOTE HEADS**  
ERH 1|2, ERHWP 1|2



**VERSIONS**  
Standard, Remote Capable



#### EML2 LED COMPACT EMERGENCY LIGHT




VAC	Lm	W	EM
120/277	162	2.4	90min

**FINISH**  
White



#### EML3 LED EMERGENCY LIGHT

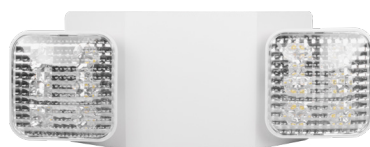

VAC	Lm	W	EM
120/277	203	3.3	90min


**FINISH**  
White



**REMOTE HEADS**  
ERH 1|2 (WP)  
ERH 3|4 (WP)



**VERSIONS**  
Standard, Remote Capable,  
Self Diagnostic



#### EML4 LED COMPACT EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	272	2.1	90min

**FINISH**  
White



#### EML5 LED MICRO EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	180	1.15	90min

**FINISH**  
White



**VERSIONS**  
Standard, Remote Capable



#### EML6 LED EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	265	2.4	90min

**FINISH**  
White



#### EML7 LED HIGH-OUTPUT EMERGENCY LIGHT



VAC	Lm	W	EM
120/277	700	3.5	90min

**FINISH**  
White



## REMOTE HEADS

### PERFORMANCE

### SPECS

#### ERH1|2 LED EMERGENCY LIGHT REMOTE HEAD




	VAC	Lm	W
ERH1	3.6	113.4	1.15
ERH2	3.6	226.8	1.2

**FINISH**  
White



**VERSIONS**  
Standard, Self-Diagnostic



#### ERHWP1|2 LED EMERGENCY LIGHT WEATHER RESISTANT REMOTE HEADS



	VAC	Lm	W
ERHWP1	3.6	128.3	1.3
ERHWP2	3.6	256.6	2.6

**FINISH**  
Gray



**VERSIONS**  
Standard, Self-Diagnostic



#### ERL1 LED EMERGENCY REMOTE HEAD



	VAC	W
ERL1	9.6	1.2

**FINISH**  
White



#### ERL4 LED EMERGENCY WET LOCATION REMOTE HEADS



	VAC	W
ERL4	9.6	2.4

**FINISH**  
White



## EXIT/EMERGENCY COMBOS

### PERFORMANCE

### SPECS

#### ECL1 Select

LED EMERGENCY EXIT SIGN COMBO




VAC	Lm	W	EM
120/277	193	3.8	90min

**LETTER**  
Selectable: Green, Red



**FACES**  
1 Side, 2 Sides



**REMOTE HEADS**  
ECL\*RH, ECL\*RHWH



#### ECL2

SLIM LED EXIT SIGN COMBO



VAC	Lm	W	EM
120/277	156	3.3	90min

**LETTER**  
Green, Red



**FACES**  
1 Side, 2 Sides



#### ECL3

SELF-DIAGNOSTIC LED EXIT SIGN COMBO




VAC	Lm	W	EM
120/277	156	3.3	90min

**LETTER**  
Green, Red



**FACES**  
1 Side, 2 Sides



**REMOTE HEADS**  
ERH 3/4 (WP)



#### ECL5

LED EMERGENCY EXIT SIGN COMBO




VAC	Lm	W	EM
120/277	213	2.9/3.8	90min

**LETTER**  
Green, Red



**FACES**  
1 Side, 2 Sides



## EXIT SIGNS

### PERFORMANCE

### SPECS

#### EXL1

LED EMERGENCY EXIT SIGN



VAC	W	EM
120/277	3.8	90min

**FINISH**  
White



**LETTER**  
Green



#### EXL1-Select

LED EMERGENCY EXIT SIGN



VAC	W	EM
120/277	1.0	90min

**FINISH**  
White



**LETTER**  
Selectable: Green, Red



## EXIT SIGNS

### PERFORMANCE

### SPECS

#### EXL2-10

LED EDGE-LIT EXIT SIGN



VAC	W	EM
120/277	2.3	90min


**FINISH**  
Clear, Mirrored



**LETTER**  
Green, Red



**FACES**  
1 Side, 2 Sides\*



**VERSIONS**  
Standard, Self Diagnostic, AC-Voltage (None-EM)



\*Available on Mirrored models only

#### EXL220

LED EDGE-LIT EXIT SIGN



VAC	W	EM
120/277	2.3	90min

**FINISH**  
Clear, Mirrored



**LETTER**  
Green, Red



**FACES**  
1 Side, 2 Sides\*



\*Available on Mirrored models only

#### EXL230

LED EDGE-LIT EXIT SIGN



VAC	W	EM
120-277	2	90min

**FINISH**  
Clear, Mirrored



**LETTER**  
Selectable Green, Red



**FACES**  
1 Side, 2 Sides\*



\*Available on Mirrored models only (simply remove pre-applied mirror sheet)



#### EXL4

SLIM LED EXIT SIGN




VAC	W	EM
120/277	1.6	90min

**LETTER**  
Green, Red



**FACES**  
1 Side, 2 Sides



#### EXL5

WET LOCATION LED EXIT SIGN



	VAC	W	EM
RD	120/277	2.9/3.6	90min
GR	120/277	2.74/3.5	90min

**FINISH**  
White



**LETTER**  
Green, Red



**FACES**  
1 Side, 2 Sides



#### EXL6

SELF-DIAGNOSTIC CAST-ALUMINUM EXIT SIGN



VAC	W	EM
120/277	5	90min

**FINISH**  
White/White Frame  
White/Aluminum Frame  
Aluminum/Black Frame



**FACES**  
1 Side, 2 Sides



**LETTER**  
Green, Red



## EMERGENCY PACKS

### PERFORMANCE

### EMA

CONSTANT POWER  
EMERGENCY PACK  
(4W/25W/40W)



EMA041UNV



EMA251WRV



EMA401WRV

	OUTPUT (V)	OUTPUT (W)	WEIGHT (LBS)
EMA041UNV	120-277	4	0.39
EMA251WRV	170	25	2.65
EMA401WRV	170	40	2.65

### EMB

NICOR EMERGENCY PACK



EMB4002REMOTE



EMB45



EMB80




EMB4002

	OUTPUT (V)	OUTPUT (W)	WEIGHT (LBS)
EMB45	3-60	4.5	2.4
EMB80	3-60	8.5	3.1
EMB4002	130-190	40	8.8

### EMI

NICOR EMERGENCY  
INVERTER PACK



EMI200



EMI200

	OUTPUT (V)	OUTPUT (W)	WEIGHT (LBS)
EMI200	120	10	--
EMI200	120	20	7.2

## OUTDOOR

### PERFORMANCE

### SPECS

### EMO

SELF-DIAGNOSTIC  
OUTDOOR  
EMERGENCY KIT



OUTPUT (V)	WATTAGE (W)	WEIGHT (LBS)
170	8 or 18	1.54

**FINISH**  
Bronze, White



### EOF

LED EMERGENCY  
OUTDOOR FULL CUTOFF



Lm	W	Lm/W	
1554	17	92	30K
			50K

*Based on 3000K CCT*

**FINISH**  
White, Black\*, Bronze, Silver\*



**CRI**  
70+



**VERSIONS**  
Standard, Self-Diagnostic,  
Cold Weather, AC-Voltage  
(Non-EM)



*\*Subject to minimum order quantity (MOQ).  
Please check factory for additional lead times.*

### EOT

LED EMERGENCY  
OUTDOOR TEAR DROP



Lm	W	Lm/W	
1074	13	80	27K
			50K

*Based on 2000K CCT*

**FINISH**  
Bronze, Silver



**CRI**  
80+



**VERSIONS**  
Standard, Self-Diagnostic,  
Cold Weather, AC-Voltage  
(None-EM)



### EOT2

LED EMERGENCY  
OUTDOOR TEAR DROP



Lm	W	Lm/W
1815	13	137

*Based on 4000K CCT*



**FINISH**  
Bronze, White



**CRI**  
80+



**VERSIONS**  
Standard, Cold Weather,  
AC-Voltage (Non-EM)



# HAZARDOUS LOCATION



PERFORMANCE

CCT

SPECS

## XPL LED LINEAR LUMINAIRE



1A	Lm	W	Lm/W
40W	4213	38	111
80W	8723	81	108

1B	Lm	W	Lm/W
40W	5267	41	129
80W	10994	80	137

Based on 4000K CCT

30K\*  
40K\*  
50K

\*Consult for lead time

### FINISH

Gray



### CLASS 1A

C1D1 | Group: C, D  
C1D2 | Group: A, B, C, D

### CLASS 1B

C1D2 | Group: A, B, C, D  
C2D1 | Group: E, F, G  
C2D2 | Group: F, G  
C3

### EMERGENCY

XPL1A080U50GR  
XPL1B040U50GR  
XPL1B080U50GR

See spec. sheet for more details.

## XPR LED AREA LIGHT



	Lm	W	Lm/W
45W	6426	42	152
65W	9416	65	145

Based on 4000K CCT

30K\*  
40K\*  
50K

\*Consult for lead time

### FINISH

Gray



### CLASS 1B

C1D2 | Group: A, B, C, D  
C2D1 | Group: E, F, G  
C2D2 | Group: F, G

## XPQ LED FLOOD LIGHT HIGH BAY



1A	Lm	W	Lm/W
80W	9055	74	123
100W	11927	98	122
150W	16916	140	121

1B	Lm	W	Lm/W
80W	9055	74	123
100W	11927	98	122
150W	16916	140	121

Based on 4000K CCT

30K\*  
40K\*  
50K

\*Consult for lead time

### FINISH

Gray



### CLASS 1A

C1D1 | Group: C, D  
C1D2 | Group: A, B, C, D  
C2D2 | Group: F, G

### CLASS 1B

C1D2 | Group: A, B, C, D  
C2D2 | Group: F, G

# OUTDOOR



AREA LIGHTS

PERFORMANCE

CCT

SPECS

## OAL3 LED AREA LIGHT



	Lm	W	Lm/W
150S	15991	120	133
200W*	27397	201	136
300S	32637	249	131

Based on Type III Optic, 5000K CCT  
\*Single Wattage only



### FINISH

Bronze, White



### OPTICS

Type III, Type V



### SENSOR

3-Pin, 7-Pin, Motion Sensor



### MOUNTING

Pole Arm, Wall Box, Slipfitter, Straight Arm, Trunnion



## OAL4 LED AREA LIGHT



	Lm	W	Lm/W
150S	17991	116	156
300S	36144	229	158

Based on Type III, 4000K CCT, Medium Wattage



### FINISH

Bronze, White



### OPTICS

A (Type II/IV/V)  
B (Type II/III/IV)




### SENSOR

3-Pin, 7-Pin, MW Sensor



### MOUNTING

Pole Arm, Wall Box, Slipfitter, Straight Arm, Trunnion



## OAL5 LED AREA LIGHT



	Lm	W	Lm/W
8923	61	147	

Based on Type III, 4000K CCT, Medium Wattage



### FINISH

Bronze




### SENSOR

Motion Sensor Socket (12V)



### OPTICS

Type II, Type III, Type IV, Type V



## OPL AREA LIGHT POLES



### FINISH

Bronze, White, Black



### SHAPES

Round, Round Tapered, Square



### DIAMETER

Round: 3" to 9"  
Square: 3" to 9"



### LENGTHS

All lengths available upon request



### MATERIAL

Steel, Aluminum



### MOUNT ACCESSORIES

Wall Bracket, Round Pole, Low Profile, Triple Tenon



Pre-drilled hole patterns available upon request.

## BARN LIGHTS

### PERFORMANCE

### CCT

### SPECS

#### ODL4 LED DUSK TO DAWN




	Lm	W	Lm/W
60S	6267	45	139
120S	11937	90	133



**FINISH**  
Bronze, Gray

**SENSOR**  
Photocell



## BOLLARDS

### PERFORMANCE

### CCT

### SPECS

#### OBH LED BOLLARD



	Lm	W	Lm/W
	430	10	61



**FINISH**  
Stone Gray, Gray Aluminum



#### OBL2 LED BOLLARD



	Lm	W	Lm/W
Louver	1368	17	76
Cone	2895	18	162



**FINISH**  
Bronze

**SENSOR**  
None



## CANOPIES

### PERFORMANCE

### CCT

### SPECS

#### OGS LED GARAGE LIGHT




	Lm	W	Lm/W
85W	8203	83	98

*Based on 3000K CCT*



**FINISH**  
Bronze

**SENSOR**  
Photocell, Motion Sensor, None




#### OUC3 LED CANOPY




	Lm	W	Lm/W
45W	5412	42	130
80W*	9934	79	126

*\*Available in 4000K only*



**FINISH**  
Bronze

**SENSOR**  
Photocell, Motion Sensor, None



#### OUC4 LED CANOPY



	Lm	W	Lm/W
75S	7812	60	130
120S	12438	96	130



**FINISH**  
Bronze, White


**SENSOR**  
Photocell (Standard), Motion Sensor



#### OUS LED SPECIFICATION CANOPY




	Lm	W	Lm/W
45W	5529	44	126
80W	10456	81	130



**FINISH**  
Bronze

**SENSOR**  
Photocell, None



## CYLINDERS

### PERFORMANCE

### CCT

### SPECS

#### OWC LED WALL MOUNT CYLINDER




	Lm	W	Lm/W
RD (DN)	2351	21	110
RD (UP)	3355	34	100
SQ (DN)	2290	21	109
SQ (UP)	3200	34	95
FAN	1436	34	42



**FINISH**  
Bronze, White

**SHAPE**  
Round, Square, Square Fan

**CONFIGURATION**  
Up, Down, Up/Down



#### OWCR LED WALL-MOUNT CYLINDER



	Lm	W	Lm/W
4" (Half)	834	9	96
4" (Full)	1654	17	96
6" (Half)	1389	16	88
6" (Full)	2755	30	92

*Based on 40° Optics*



**FINISH**  
Bronze

**SENSOR**  
None



## FLOOD LIGHTS

### PERFORMANCE

### CCT

### SPECS

#### OFL2 LED FLOOD LIGHT



	Lm	W	Lm/W
12W	1238	12	106
30W	3071	29	106
50W	5363	51	106

*Based on 3000K CCT*



**FINISH**  
Bronze

**MOUNTING**  
Knuckle, Yoke\*

*\*Available on 50W, 3000K only*



#### OFL4 ROUND-BACK LED FLOOD LIGHT




	Lm	W	Lm/W
35W	3771	25	152
60W	6725	41	163
80W	8867	55	162
150W	17793	117	152
320W	39027	250	156

*Based on 6H6V NEMA Pattern*



**FINISH**  
Bronze, White

**SENSOR**  
None



#### OFS LED FLOOD LIGHT



	Lm	W	Lm/W
35S	5005	35	143
50S	7150	50	143



**FINISH**  
Bronze

**MOUNTING**  
Knuckle, Yoke



#### OLS LED SECURITY FLOOD LIGHT



	Lm	W	Lm/W
16W	2329	18.4	126.9
25W	3257	27.3	119.4

*Based on 5000K CCT | Night Light Function ON*




**FINISH**  
Black, Bronze, White

**MOUNTING**  
Mounting Bracket

**SENSOR**  
PIR

**SECURITY**  
108-lumen night light

**DUAL-HEAD TILT**  
360° rotation & 180° tilt



SCONCES

PERFORMANCE

CCT

SPECS

**OSA**  
LED ADJUSTABLE  
SCONCE



	Lm	W	Lm/W
30W	3239	28	116
50W	5193	48	108
80W	9056	80	113
120W	13796	124	111

40K  
50K

**FINISH**  
Bronze, White



**SENSOR**  
Photocell, None



**OSA3**  
LED ADJUSTABLE  
SCONCE



	Lm	W	Lm/W
50W	6982	50	139
120W	17239	124	140



**FINISH**  
Bronze



**SENSOR**  
Photocell, None



**OSA4**  
LED ADJUSTABLE  
SCONCE



	Lm	W	Lm/W
30S	3176	25	127
50S	5319	40	132
80S	9692	70	138



**FINISH**  
Bronze, White, Black



**SENSOR**  
Photocell, Motion



WALL PACKS

PERFORMANCE

CCT

SPECS

**OWF**  
LED WALL PACK



	Lm	W	Lm/W
50W	5656	46	122
80W	8789	80	110

40K  
50K

**FINISH**  
Bronze, White



**SENSOR**  
Photocell



**OWF4**  
LED WALL PACK



	Lm	W	Lm/W
40S	5558	43	129
60S	8337	65	129
80S	11116	86	129



**FINISH**  
Bronze



**SENSOR**  
12V Socket, None



**EMERGENCY**  
8W, None



WALL PACKS

PERFORMANCE

CCT

SPECS

**OWG4**  
LED WALL PACK



	Lm	W	Lm/W
100W	13146	98	133
100S	10517	78	134



Optional Selectable  
Wattage Available

**FINISH**  
Bronze



**SENSOR**  
Photocell, None



**EMERGENCY**  
8W, None



**OWG5**  
LED WALL PACK



	Lm	W	Lm/W
60S	8185	43	173
80S	10035	63	158
120S	14458	92	158

Based on Mid Throw



**FINISH**  
Bronze



**SENSOR**  
Photocell with  
optional 12V Socket



**EMERGENCY**  
9W, None



**OWP2**  
FULL CUT-OFF  
LED WALL PACK



	Lm	W	Lm/W
60S	7536	47	162
100S	12650	77	164

Based on Type III Distribution



**FINISH**  
Bronze




**SENSOR**  
Photocell with  
optional 12V Socket



**EMERGENCY**  
9W, None



**OPTICS**  
Type II/III/IV



**OWR3**  
LED WALL PACK



	Lm	W	Lm/W
30W	3643	30	123

Based on 5000K CCT

50K

**FINISH**  
Bronze



**SENSOR**  
Photocell (Standard)



**OWT**  
HALF MOON  
LED WALL PACK



	Lm	W	Lm/W
80S (Down)	10288	62	165
80S (Full)	10290	62	165

Based on Type III Distribution



**FINISH**  
Bronze




**SENSOR**  
Photocell with  
optional 12V Socket



**EMERGENCY**  
9W, None



**OPTICS**  
Type II/IV/V



Simplify Your Life with  
NICOR Network Lighting Controls

3 Levels of Lighting Control



Single Luminaire



Room



Building

POWER PACK &  
NLC CONTROLLERS

**NLCPS1**  
12V Power Supply



**NLCPC1**  
20A Plug Load  
Controller



**NLCPC2**  
3A Fixture Controller



**NLCMUL924**  
Emergency Lighting  
Controller



NLC SWITCHES

**NLCW31WH**  
3-Button Wireless Dimming  
Switch



**NLCW51WH**  
5-Button Wireless with  
Selection Switch



**NLCWP1WH**  
Wall-Mount Switch Base with  
Faceplate



NLC SENSORS

**NLCSPCW1WH**  
Ceiling Mount Sensor



**NLCSPCWNBWH**  
Non-Bluetooth Sensor



**NLCSPCMOUNT1**  
SPC Mount



**NLCSPIHW1WH**  
Center Basket Troffer Sensor



**NLCSPFW1WH**  
Flat Panel Troffer Sensor



**NLCSPFW1WH**  
Knock-Out Mount Sensor  
Requires lens. Choose from  
77°, 90°, and 103° lens.



**NLCSPJ1WH**  
3.5mm Sensor  
Requires lens. Choose from  
77°, 90°, and 103° lens.



**NLCSPSS1WH**  
Snap-in Passive Infrared Sensor



NLC ACCESSORIES

**HBCSOCKETADAPT1**  
HBC Adaptor: 3-pin to 3.5mm



**NLCSC1WH**  
6.5ft Plenum rated Sensor Cable



**NLCSC2WH**  
6.5ft Plenum rated Sensor Cable with  
Connector



**H12VADJARM1WH**  
Adjustable 3.5mm Adaptor



**H12VSOCKET**  
3.5mm socket



**NLCE1**  
Energy Monitor



NLC SENSOR LENSES

**NLCLHW1WH**  
90° Beam Angle Lens



**NLCLHN1WH**  
77° Beam Angle Lens




**NLCLMW1WH**  
103° Beam Angle Lens



Compatible with [NLCSPFW1WH](#) and [NLCSPJ1WH](#)

Explore a wide range of products with **NICOR** brochures and catalogs to uncover additional lighting solutions.



Scan QR for the  
**LATEST**  
Brochure




## Warehouse Locations

Albuquerque, NM  
Buford, GA  
Roseville, CA

T. 800.821.6283  
F. 800.892.8393  
E. [sales@nicorlighting.com](mailto:sales@nicorlighting.com)

2200 Midtown Pl. NE  
Albuquerque, NM 87107 USA  
[www.nicorlighting.com](http://www.nicorlighting.com)



Scan QR for the latest  
Quick-Reference Guide



LIT-QRG  
20250905  
©2025 NICOR® • ALL RIGHTS RESERVED

**NICOR**®