
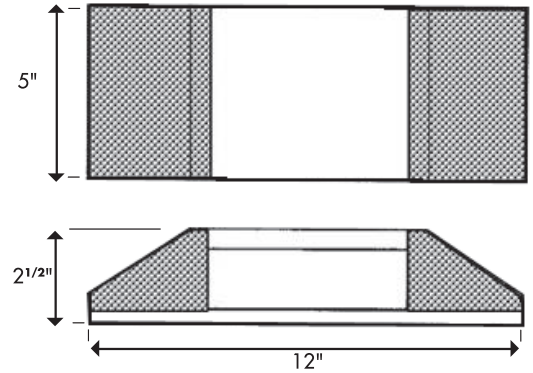


Project *Comments*

Catalog # *Prepared By*

Type *Date*

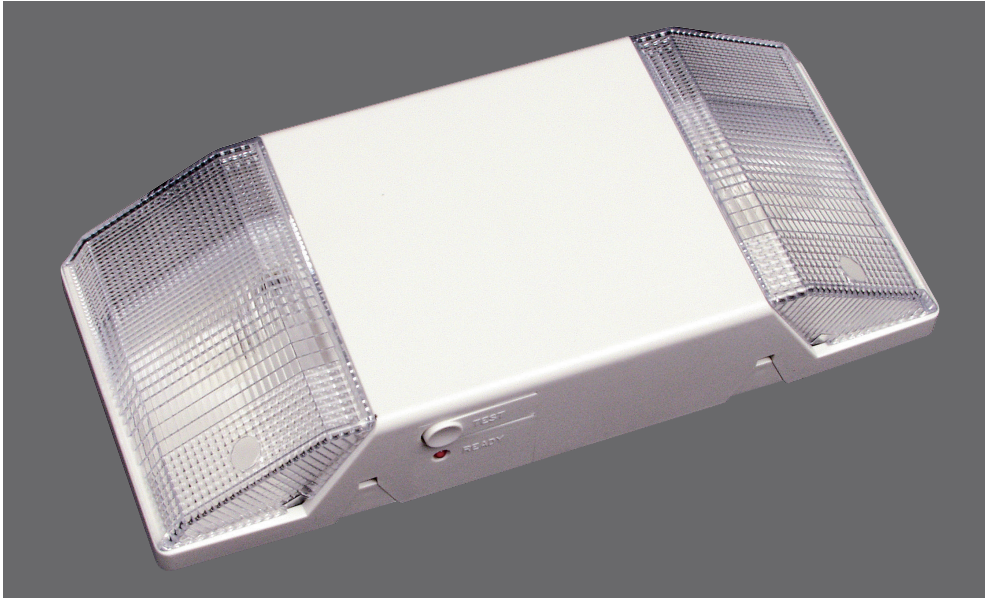

FEATURES

- Completely self-contained, fully automatic operation.
- Compact low-profile design in neutral finish.
- Universal mounting plate w/ Quick Connect for rapid installation.
- Push-to-test switch.
- 6-volt pure lead maintenance-free battery.
- Environmentally-coated solid state charger.
- Automatic low voltage disconnect (LVD).
- Universal transformer for 120 or 277 VAC.
- V-O flame retardant, high-impact thermoplastic housing.
- Charge rate/power-on LED indicator light.
- Damp location listed.
- Operation time - 90 minutes.
- Lamp - 2X5.4W.
- Warranty - yes.

ORDERING

Product No.	Housing Color
• 18102	White
• 18102BK	Black

