

ACW LED Wraparound



Never Change a Fluorescent Lamp Again

Save on Energy
Over 70 lumens per watt



Lumen Output
Option available for up
to 5200 Lumens



2 Lamp Options
Available in both
2 or 4 Lamps
equivalencies



ACW

LED Wraparound

The NICOR™ LED Wraparound offers general ambient lighting for surface mount ceiling applications. The ACW is the perfect energy-saving replacement for both remodel and new construction in residential and light commercial applications such as kitchens, garages, utility rooms, schools, offices and hospitals.

Construction

Heavy 20 gauge steel construction

Optical System

Clear prismatic acrylic lens

Electrical

Utilizes high performing LEDs

Operating temperature rating of 0F to 120°F (-18°C – 49°C)

Input voltage of 120V

L70 rated for >60,000 life hours

LM-79, LM-80 testing performed in accordance with IESNA standards.

Available in 2 or 4 lamp equivalences with lumen output of 2590 or 5206

Finish


White powder coat finish

Installation

Easy surface mount installation


Warranty

5-year limited system warranty standard

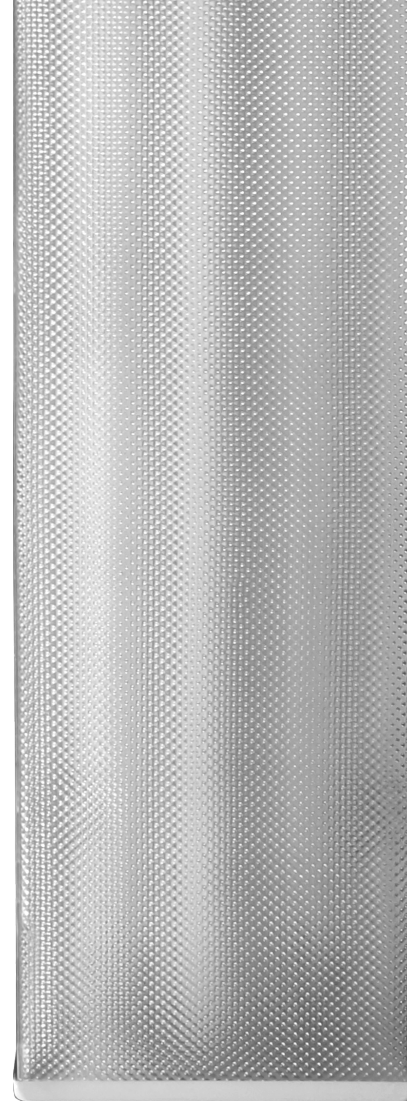

Product Information

	ACW-10-42-120-40K	ACW-10-44-120-40K
LED Lifetime (Hrs):	>60,000	>60,000
Input Voltage (V):	120V	120V
Power Draw (W):	36.70W	73.30W
Delivered Lumens (Lm)	2590	5206
System Efficacy (Lm/W)	71	71
Correlated Color Temp (K)	4076	4022
Fixture Height:	2.5 in. (63mm)	2.5 in. (63mm)
Trim Width:	8.5 in. (216mm)	11 in. (279mm)
Lenght:	49 in. (1245mm)	49 in. (1244mm)

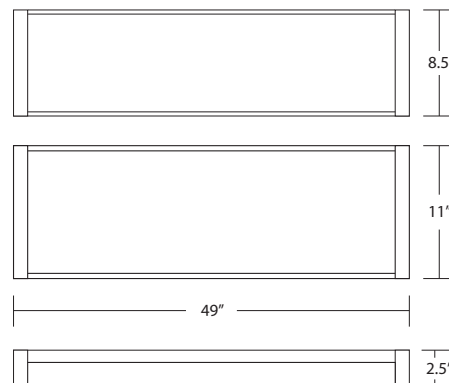

Ordering Information

Example: ACW-10-44-120-30K

Series	Version	Lamp Equivalent	Voltage(V)	CCT's
ACW	10	42 (2 lamp) 2590lm	120	30K (3000)
		44 (4 lamp) 5206lm		40K (4000)