


<i>Project</i>	<i>Comments</i>
<i>Catalog #</i>	<i>Prepared By</i>
<i>Type</i>	<i>Date</i>

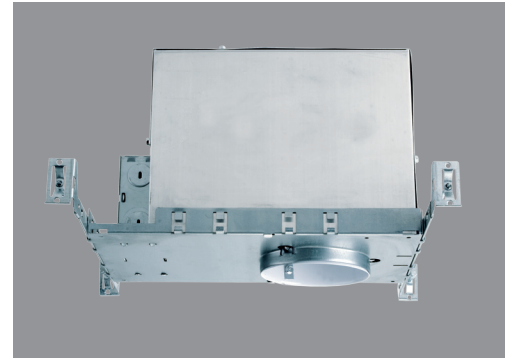

DESCRIPTION

- Suitable for new construction in residential and commercial applications.
- IC rated. Suitable for direct contact with insulation.

HOUSING

- Integral thermal protector, guards against improper lamping and misuse of insulation materials.
- Washington State Energy Code approved to meet restricted airflow requirements.
- Adjustable socket bracket assures proper and consistent lamp positioning.
- 7 1/4" height allows use in 2" x 8" joist construction.
- Uses low voltage 120V MR-16 (not included) with a GU10 base.

PLASTER FRAME

- Housing is secured to plaster frame with screws and can be removed for access to junction box.
- Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

JUNCTION BOX


- Listed for through branch circuit wiring and includes several 3/4" knockouts.
- Four pry-outs with integral strain relief simplify Romex installation.
- Supplied with three IDEAL® push-in wire connectors.











HANGER BARS


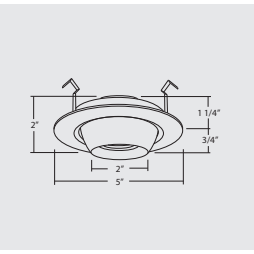
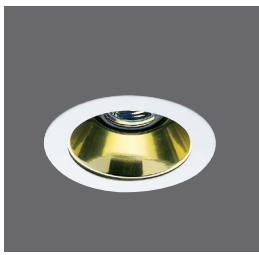
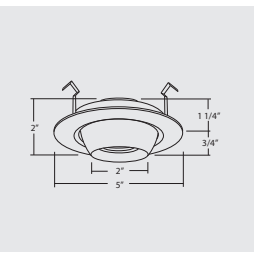

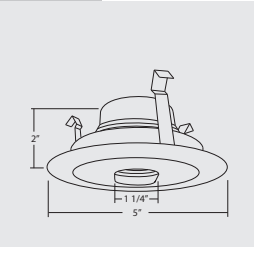

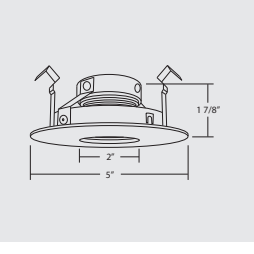

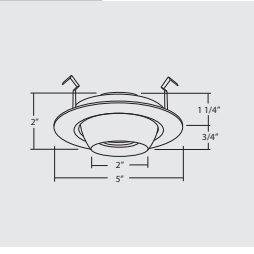

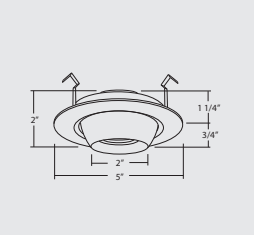
- Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws.
- Unique hanger bar lip design helps align can to joist.
- Four double-headed captive nails provide for ease of installation.
- Bars can be repositioned 90° on plaster frame without tools.
- Bars fit onto T-bar spine for quick alignment and can be permanently secured.
- Score lines allow bars to be shortened without tools to accommodate a 12" joist span.













LISTINGS



- UL damp location
- UL feed-through
- CUL

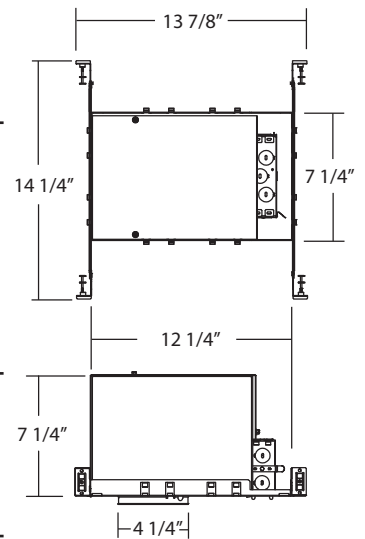


	Order No	Description	Maximum Lamp Rating	
	14001BK 14001WH	Wall Wash Black White (shown)	50W 12 MR-16 OD: 5"	
	Order No	Description	Maximum Lamp Rating	
	14002BK	Baffle Black (black ring)	50W 12 MR-16 OD: 5"	
	14002BZ	Bronze (white ring)		
	14002NK	Nickel		
	14002WH	White (white ring - shown)		
	14002OB-ABZ	Oil Rubbed Bronze (aged bronze ring)		
14002OB-OB	Oil Rubbed Bronze (oil rubbed bronze ring)			
	Order No	Description	Maximum Lamp Rating	
	14003	Baffle Black	50W 12 MR-16 OD: 5"	
	Order No	Description	Maximum Lamp Rating	
	14004	Specular Black	50W 12 MR-16 OD: 5"	
	Order No	Description	Maximum Lamp Rating	
	14005	Wall Wash Clear	50W 12 MR-16 OD: 5"	
	14020CL	Clear (with chrome ring - shown)		
14005WHZ-ABZ	Wheat Haze (aged bronze ring)			

	Order No	Description	Maximum Lamp Rating	
	14006BK	Eyeball - Baffle Black (shown)	50W 12 MR-16 OD: 5"	
	14006OB	Oil Rubbed Bronze		
	14006PB	Polished Brass		
	14006WH	White		
	Order No	Description	Maximum Lamp Rating	
	14007	Specular Gold (shown)	50W 12 MR-16 OD: 5"	
	14007GD	Gold (with gold ring)		
	Order No	Description	Maximum Lamp Rating	
	14008	Slotted Aperture White	50W 12 MR-16 OD: 5"	
	Order No	Description	Maximum Lamp Rating	
	14009	Pin Hole - Black Baffle White	50W 12 MR-16 OD: 5"	
	Order No	Description	Maximum Lamp Rating	
	14014	Surface Glass Frosted White	50W 12 MR-16 OD: 5"	
	Order No	Description	Maximum Lamp Rating	
	14015WH	Eyeball White	50W 12 MR-16 OD: 5"	

	Order No	Description	Maximum Lamp Rating	
	14016WH	Slotted Aperture White	50W 12 MR-16 OD: 5"	
	14016BK	Black		
	Order No	Description	Maximum Lamp Rating	
	14019	Pin Hole White	50W 12 MR-16 OD: 5"	
	Order No	Description	Maximum Lamp Rating	
	14021	Adjustable Drop Spot White	50W 12 MR-16 OD: 5"	
	Order No	Description	Maximum Lamp Rating	
	14022BK	Black	50W 12 MR-16 OD: 5"	
	14022NK	Nickel		
	14022OB	Oil-Rubbed Bronze		
	14022WH	White (shown)		
	Order No	Description	Maximum Lamp Rating	
	14023BK	Black	50W 12 MR-16 OD: 5"	
	14023NK	Nickel		
	14023OB	Oil-Rubbed Bronze		
	14023WH	White		
	Order No	Description	Maximum Lamp Rating	
	14509WH	Shower Trim White	50W 12 MR-16 OD: 5"	

	Order No	Description	Maximum Lamp Rating	
	14558WH	Gimbal Ring White	50W 12 MR-16 OD: 5"	
14016BK	Black			

	Order No	Description	Maximum Lamp Rating	
	GU10WHIP	To convert 4" lin voltage PAR20/R20 housing to 120V MR-16 GU10 lamp.	GU10 120V MR-16 Max Wattage per Trim and Housing Combo	