

30035-LED

10" Indoor LED Wall Sconce

Product Description

This wall sconce features a contemporary brushed nickel finish with a 10" white alabaster swirled glass. This striking combination of metal and glass adds elegance to any room.

- Input Voltage: 120 VAC
- Watts: 13.8W
- CRI: 80+
- Color Temp: 3000K, 4000K
- Housing Color: Nickel Finish, Alabaster Glass

Project


Catalog

Type

Date




Thickness
4.2 in
(107mm)

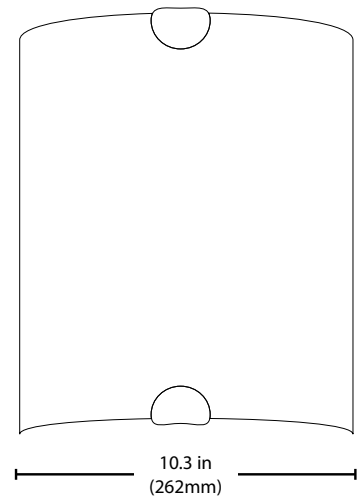

Photometric Data

30035 3000K

Input Voltage (VAC)	120
System Level Power (W)	13.8
Delivered Lumens (Lm)	1150
System Efficacy (Lm/W)	83.3
Correlated Color Temp (K)	3000
Color Rendering Index (CRI)	>80
Beam Angle	132°
Spacing Criteria	1.38

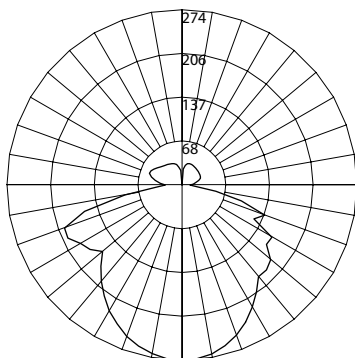

Intensity Summary (Candle Power)

Angle	Mean CP
0	274
5	272
15	262
25	243
35	217
45	187
55	157
65	130
75	98
85	59
90	48

Cone of Light Tabulation

Mounted height (Feet)	Footcandles Beam Center	Diameter (Feet)
4	17.1	5.0
6	7.6	7.5
8	4.3	10.0
10	2.7	12.7

Zonal Lumen Summary

Zone	Lumens	% of Luminaire
0-30	211	18.4
0-40	347	30.1
0-60	630	54.8
0-90	926	80.5
90-180	225	19.5
0-180	1150	100.0

Performance Data

Model Number	Lumens	Watts	Lumens/Watt
30035-LED-NK-30K	1150	13.8	83.3
30035-LED-NK-40K	1187	13.8	86.0

CCT Data Multiplier

30035-LED-NK-40K	1.030
------------------	-------

Ordering Information

Example: 30035-LED-NK-40K

Series	Finish	CCT's
30035-LED	NK (Nickel)	30K (3000 K) 40K (4000 K)

Specifications and dimensions subject to change without notice.