

Project *Comments*

Catalog # *Prepared By*

Type *Date*




DESCRIPTION

- Suitable for new construction in commercial applications where uniform light distribution is required.
- NON-IC. Insulation must be kept a minimum of 3" from housing.


FRAME-IN

- Designed for horizontally mounted compact fluorescent lamp.
- 120-277V Universal input electronic ballast.
- Ballast includes integral thermal protector for over-lamping.
- Lamp type: 1X26W, 32W, 42W 4-pin. G24Q (not included).
- Universal mounting bracket accepts #17203 flat bar hanger, #17208 C-channel bar and 1/2" EMT.

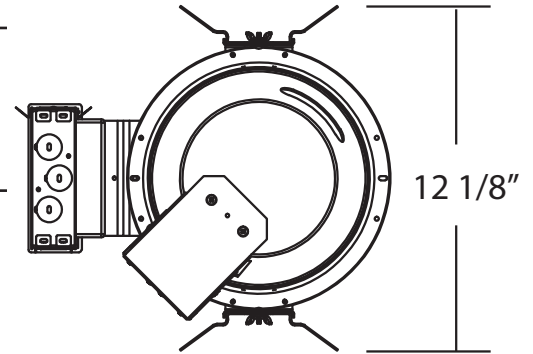

JUNCTION BOX

- Listed for through branch circuit wiring and includes several 3/4" knockouts for commercial wiring.
- Supplied with three IDEAL® push-in wire connectors.

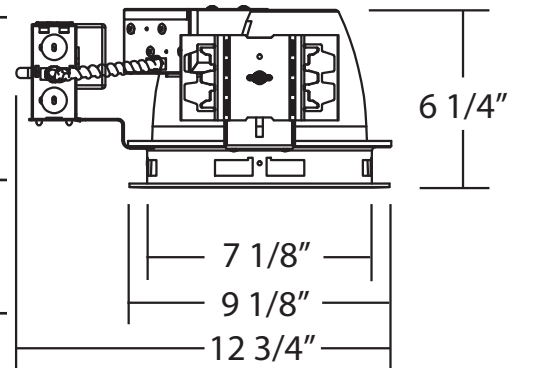

HANGER BAR BRACKET

- Universal brackets accept C-channel or flat bar hangers (ordered separately); alternately, use rigid 1/2" steel conduit for tie-down to ceiling grids.

EMERGENCY OPTION

- NICOR emergency ballast 650L4FEB provides 650 Lumen for minimum 90 minutes in the event of a power failure.

LISTINGS

- UL damp location
- UL feed-through
- CUL




**27800EBM 8" 1X26-42W Compact Fluorescent
Architectural Horizontal Frame-In**



	Order No	Description	Maximum Lamp Rating	
	17815CL	Reflector Clear (shown)	OD: 9&1/8"	
	Order No	Description	Maximum Lamp Rating	
	17817CL	Reflector with Clear Lens Clear (shown)	OD: 9&1/8"	
	17817WH	White		
	Order No	Description	Maximum Lamp Rating	
	17832BK	Baffle Reflector Black (shown)	OD: 9&1/8"	
	17832WH	White		
	Order No	Description	Maximum Lamp Rating	
	17835BK	Baffle Wall Wash Black (shown)	OD: 9&1/8"	
	17835WH	White		
	Order No	Description	Maximum Lamp Rating	
	17838BK	Reflector with Albalite Lens Black (shown)	OD: 9&1/8"	
	17838WH	White		
	Order No	Description	Maximum Lamp Rating	
	17840BK	Reflector with Lifted Glass Black	OD: 9&1/8"	
	17840WH	White (shown)		



Order No	Description	Maximum Lamp Rating
	Reflector with Louver	OD: 9&1/8"
17842CL	Clear (shown)	
17842GD	Gold	

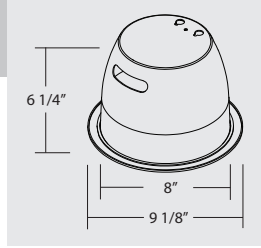

Order No	Description	Maximum Lamp Rating
	Wall Wash	OD: 9&1/8"
17844CL	Clear	
17844GD	Gold (shown)	

