

17008AREB26

6" 1X26w Double Twin Fluorescent Remodel Compact Housing

Product Description

Suitable for remodel in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.
Use one 26W double twin tube G24Q-1 (not included).

Construction

Aluminum construction provides greater heat dissipation.
Electronic Ballast includes integral thermal protector guards against improper lamping and misuse of insulation materials.
120V Electronic ballast.
7 1/2" height allows use in 2" x 8" joist construction.

Junction Box

Listed for through branch circuit wiring and includes several 1/2" knockouts. Four pry-outs with integral strain relief simplify Romex installation.
Supplied with three push-in wire connectors.

Installation


Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation.
Bars can be repositioned 90° on plaster frame without tools.
Bars fit onto T-bar spine for quick alignment and can be permanently secured.
Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

Project


Catalog


Type

Date

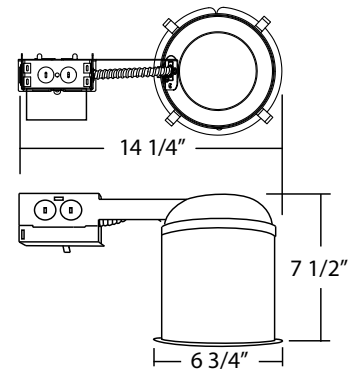


17010AEBM2642 | 6" 1X26W, 32W, or 42W Vertical Fluorescent Housing


Fresnel Lens	Order No	Color	Maximum Lamp Rating
	17502BZ	Bronze (shown)	OD: 8" Wet Location Rated
	17502R	White (with reflector)	
	17502OB	Oil-Rubbed Bronze	
	17502	White (with metal trim ring)	
	17572WH	White (with plastic trim ring)	


Lexan Shower Albalite Lens	Order No	Color	Maximum Lamp Rating
	17505BZ	Bronze (shown)	OD: 8" Wet Location Rated
	17505NK	Nickel	
	17505R	White (with reflector)	
	17505OB	Oil-Rubbed Bronze	
	17575	White (with plastic trim ring)	

Lexan Drop Opal	Order No	Color	Maximum Lamp Rating
	17509R	White (with reflector)	OD: 8" Wet Location Rated
	17509	White (shown with metal trim ring)	
	17509WH	White (with plastic trim ring)	


Specular Reflector	Order No	Color	Maximum Lamp Rating
	17518CL	Clear	OD: 7 1/4"
	17518WH	White	

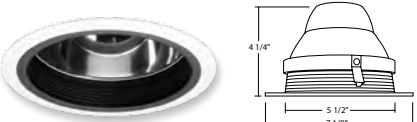Reflector Baffle	Order No	Color	Maximum Lamp Rating
	17520CL	Clear (Black/baffle)	OD: 7 1/8"
	17520CLWH	Clear (White/baffle)	


Baffle Fresnel Lens	Order No	Color	Maximum Lamp Rating
	17522BK	Black	OD: 7"
	17522WH	White	


Baffle Albalite Lens	Order No	Color	Maximum Lamp Rating
	17523BK	Black	OD: 7"
	17523WH	White	


17010AEBM2642 | 6" 1X26W, 32W, or 42W Vertical Fluorescent Housing

Baffle Drop Opal	Order No	Color	Maximum Lamp Rating
	17524BK	Bronze (shown)	OD: 7 1/4"
	17524WH	White (with reflector)	

Baffle Cone	Order No	Color	Maximum Lamp Rating
	17525BK	Black	OD: 7 1/2"
	17525BZ	Bronze	
	17525NK	Nickel	
	17525OB	Oil-Rubbed Bronze	
	17525WH	White	

Wall Wash Baffle	Order No	Color	Maximum Lamp Rating
	17537BK	Black	OD: 7 1/4"
	17537WH	White	

Wall Washer Reflector	Order No	Color	Maximum Lamp Rating
	17540BK	Black	OD: 7 1/4"
	17540CL	Clear	
	17540WH	White	

Reflector Fresnel Lens	Order No	Color	Maximum Lamp Rating
	17604	Clear	OD: 7 1/4" Also requires 17600 Frame Insert